

JEWELRY

RECESSED



EFFECT 28X TUNABLE 01



EFFECT 28X COLOR 02




EFFECT 28X 03



EFFECT 14X 04



EFFECT 7X 05



EFFECT 28S TUNABLE 06



EFFECT 28S COLOR 07



EFFECT 28S 08



EFFECT 16S 09



EFFECT 9S 10



EFFECT 28C TUNABLE 11



EFFECT 28C COLOR 12




EFFECT 28C 13




EFFECT 16C 14




EFFECT 6C 15




BLADE 24C 16




BLADE 12C 17



BLADE 6C 18



BLADE 25X 20



BLADE 20X 21



BLADE 15X 22




BLADE 10X 23




BLADE 5X 24


SURFACE



BLADE 24SM 25



BLADE 12SM 26



BLADE 6SM 27



BLADE 25X SM 28



BLADE 20X SM 29



BLADE 15X SM 30




BLADE 10X SM 31




BLADE 5X SM 32


FOOTED




FOOTED 3X 33



FOOTED 1X 34



FOOTED 1S 35



LINE 36




LINE PIPE 37

Effect 28X Tunable



Recessed

Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 28X Tunable	on-off/DALI	48W	8880LM	90	220V-240V AC

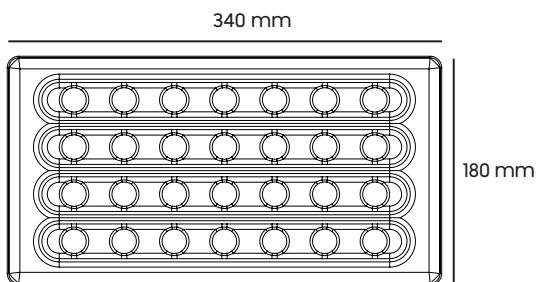

Effect 28X Color

Recessed



Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 28X Color	on-off/DALI	48W	8880LM	90	220V-240V AC

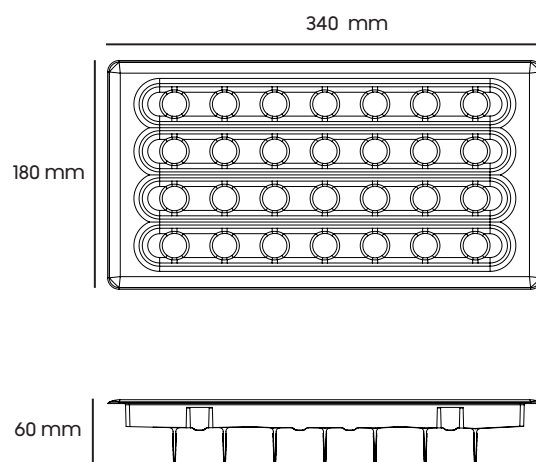


Effect 28X



Recessed

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 28X	on-off/DALI	48W	8880LM	90	220V-240V AC

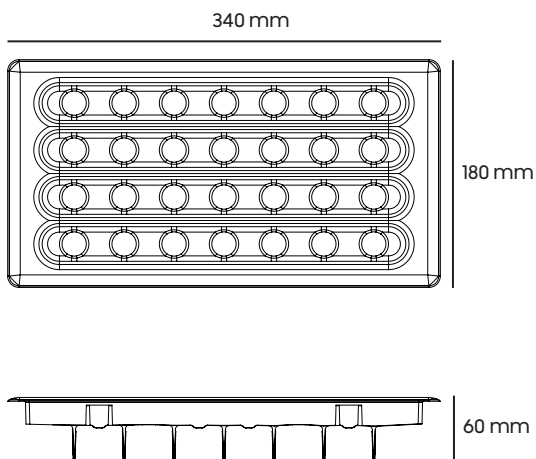

Effect 14X

Recessed



Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 14X	on-off/DALI	24W	4440LM	90	220V-240V AC


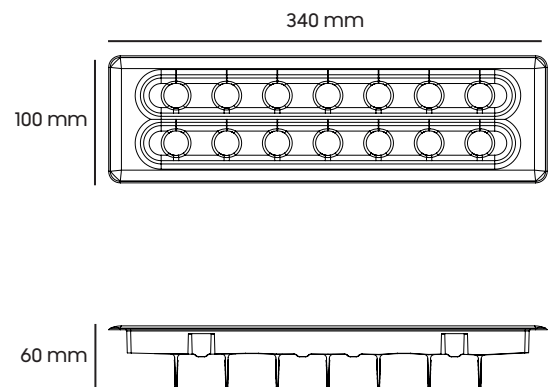


Effect 7X



Recessed

Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 7X	on-off/DALI	14W	2220LM	90	220V-240V AC




Effect 28S Tunable

Recessed



Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 28S Tunable	on-off/DALI	48W	8880LM	90	220V-240V AC


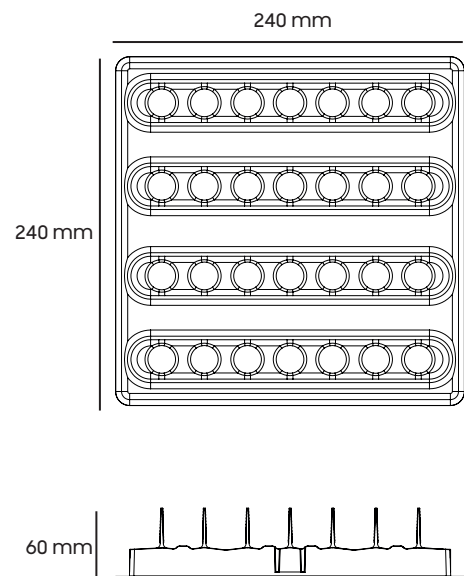


Effect 28S Color



Recessed

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 28S Color	on-off/DALI	48W	8880LM	90	220V-240V AC

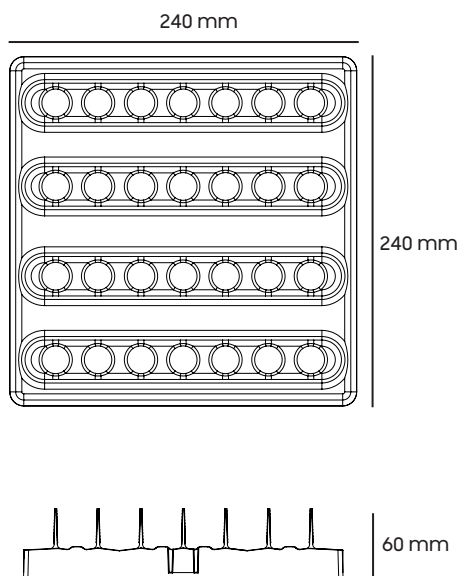


Effect 28S

Recessed



Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 28S	on-off/DALI	48W	8880LM	90	220V-240V AC


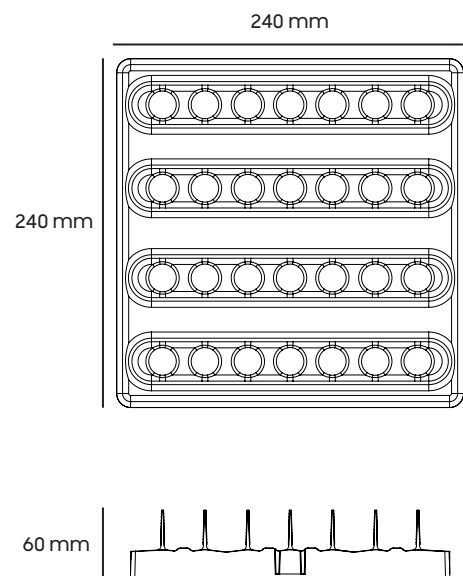


Effect 16S




Recessed

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 16S	on-off/DALI	28W	5074LM	90	220V-240V AC

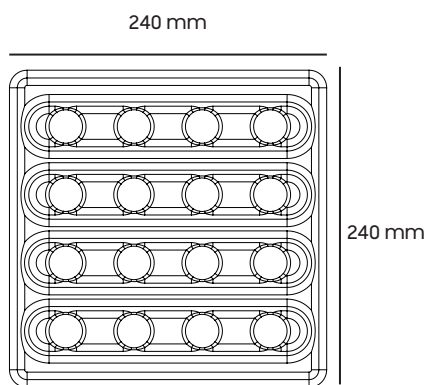


Effect 9S

Recessed



Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0



Light Distribution






Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 9S	on-off/DALI	16W	2850LM	90	220V-240V AC




Effect 28C Tunable



Recessed

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 28C Tunable	on-off/DALI	48W	8880LM	90	220V-240V AC

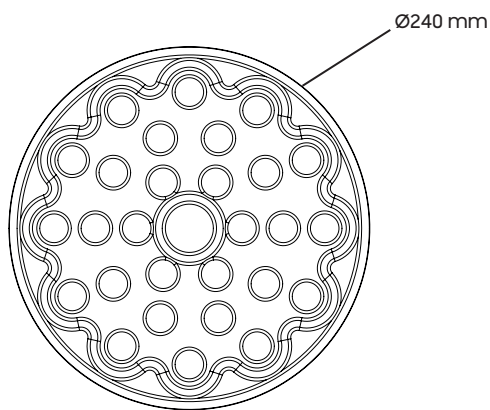

Effect 28C Color

Recessed



Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0



Light Distribution



Body Color




Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 28C Color	on-off/DALI	48W	8880LM	90	220V-240V AC

Ø240 mm

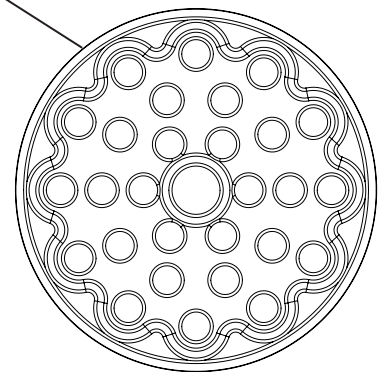

60 mm



Ø220mm




Effect 28C



Recessed

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

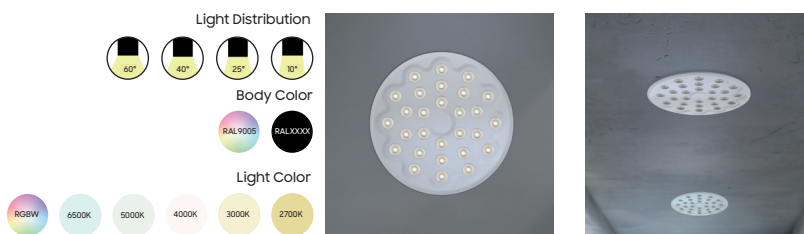

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 28C	on-off/DALI	48W	8880LM	90	220V-240V AC

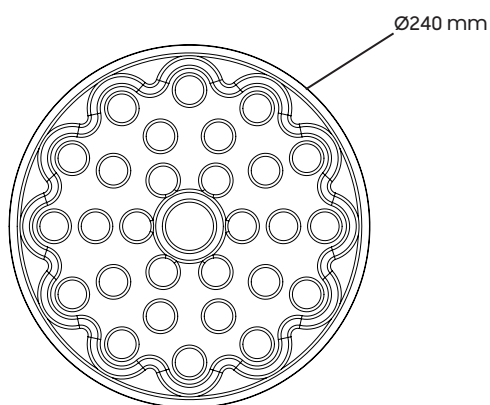

Effect 16C

Recessed



Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0



Light Distribution



Body Color




Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 16C	on-off/DALI	28W	5075LM	90	220V-240V AC

Ø180 mm



60 mm



Ø160mm




Effect 6C



Recessed

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

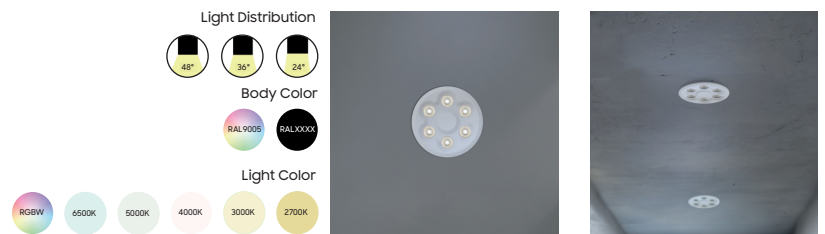


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 6C	on-off/DALI	10W	1900LM	90	220V-240V AC





Blade 24C

Recessed

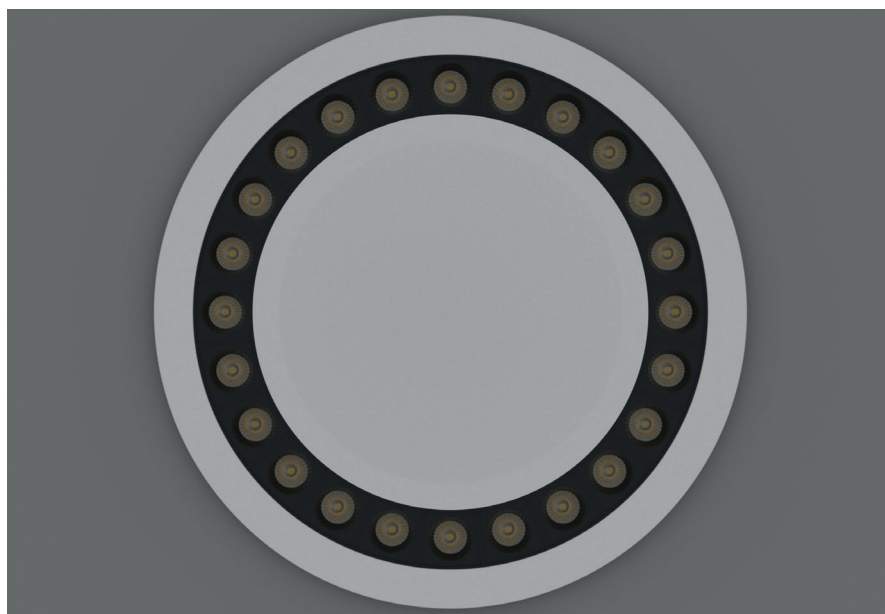

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0



Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 24C	on-off/DALI	42W	7610LM	90	220V-240V AC

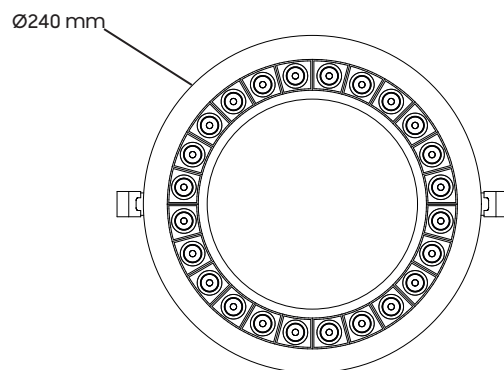

65 mm



Ø230mm





Blade 12C




Recessed

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

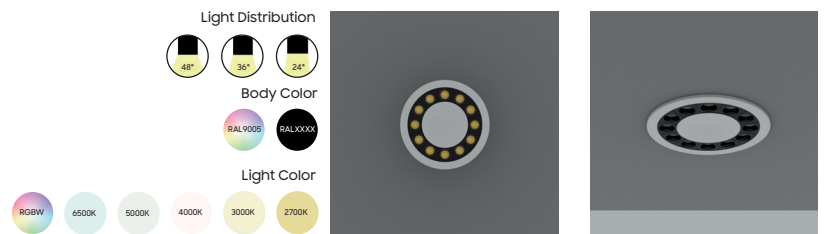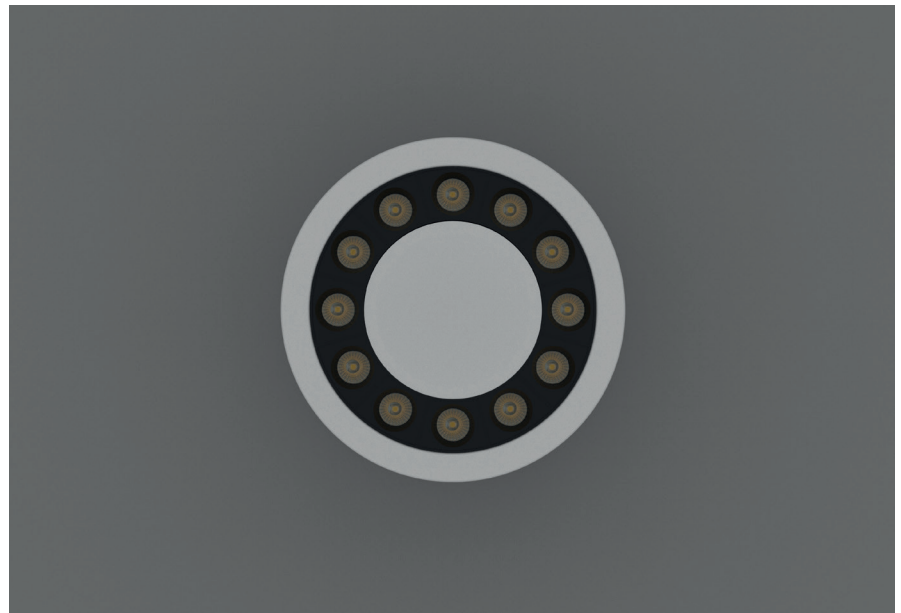


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 12C	on-off/DALI	21W	3805LM	90	220V-240V AC

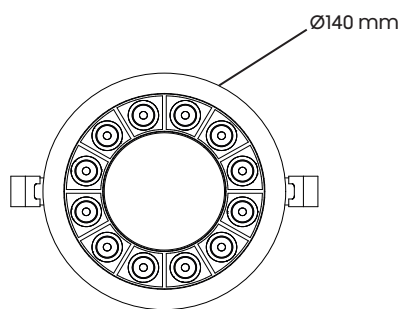



Blade 6C

Recessed

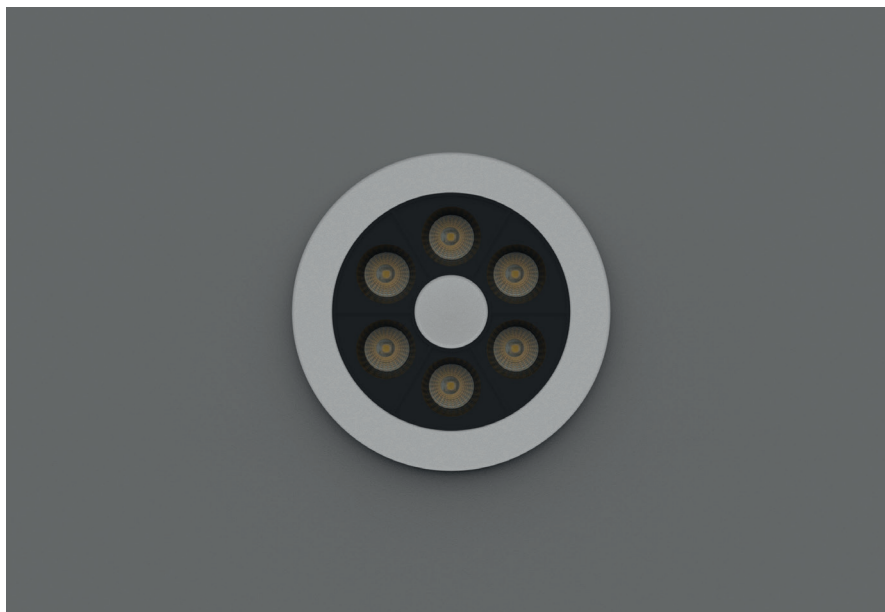

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0



Light Distribution



Body Color




Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 6C	on-off/DALI	10W	1900LM	90	220V-240V AC

Ø95 mm



65 mm




Ø85mm



IMAGE
Recessed



Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 28X Tunable	on-off/DALI	48W	8880LM	90	220V-240V AC

340



Blade 25X

Recessed

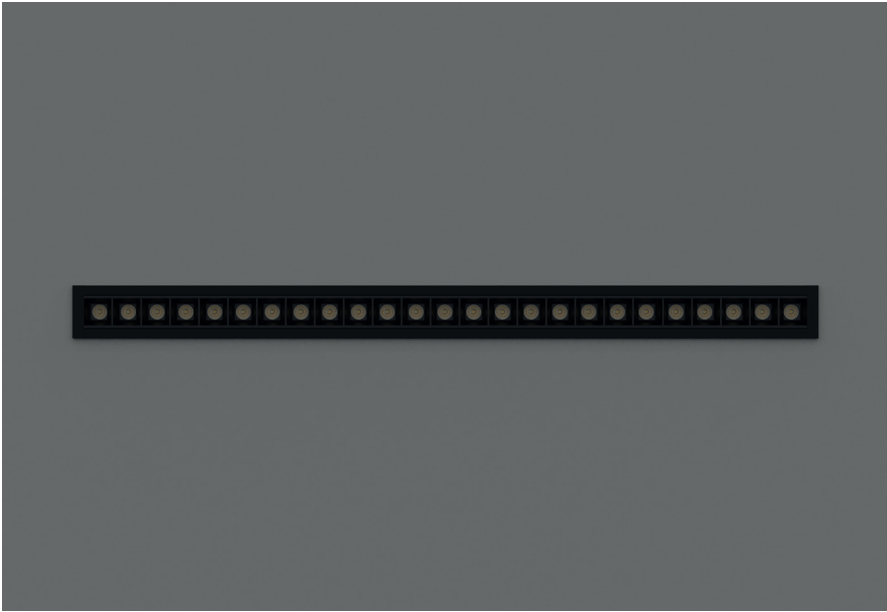

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

Light Distribution

24° 36° 48°



Body Color

RAL 9005 RAL 9005

Light Color


2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 25X	on-off/DALI	45W	8325LM	90	220V-240V AC

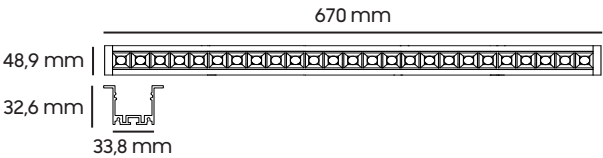

Blade 20X

Recessed

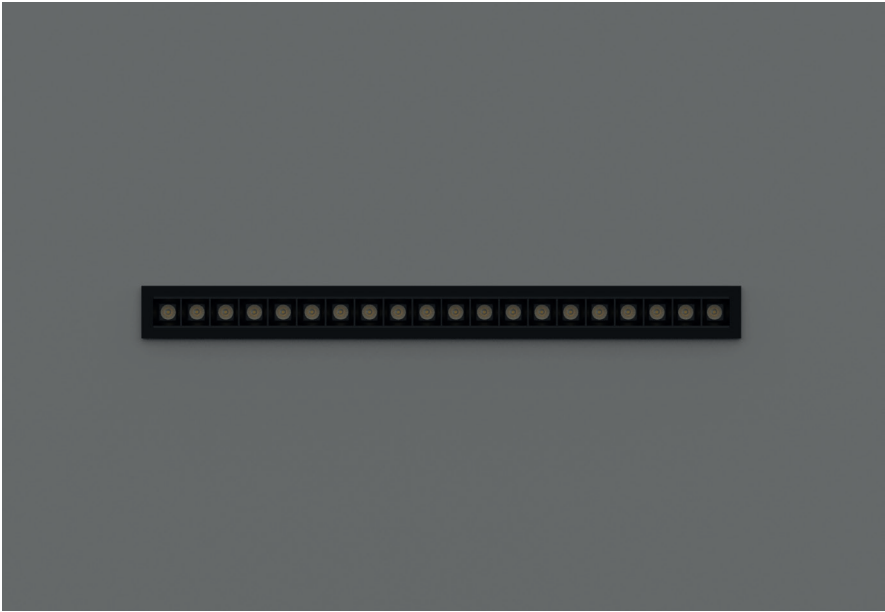

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

48°

36°

24°

Light Distribution

RAL 9005

RAL XXXX

Body Color

RGBW

6500K

5000K



4000K

3000K

2700K


Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 20X	on-off/DALI	36W	6660LM	90	220V-240V AC

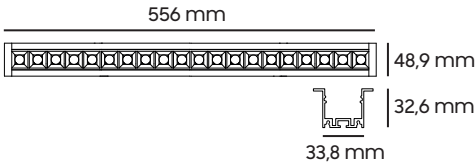

Blade 15X

Recessed

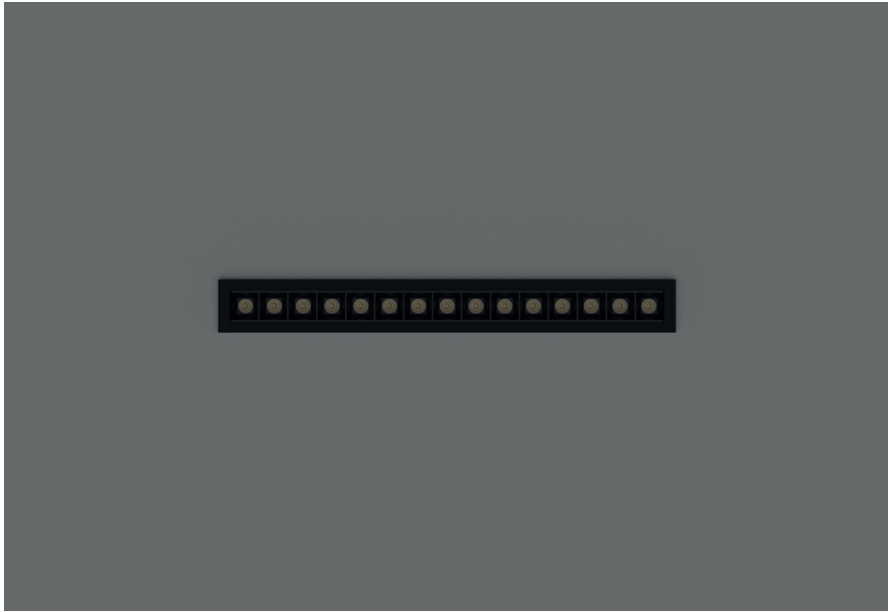

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

Light Distribution

24° 36° 48°



Body Color

RAL 9005 RAL 9005

Light Color


2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 15X	on-off/DALI	27W	4995LM	90	220V-240V AC

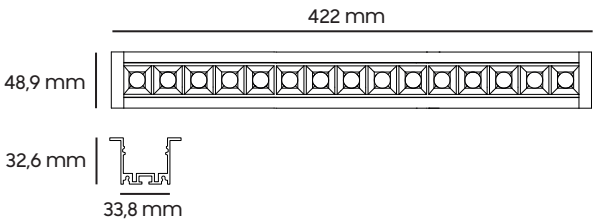

Blade 10X

Recessed

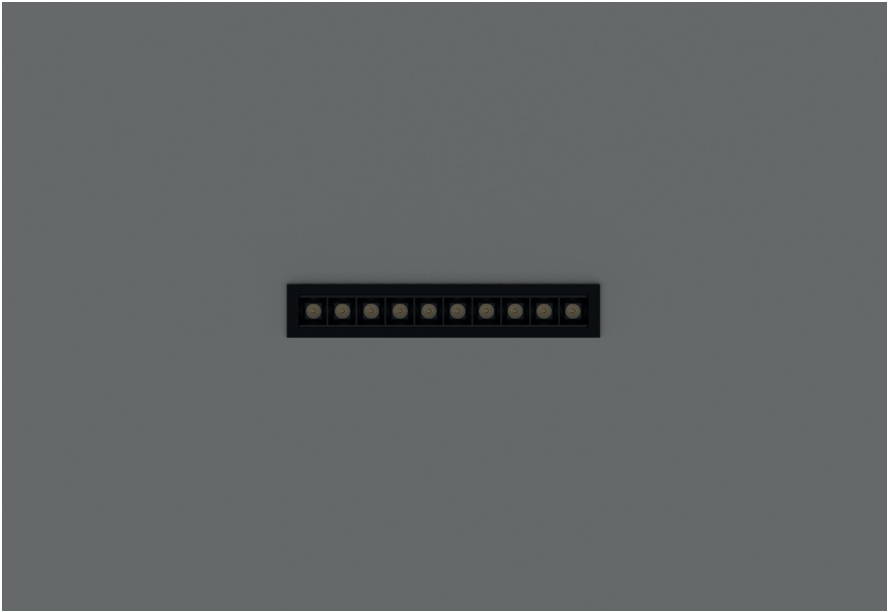

Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

Light Distribution

48° 36° 24°



Body Color

RAL 9005 RAL 9006

Light Color


RGBW 6500K 5000K 4000K 3000K 2700K

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 10X	on-off/DALI	18W	3330LM	90	220V-240V AC

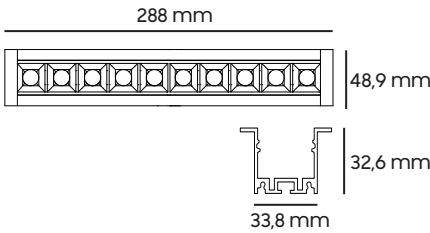

Blade 5X

Recessed

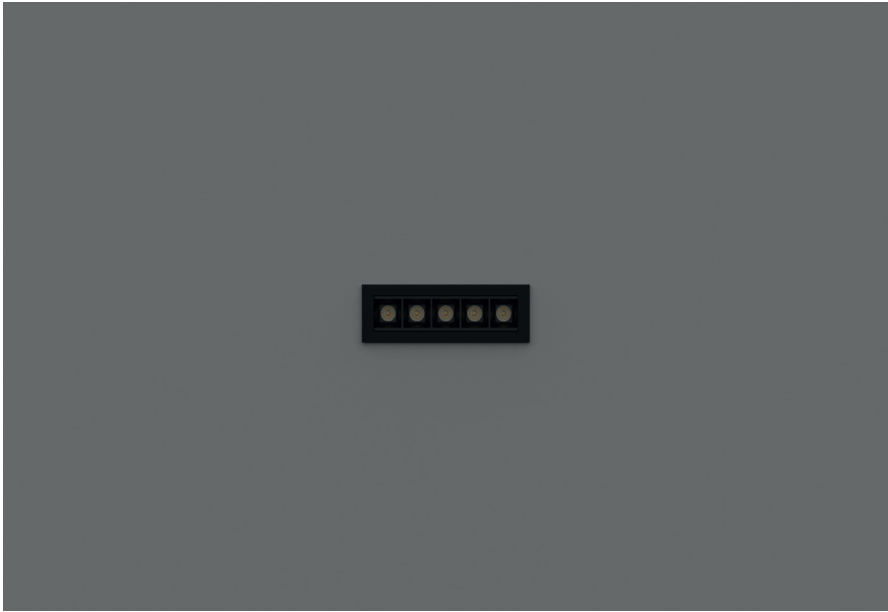

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

Light Distribution

24° 36° 48°



Body Color

RAL 9005 RAL 9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 5X	on-off/DALI	9W	1665LM	90	220V-240V AC




Blade 24SM

Surface

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

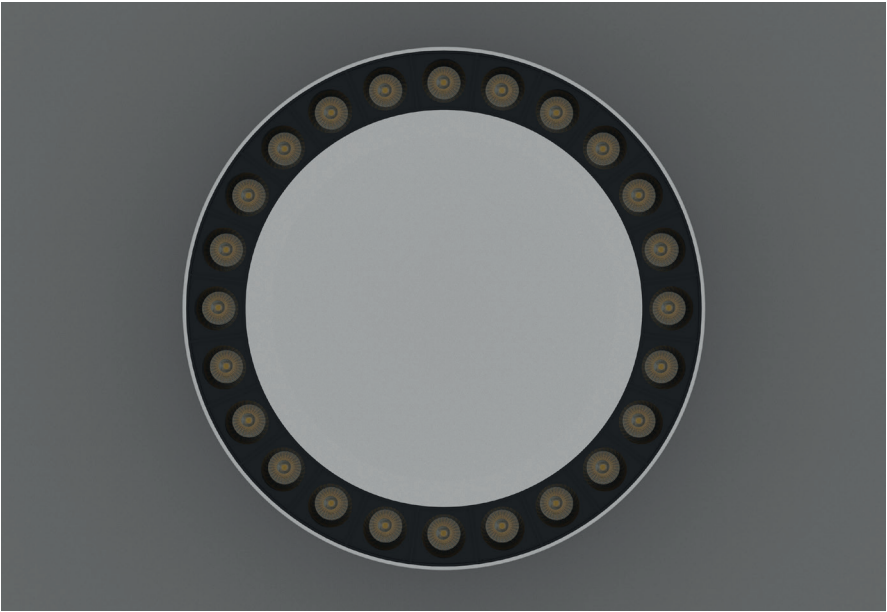


Light Distribution

Body Color


Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 24SM	on-off/DALI	42W	7610LM	90	220V-240V AC

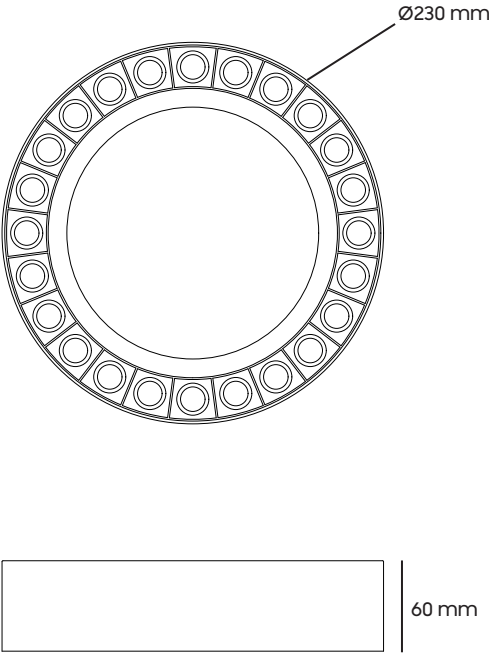



Blade 12SM

Surface

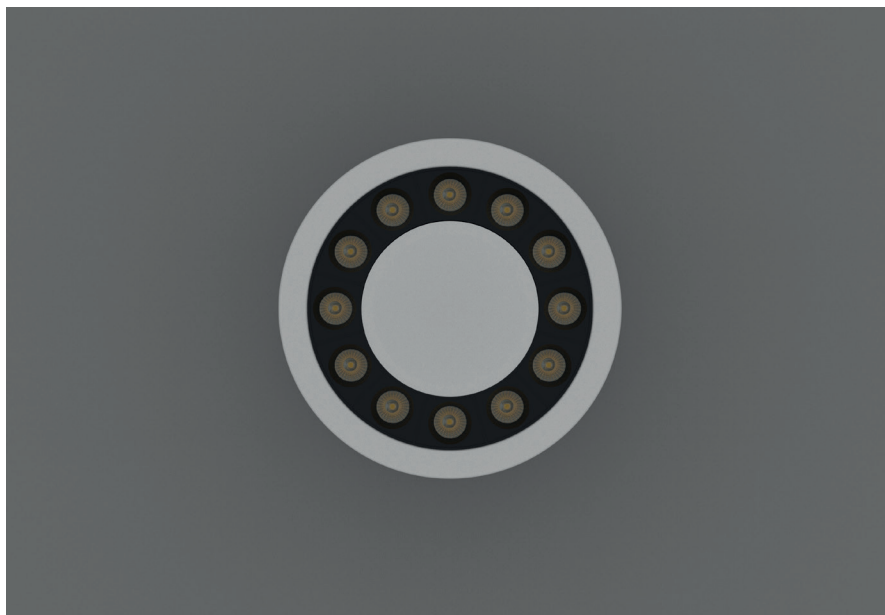

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0



Light Distribution



Body Color




Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 12SM	on-off/DALI	21W	3805LM	90	220V-240V AC

Ø140 mm



100 mm





Blade 6SM


Surface

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

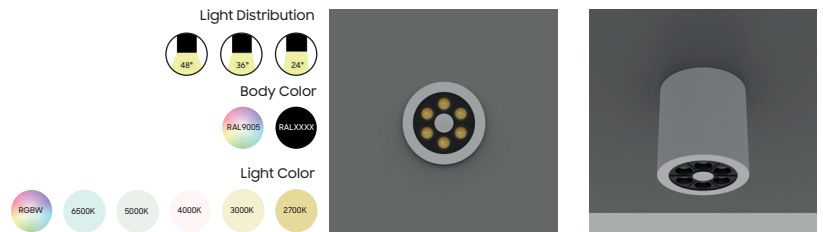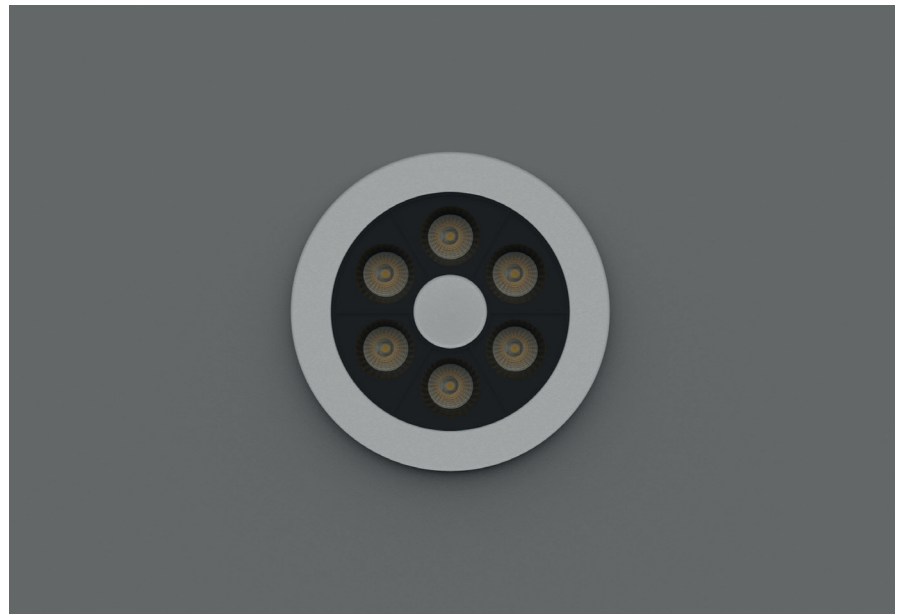


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 6SM	on-off/DALI	10W	1900LM	90	220V-240V AC

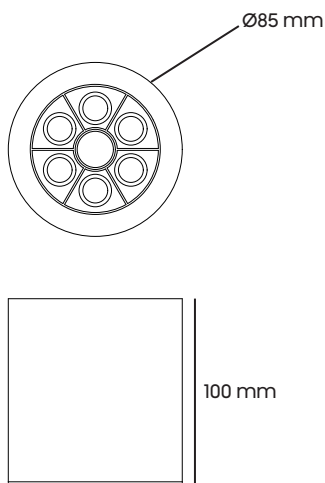


Blade 25X SM

Surface

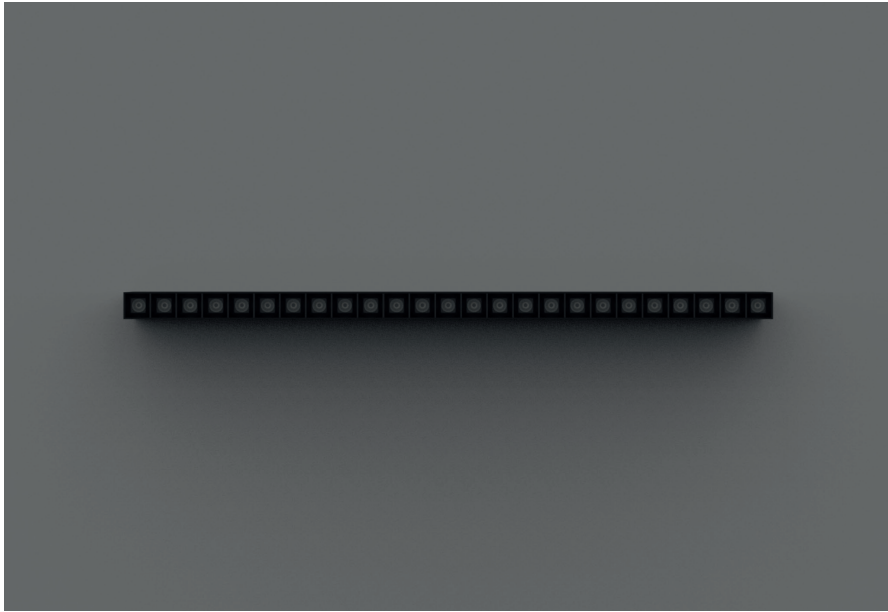

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0



Light Distribution

24° 36° 48°



Body Color

RAL 9005 RAL 9005

Light Color


2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 25X SM	on-off/DALI	45W	8325LM	90	220V-240V AC



Blade 20X SM

Surface

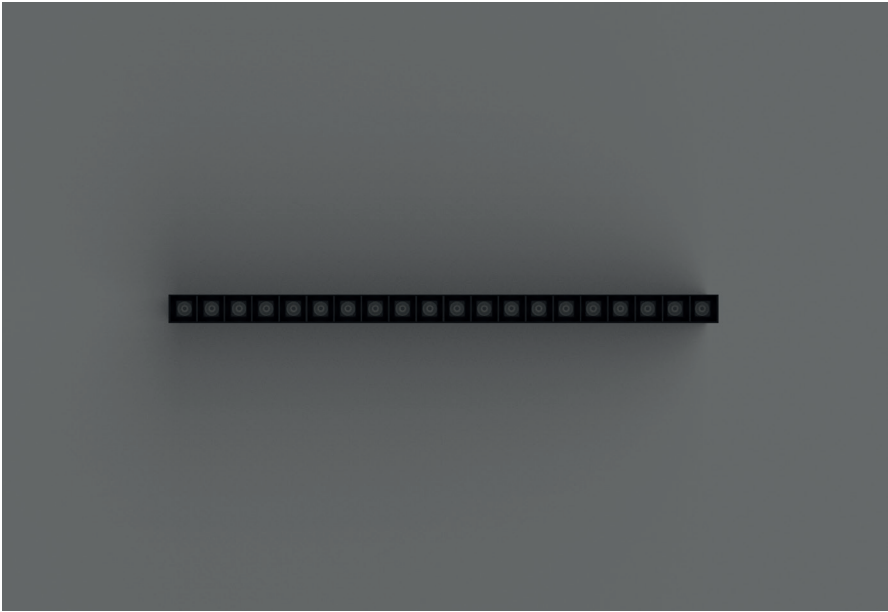

Quick info



Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

Light Distribution

Body Color


Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 20X SM	on-off/DALI	36W	6660LM	90	220V-240V AC



Blade 15X SM

Surface

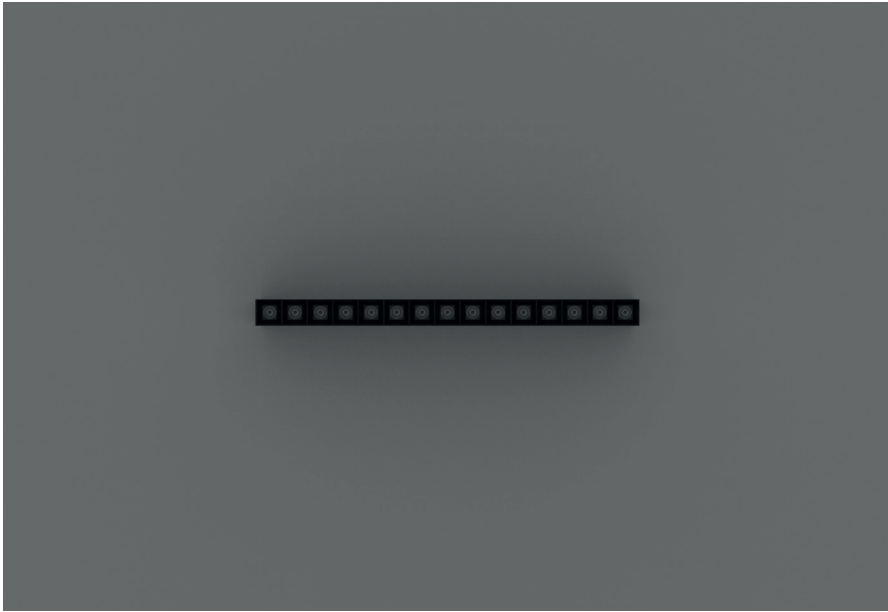

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

Light Distribution

24° 36° 48°


Body Color

RAL 9005 RAL 9005

Light Color


2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 15X SM	on-off/DALI	27W	4995LM	90	220V-240V AC

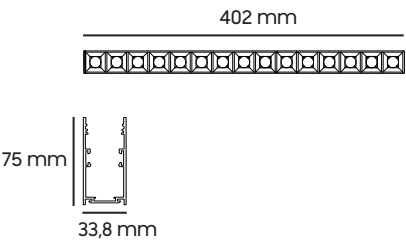

Blade 10X SM

Surface

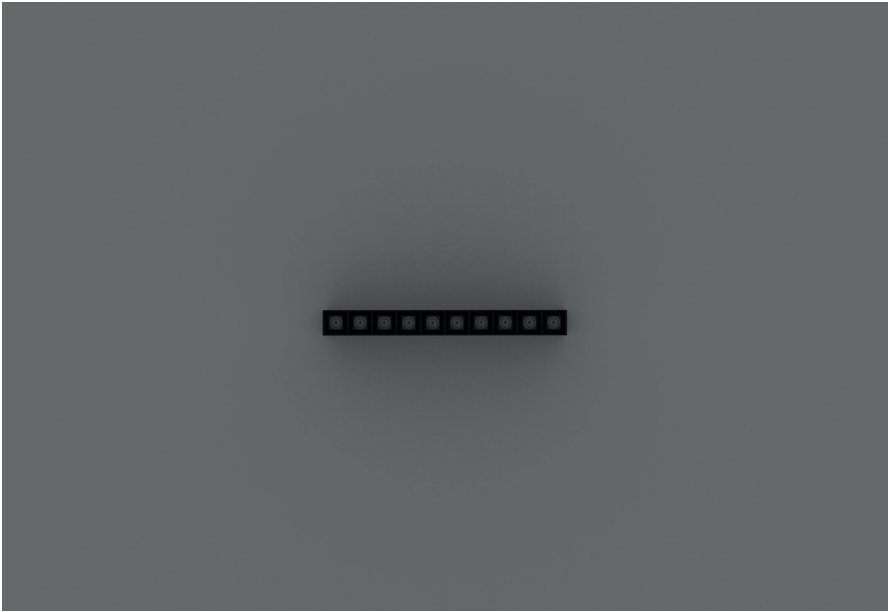

Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

Light Distribution

48° 36° 24°


Body Color

RAL 9005 RAL XXXX

Light Color


RGBW 6500K 5000K 4000K 3000K 2700K

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 10X SM	on-off/DALI	18W	3330LM	90	220V-240V AC





Blade 5X SM

Surface

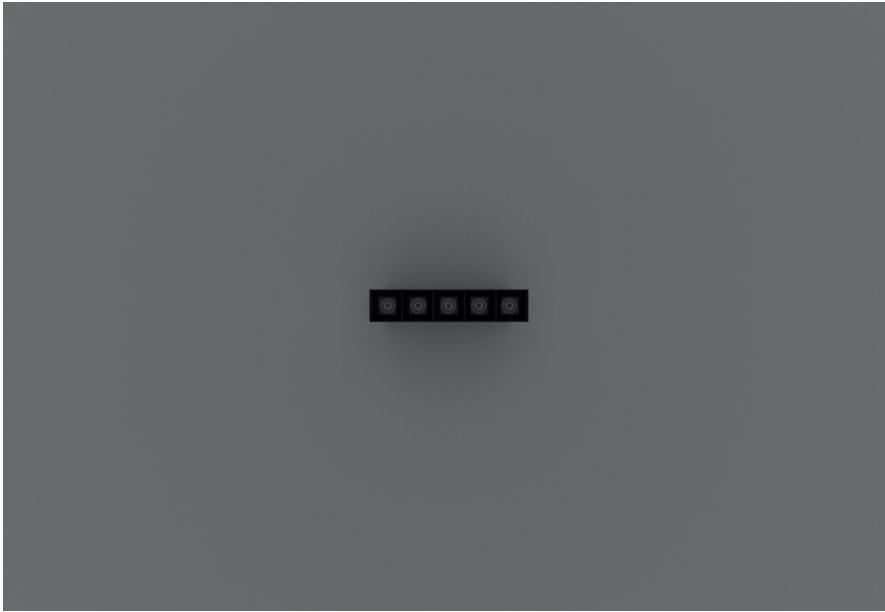

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0



Light Distribution

24° 36° 48°


Body Color

RAL 9005 RAL 9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 5X SM	on-off/DALI	9W	1665LM	90	220V-240V AC




Footed 3X

Footed

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

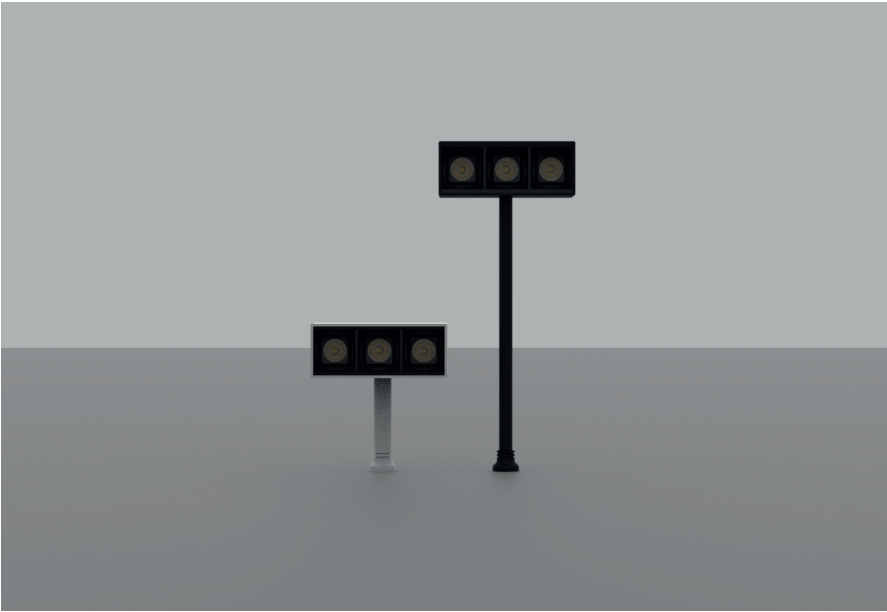


Light Distribution

Body Color


Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Footed 3X	on-off/DALI	5W	950LM	90	220V-240V AC


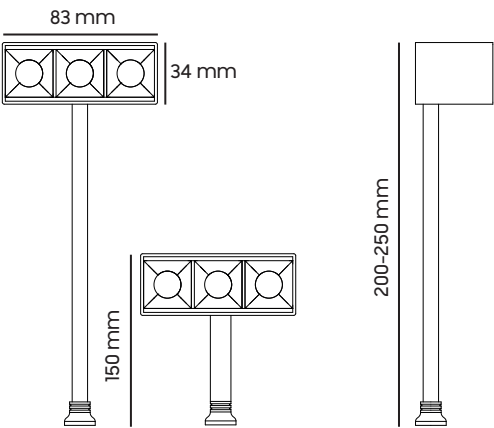


Footed 1X

Footed

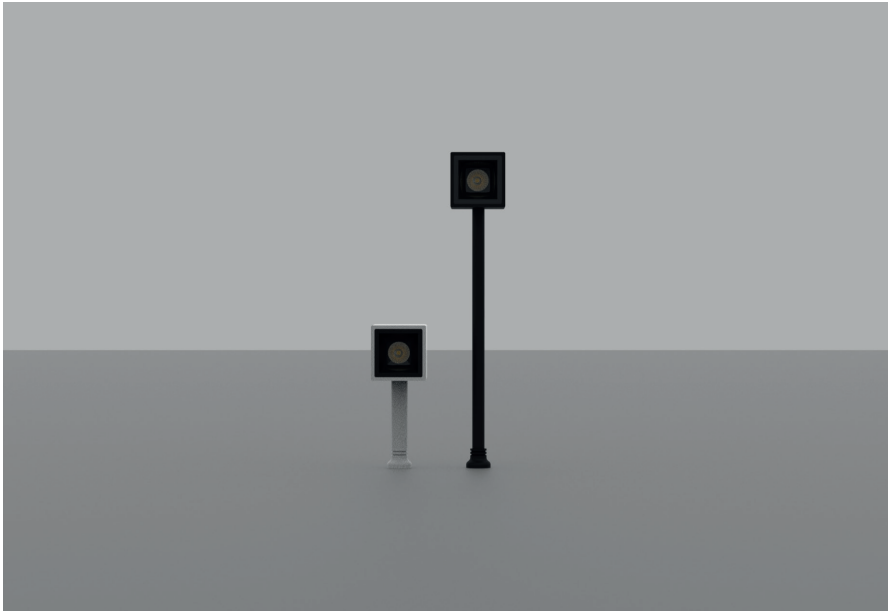

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0



Light Distribution

24° 36° 48°


Body Color

RAL 9005 RAL 9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Footed 1X	on-off/DALI	2W	370LM	90	220V-240V AC


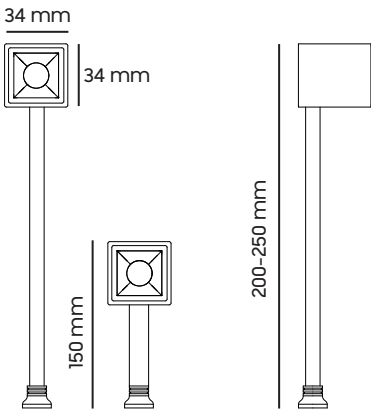


Footed 1S


Footed

Quick info


Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

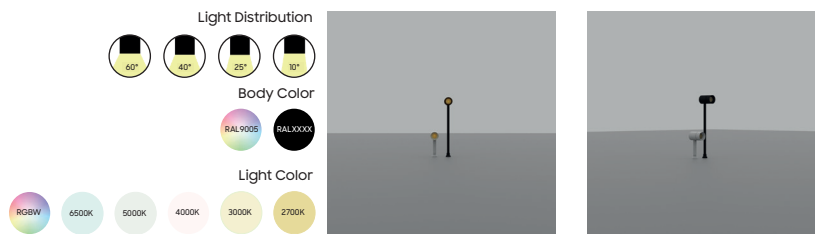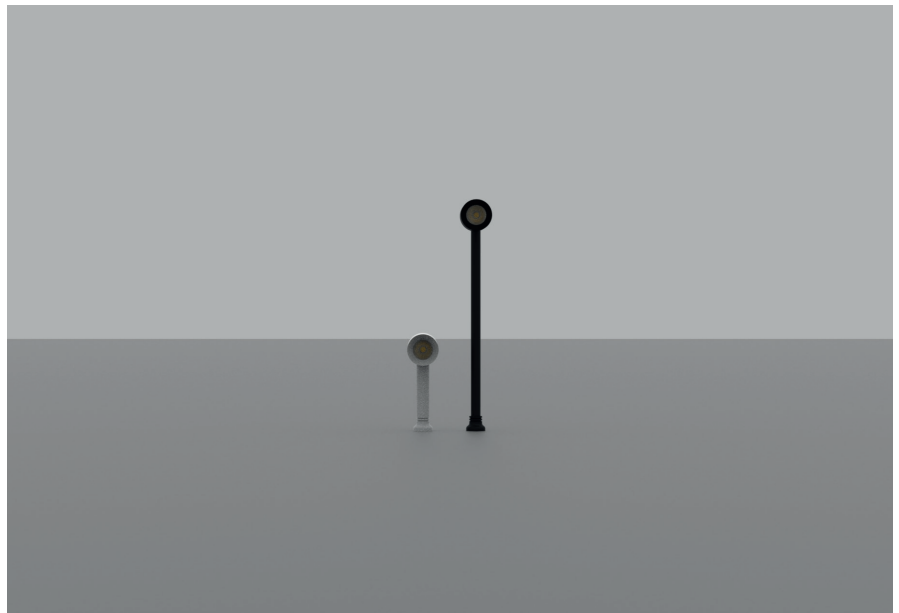

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Footed 1S	on-off/DALI	2W	370LM	90	220V-240V AC

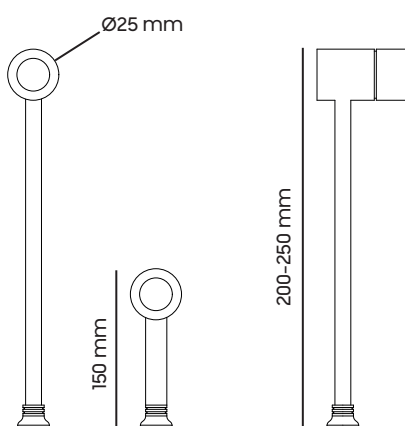

Line
Footed

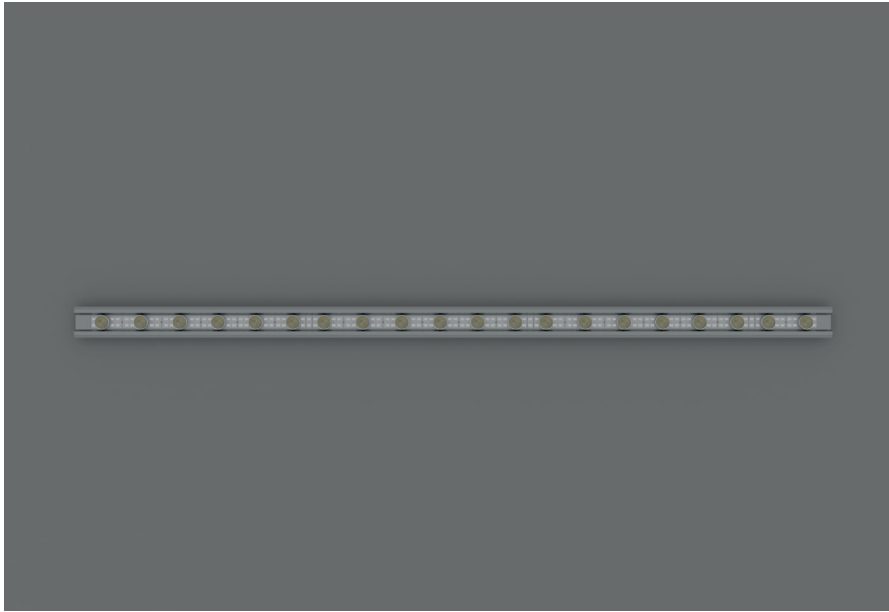

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

Light Distribution

10° 25° 40° 60°


Body Color

RAL9005 RAL9005

Light Color


2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Line	on-off/DALI	M/35	M/6000	90	220V-240V AC



Line Pipe

Footed

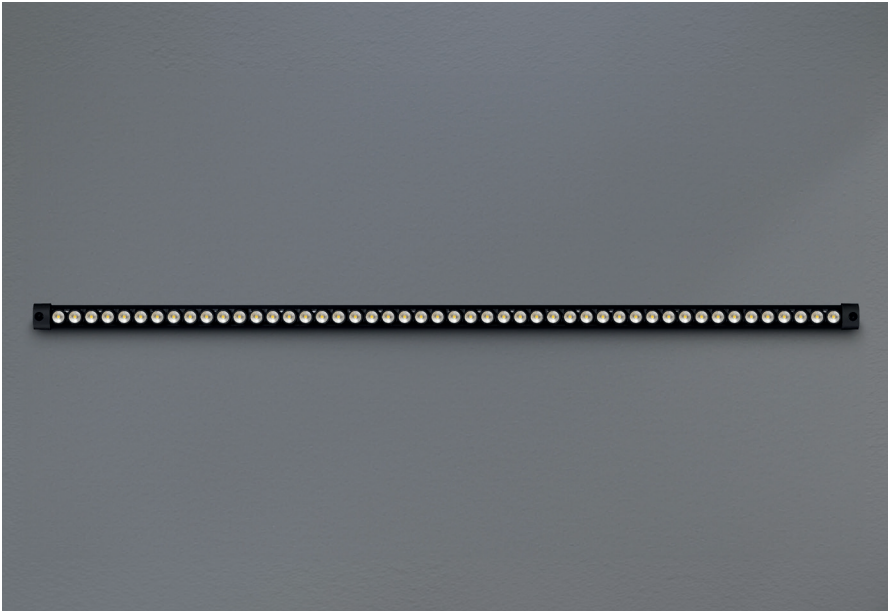

Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

Light Distribution

48° 36° 24°



Body Color

RAL 9005 RAL 9006

Light Color



RGBW 6500K 5000K 4000K 3000K 2700K

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Line Pipe	on-off/DALI	M/30	9000LM	90	220V-240V AC





MAGNET


LENS

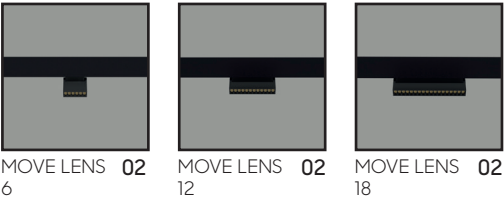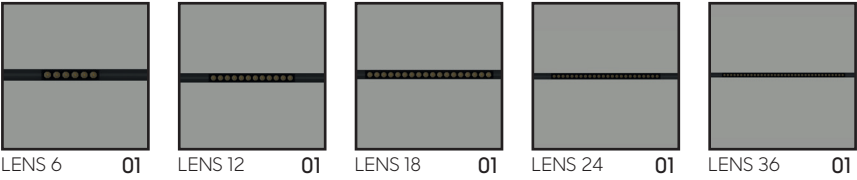


HONEY

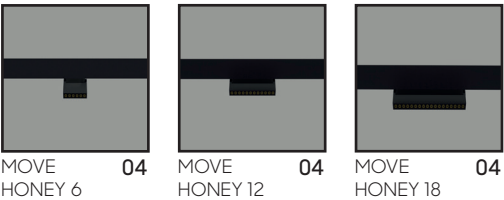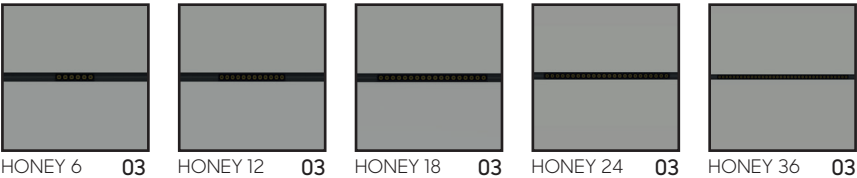


DIFFUSER

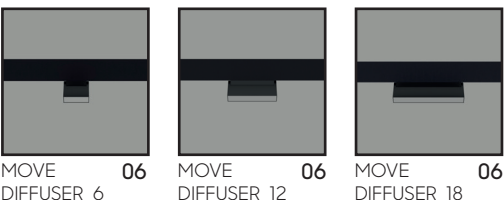

ASYMMETRIC

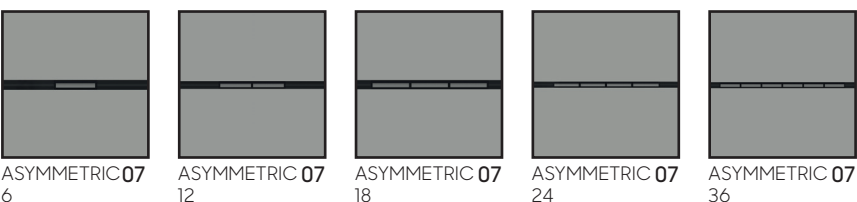

TRACK

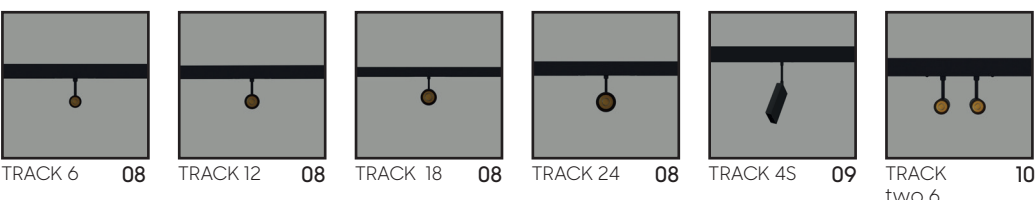

PENDANT



TRACK
PROFILE



RECESSED
PROFILE 13



SURFACE
PROFILE 13



TRIMLESS
PROFILE 13



RECESSED
CORNER TURN 13



SURFACE
CORNER TURN 13



TRIMLESS
CORNER TURN 13



RECESSED
VERTICAL
CORNER 13




SURFACE
VERTICAL
CORNER 13




TRIMLESS
VERTICAL
CORNER 13



RECESSED
COVER 13



SURFACE
MOUNTED
COVER 13



TRIMLESS
COVER 13



ENERGY
INTRODUCTION 14



INTER
CONNECTOR 14



T
CONNECTION 14



CORNER
CONNECTION 14



HANGER 14



JOINT PART 14



SPRING 01 14




SPRING 02 14



SIDE COVER 14

Lens

Lens

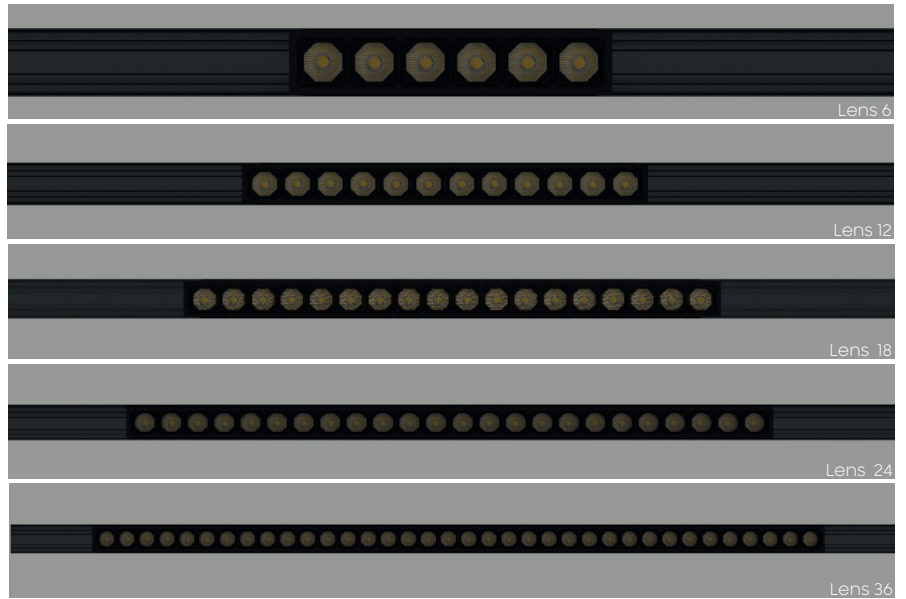

Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Lens 6	on-off/DALI	6W	600LM	90	48V	112 x 25 x 22mm
Lens 12	on-off/DALI	12W	1200LM	90	48V	219 x 25 x 22mm
Lens 18	on-off/DALI	18W	1800LM	90	48V	326 x 25 x 22mm
Lens 24	on-off/DALI	24W	2400LM	90	48V	438 x 25 x 22mm
Lens 36	on-off/DALI	36W	3600LM	90	48V	655 x 25 x 22mm

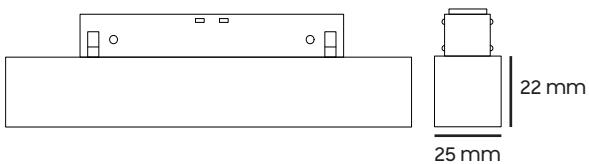

Move Lens

Lens

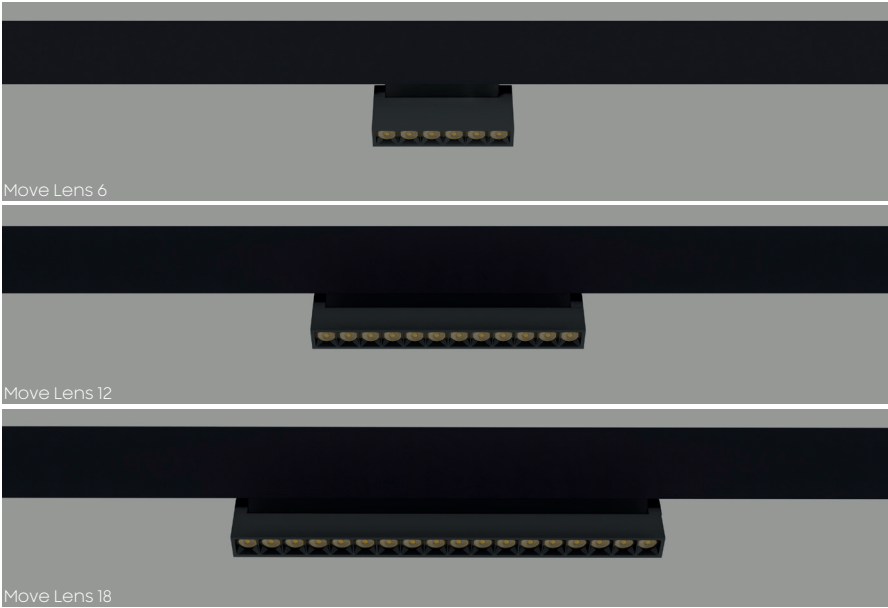

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

Light Distribution





Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Move Lens 6	on-off/DALI	6W	600LM	90	48V	111.5 x 25 x 100mm
Move Lens 12	on-off/DALI	12W	1200LM	90	48V	219 x 25 x 100mm
Move Lens 18	on-off/DALI	18W	1800LM	90	48V	328 x 25 x 100mm



HoneyComb

Honey

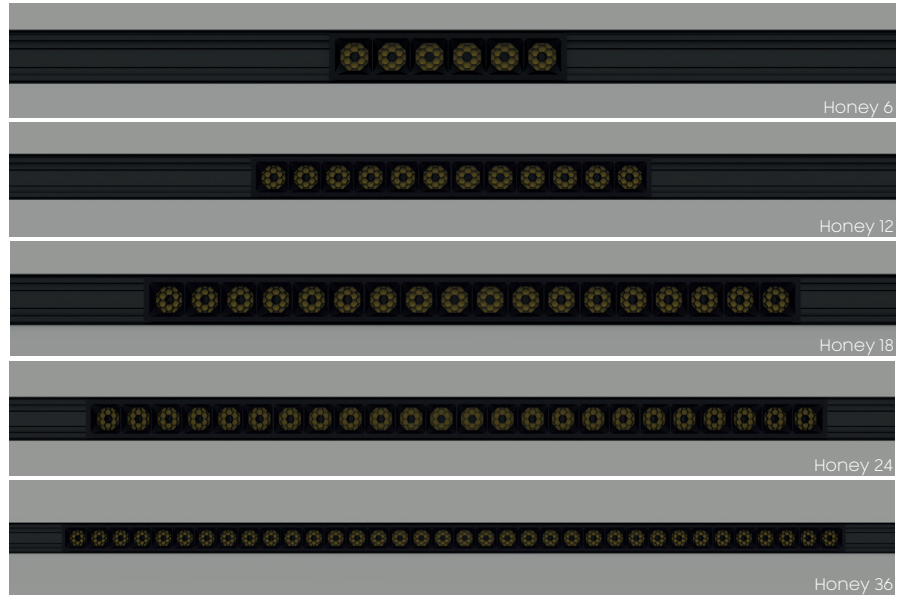

Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Honey 6	on-off/DALI	6W	600LM	90	48V	112 x 25 x 22mm
Honey 12	on-off/DALI	12W	1200LM	90	48V	219 x 25 x 22mm
Honey 18	on-off/DALI	18W	1800LM	90	48V	326 x 25 x 22mm
Honey 24	on-off/DALI	24W	2400LM	90	48V	438 x 25 x 22mm
Honey 36	on-off/DALI	36W	3600LM	90	48V	655 x 25 x 22mm

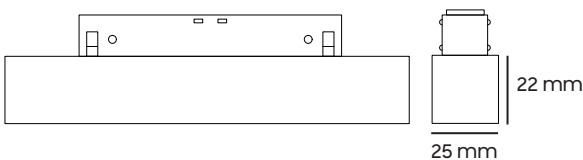

Move Honey

Honey

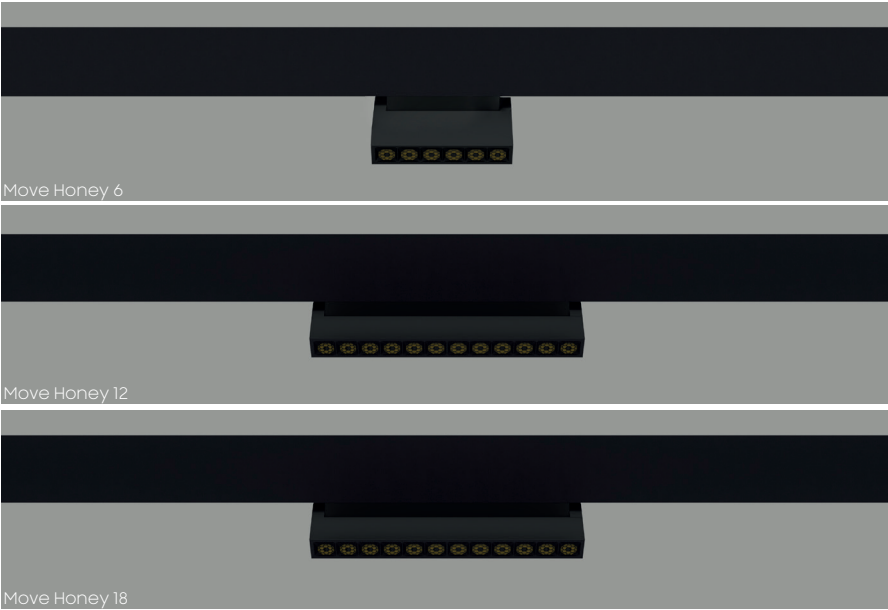

Quick info
 Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0

Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Move Honey 6	on-off/DALI	6W	600LM	90	48V	111.5 x 25 x 100mm
Move Honey 12	on-off/DALI	12W	1200LM	90	48V	219 x 25 x 100mm
Move Honey 18	on-off/DALI	18W	1800LM	90	48V	328 x 25 x 100mm



Diffuser

Diffuser



Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Diffuser 6	on-off/DALI	6W	600LM	90	48V	112 x 25 x 22mm
Diffuser 12	on-off/DALI	12W	1200LM	90	48V	219 x 25 x 22mm
Diffuser 18	on-off/DALI	18W	1800LM	90	48V	326 x 25 x 22mm
Diffuser 24	on-off/DALI	24W	2400LM	90	48V	438 x 25 x 22mm
Diffuser 36	on-off/DALI	36W	3600LM	90	48V	655 x 25 x 22mm



MOVE DIFFUSER

Diffuser




Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

Light Distribution

Body Color

Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Move Diffuser 6	on-off/DALI	6W	600LM	90	48V	111.5 x 25 x 100mm
Move Diffuser 12	on-off/DALI	12W	1200LM	90	48V	219 x 25 x 100mm
Move Diffuser 18	on-off/DALI	18W	1800LM	90	48V	328 x 25 x 100mm

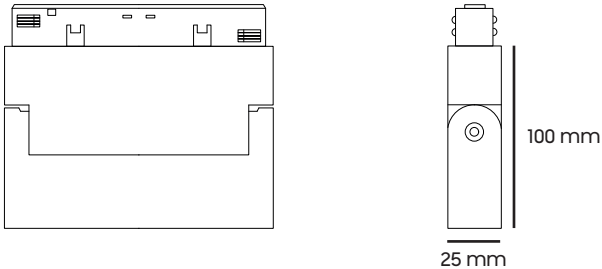

ASYMMETRIC

Asymmetric



Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Asymmetric 6	on-off/DALI	6W	600LM	90	48V	112 x 25 x 22mm
Asymmetric 12	on-off/DALI	12W	1200LM	90	48V	219 x 25 x 22mm
Asymmetric 18	on-off/DALI	18W	1800LM	90	48V	326 x 25 x 22mm
Asymmetric 24	on-off/DALI	24W	2400LM	90	48V	438 x 25 x 22mm
Asymmetric 36	on-off/DALI	36W	3600LM	90	48V	655 x 25 x 22mm



TRACK

Track

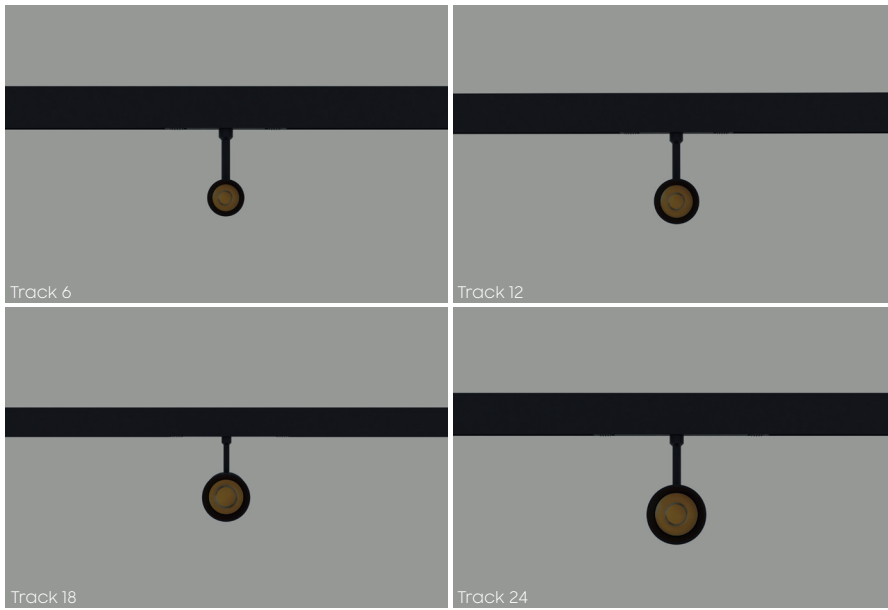

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0

Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Track 6	on-off/DALI	6W	600LM	90	48V	Ø35 x H: 80mm
Track 12	on-off/DALI	12W	1200LM	90	48V	Ø45 x H: 100mm
Track 18	on-off/DALI	18W	1800LM	90	48V	Ø55 x H: 120mm
Track 24	on-off/DALI	24W	2400LM	90	48V	Ø65 x H: 140mm

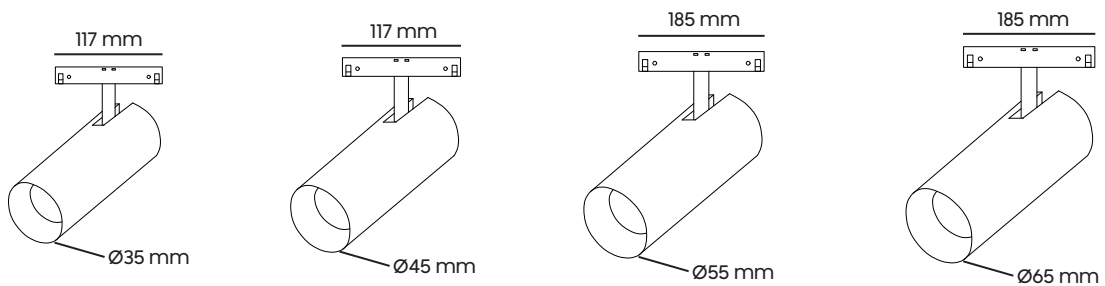


TRACK 4S

Track

Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

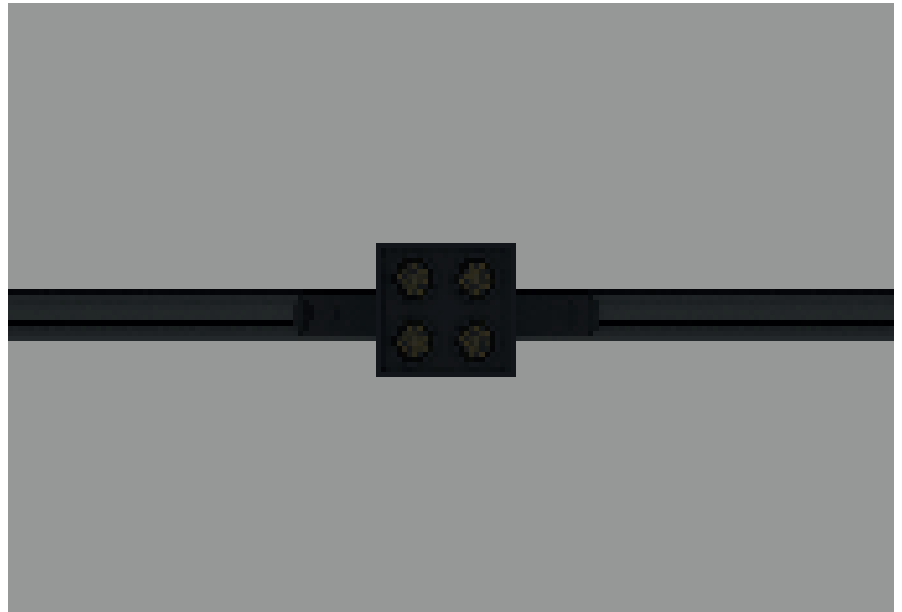


Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Track 4S	on-off/DALI	4W	400LM	90	48V	44 x 44 x 105mm

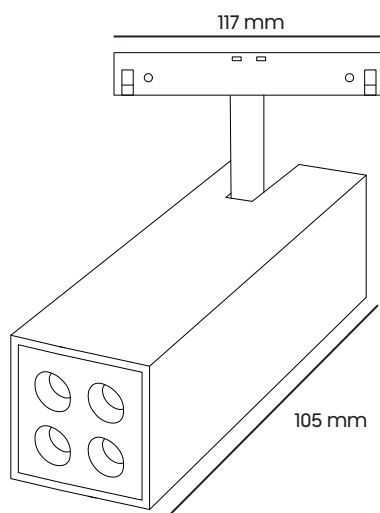

Track two 6

Track

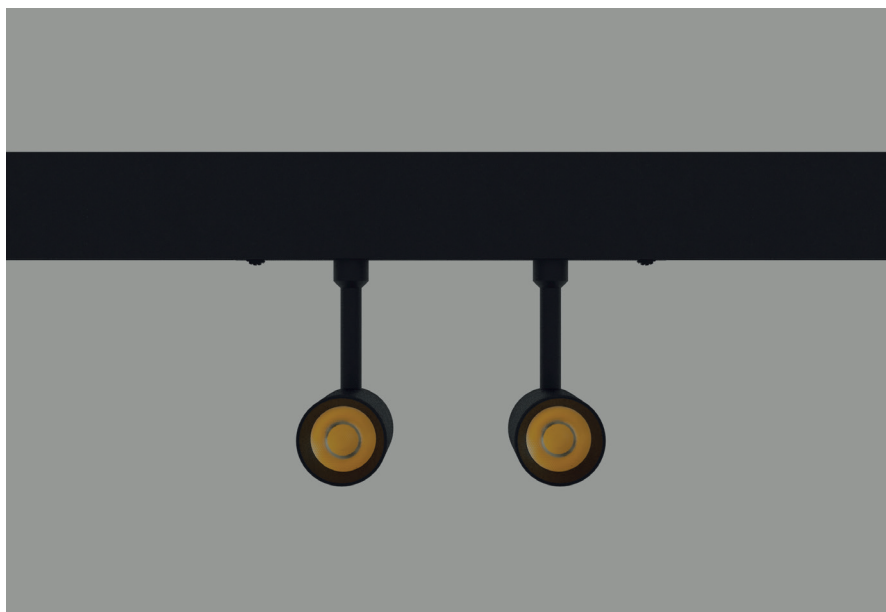

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0



Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Track two 6	on-off/DALI	12W	1200LM	90	48V	Ø35 x H: 80mm

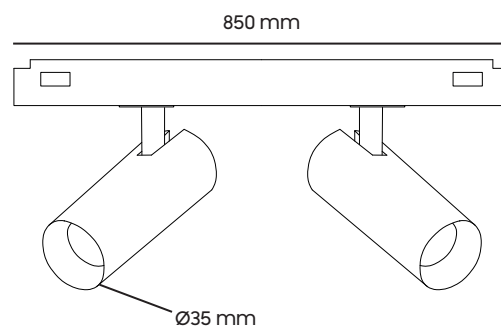

ZOOM

Track

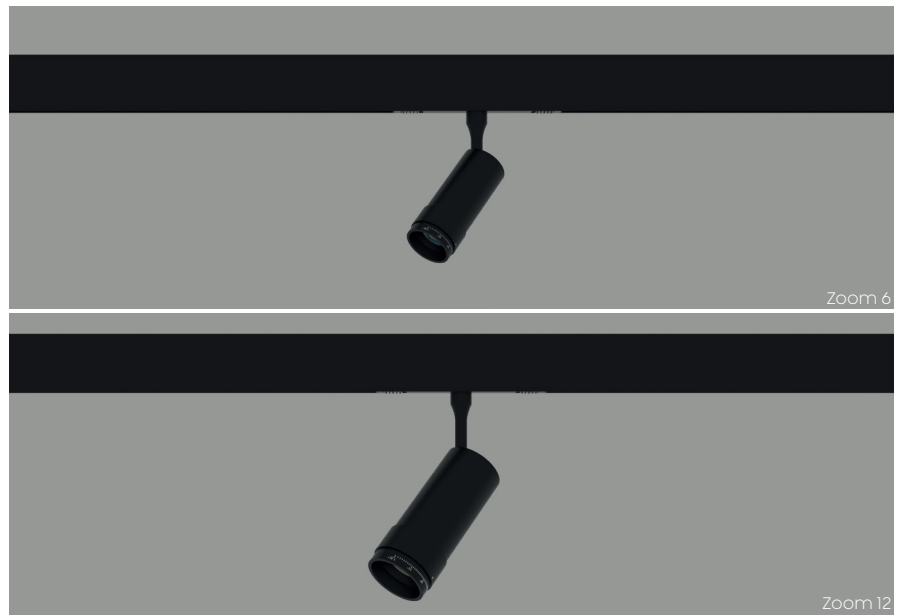

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0

Light Distribution





Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Zoom 6	on-off/DALI	6W	600LM	90	48V	Ø35 x H: 86mm
Zoom 12	on-off/DALI	12W	1200LM	90	48V	Ø45 x H: 195mm



PENDANT

Pendant

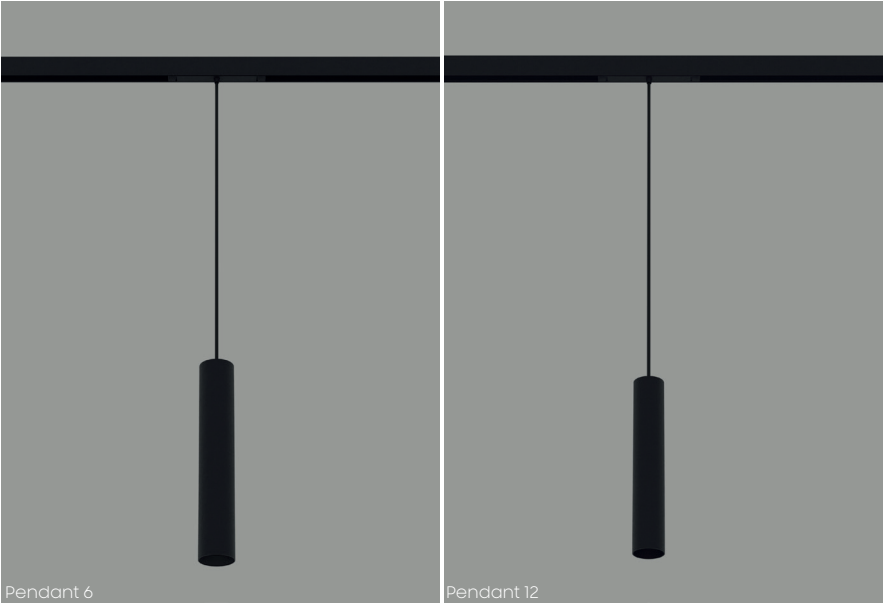

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

Light Distribution




Body Color




Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Pendant 6	on-off/DALI	6W	600LM	90	48V	Ø30 x H:350mm
Pendant 12	on-off/DALI	12W	1200LM	90	48V	Ø52 x H:300mm

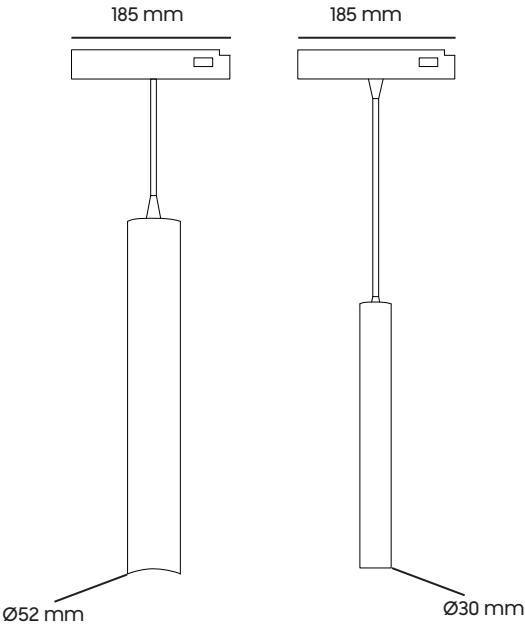


Track Profiles



Surface Mounted
Profile



Recessed Profile  30mm

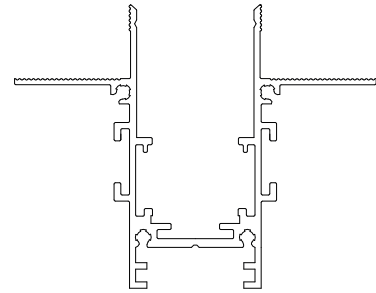

Trimless Profile  40mm

Connector



Recessed Corner Turn



Surface Corner Turn



Trimless Corner Turn



Recessed Vertical
Corner



Surface Vertical
Corner



Trimless Vertical
Corner



Surface Mounted
Cover



Recessed Cover



Trimless Cover

Connector



Energy Introduction



Interconnector



T connection



Corner Connection



Hanger




Joint Part




Spring




Spring




TINY S 01




TINY C 02



MIDY S 03




MIDY C 04




MIDY SM 05




LODY S 06




LODY C1 07




LODY C2 08




RONDO 09




CE-XTD-R01 11



CE-XTD-S01 12



CE-XTD-R04 13



CE-XTD-S04 14



CE-XTD-S03 15



CE-XTD-S06 16



CE-XTD-S12 17



CE-GSD-S03 18



CE-GSD-S06 19



CE-GSD-S12 20



CE-GSD-S06-2 21



CE-GSD-S12-2 22



CE-R1-R-01 23



CE-R1-R-02 24



CE-R1-S-01 25



CE-R1-S-02 26



CE-R1-S-03 27



CE-R01-LS-A 28




CE-C48-R-01 29



CE-WX-R04-A 30



CE-LM-R03-SD 31



NMW-WX-100 32



NMW-WX-170 33



CE-C48-S-01 34



CE-C48-S-02 35



CE-C48-S-03 36



CE-R4-R-01 37




CE-R4-S-01 38




CE-R4-S-02 39




CE-R4-S-03 40



AW-XTD-10-01 41



AW-XTD-10-03 42




AW-XTD-10-06 43



MZ-R-A 44



MZ-S-A 44



MZ-WW 44



MZ-C 44



MZ-R-Z 44



MZ-S-Z 44



MZ-R-X 44




MZ-S-X 44



MZ-A 44



MZ-F-01 45




MZ-F-02 45




MZ-F-03 45




MZ-F-04 45




TD-069-55 46



TD-069-65 47




TD-069-75 48




TD-069-95 49




TD-068-55 50




TD-068-70 51




NMW-TD-50 52



NMW-TD-60 53




NMW-TD-75 54




NMW-TD-90 55



NMW-TD-110 56



NMW-GSD-R75 57




NMW-GSD-R90 58




NMW-GSD-R105 59




NMW-GSD-R120 60




NMW-GSD-S75 61




NMW-GSD-S90 62




NMW-GSD-S105 63




NMW-GSD-S120 64




NMW-GSD-S75-2 65



NMW-GSD-S90-2 66




NMW-GSD-S105-2 67




NMW-GSD-S120-2 68


RECESSED




AW-XTD-A-01 69




AW-XTD-A-02 70




AW-XTD-A-03 71




AW-XTD-A-05 72




AW-XTD-A-10 73



AW-XTD-A-15 74



AW-XTD-A-04 75



AW-XTD-A-09 76




AW-XTD-WW-05 77




AW-XTD-WW-10 78




AW-XTD-WW-15 79




AW-XTD-70-01 80




AW-XTD-70-02 81




AW-XTD-70-03 82



TSD-009-25 83



TSD-009-35 84



TSD-009-50 85




TSD-009-60 86



TSD-009-70 87


SEMI-FLUSH




AW-TD055-2.5F 88




AW-TD055-3F 89



AW-TD055-3.5F 90



AW-TD055-4F 91




AW-TD055-5F 92




AW-TD055-6F 93




AW-TD055-8F 94




NMW-O55 95



NMW-O75 96



NMW-R55 97



NMW-R75 98



NMW-S55 99



NMW-S75 100

SURFACE



CE-R1-M-01 101



CE-R1-M-02 102



CE-R1-M-03 103



CE-C48-M-01 104



CE-C48-M-02 105



CE-C48-M-03 106



CE-R4-M-01 107



CE-R4-M-02 108



CE-R4-M-03 109

SURFACE



CE-S4-M-01 110



CE-S4-M-02 111



CE-S4-M-03 112



CE-LM-S04 114



CE-LM-R04 115



AWW-MD006-4 116



AWW-MD006-9 117



AWW-XTD-3470-05 118



AWW-XTD-3470-10 119




AWW-XTD-3470-15 120



AWW-XTD-3470-20 121




AWW-XTD-3470-25 122



AWW-MD005-3F 123



AWW-MD005-4F 124



AWW-MD005-6F 125



AWW-MD005-8F 126




CE-XTD-B-S03 127



CE-XTD-B-S06 128




CE-XTD-B-S12 129



AWW-XTD10-B-01 130




AWW-XTD10-B-03 131



AWW-XTD10-B-06 132

TRIMLESS



MZ-R-A 134



MZ-S-A 134



MZ-WW 134



MZ-C 134



MZ-R-Z 134




MZ-S-Z 134



MZ-R-X 134



MZ-S-X 134



MZ-A 134



MZ-E-01 135



MZ-E-02 135



MZ-E-03 135




MZ-E-04 135

HONEYCOMB


CEILING




CELL DF 143



CELL GU 144



CELL RF 145



CELL SDF 146

TRIMLESS



AW-XTD-B-01 137



AW-XTD-B-02 138



AW-XTD-B-03 139



AW-XTD-B-05 140



AW-XTD-B-10 141




AW-XTD-B-15 142

Tiny S

Recessed

Quick Info


Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

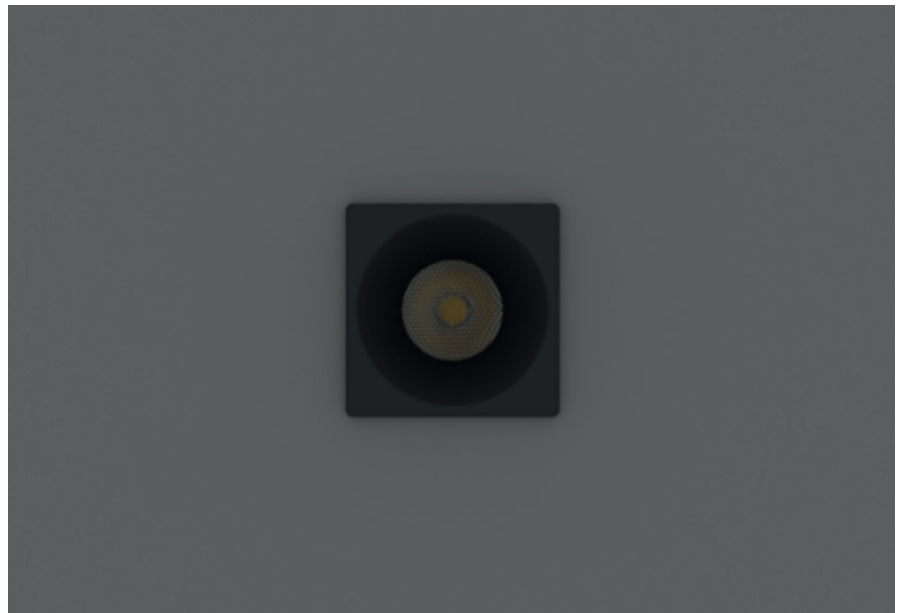



Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Tiny S	on-off/DALI	2W	350LM	90	220V	Ø47 x 38mm

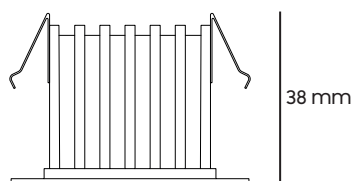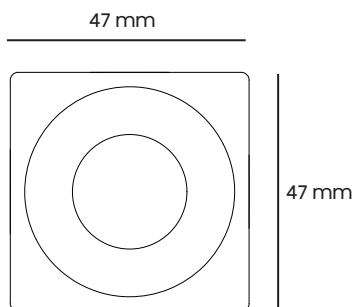


Tiny C

Recessed

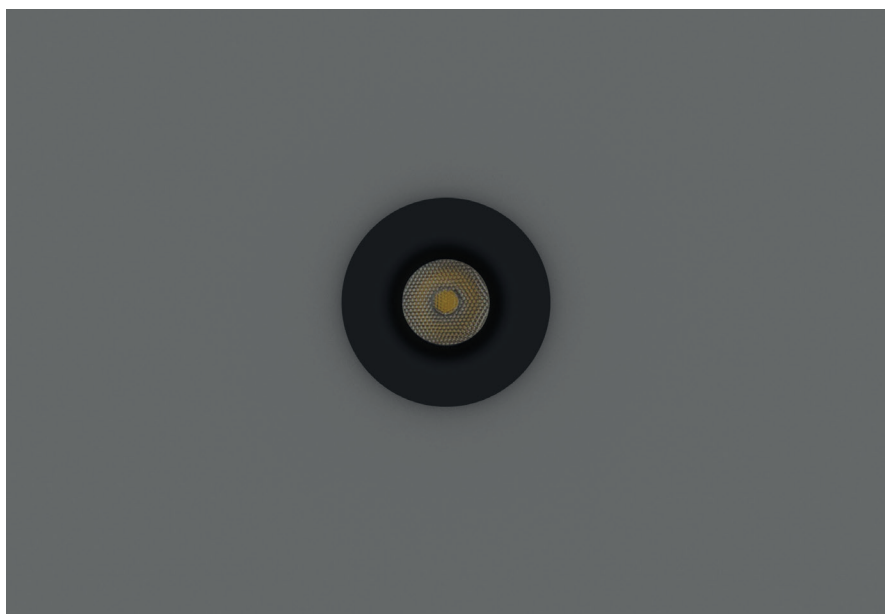

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Tiny C	on-off/DALI	2W	350LM	90	220V	Ø47 x 38mm

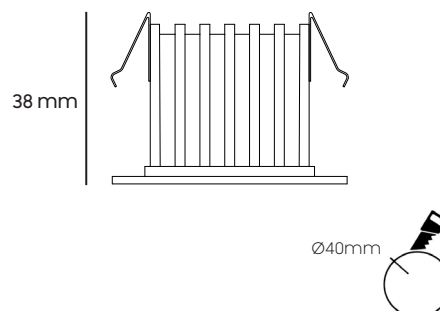



Miny S



Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

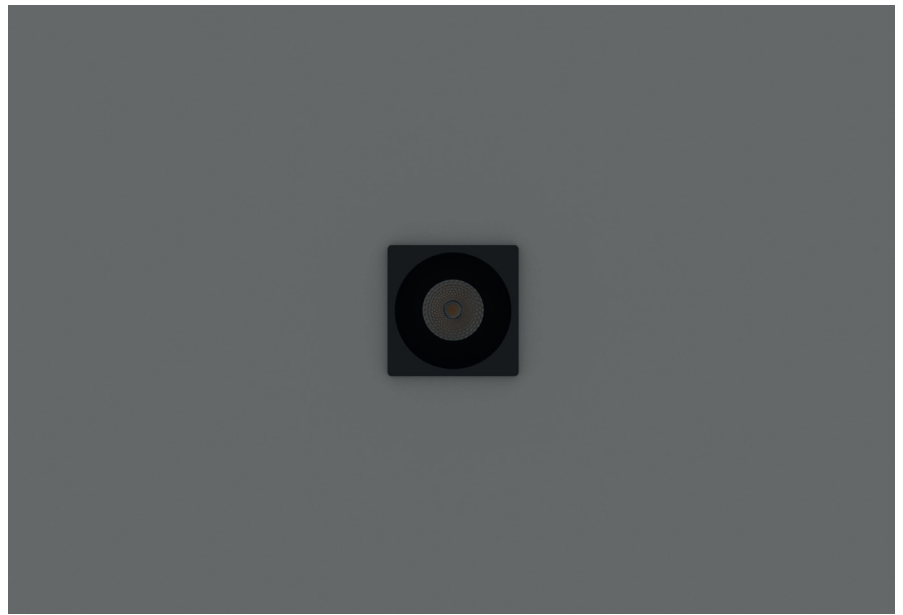


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Midy S	on-off/DALI	8-12W	W/175LM	90	220V	58.8 x 58.8 x 70 mm

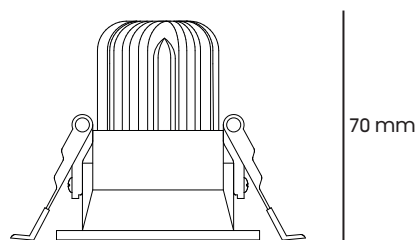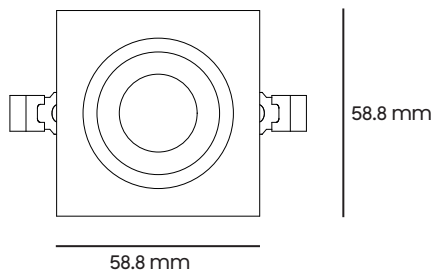


Midy C

Recessed

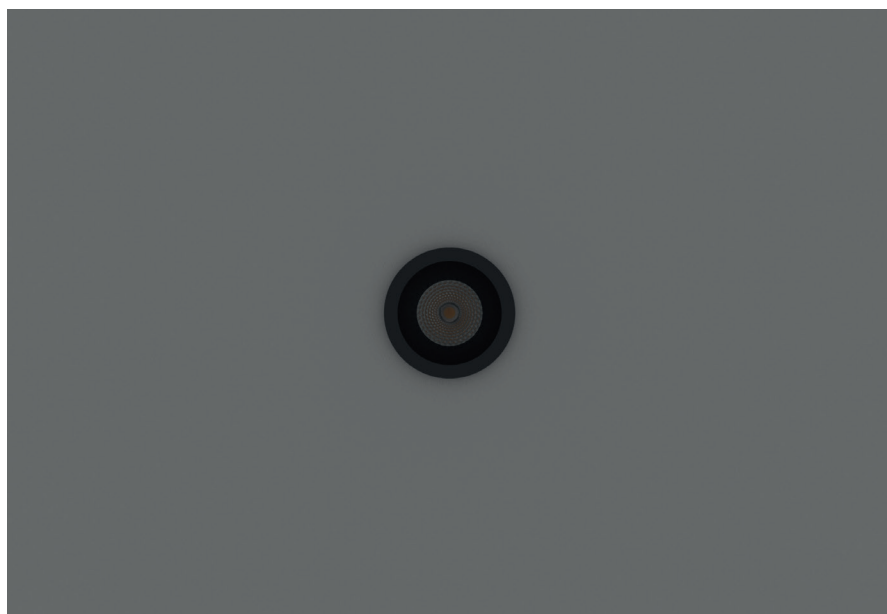

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Midy C	on-off/DALI	8-12W	W/175LM	90	220V	Ø58.8 x 70mm


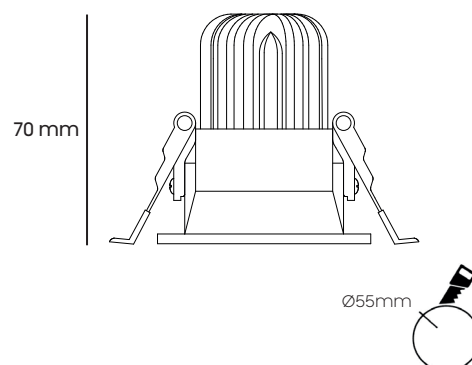



Midy SM



Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

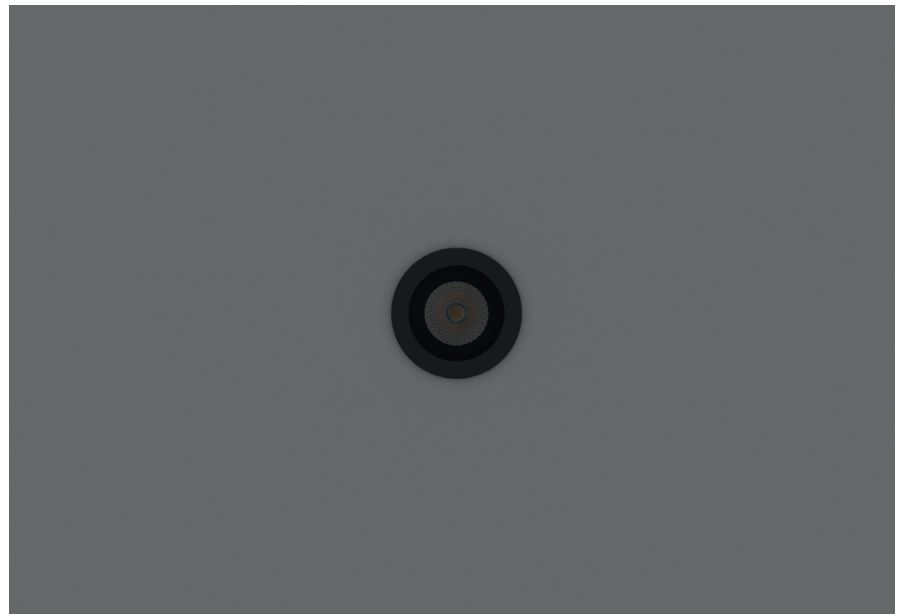


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Midy SM	on-off/DALI	8-12W	W/175LM	90	220V	Ø58.8 x 70mm




Lody S

Recessed

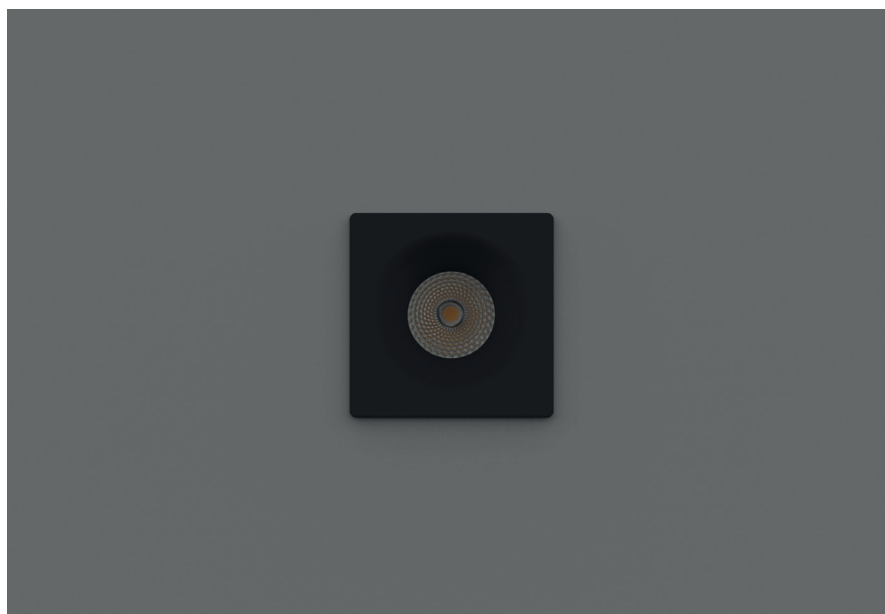

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Lody S	on-off/DALI	14-18W	W/175LM	90	220V	93 x 93 x 75mm


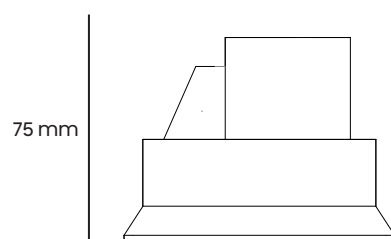
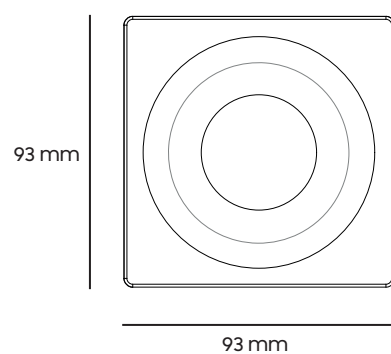


Lody C1




Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

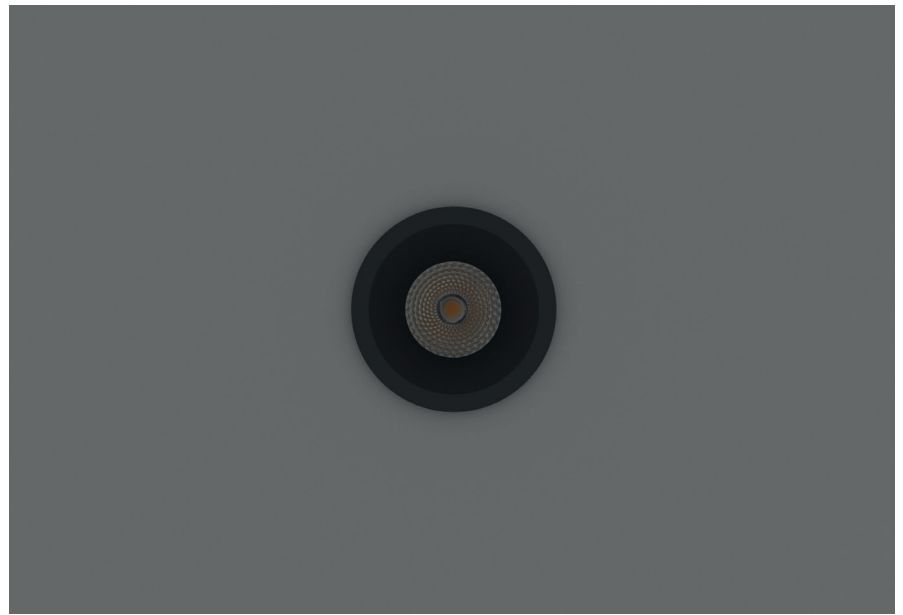


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Lody C1	on-off/DALI	14-18W	W/175LM	90	220V	Ø93 x 75 mm

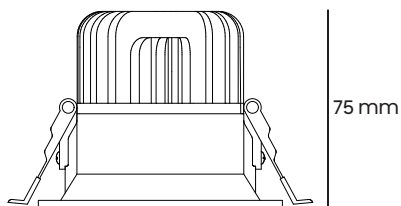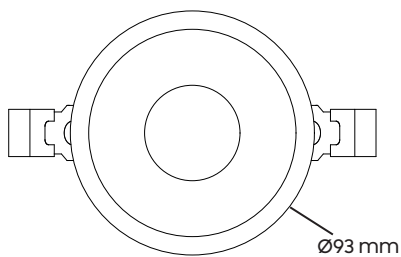


Lody C2

Recessed

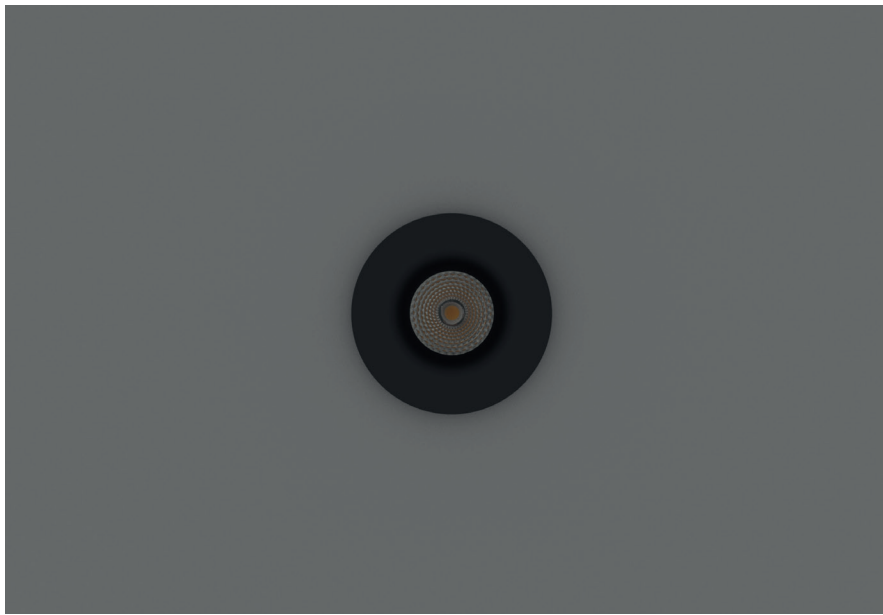

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Lody C2	on-off/DALI	14-18W	W/175LM	90	220V	Ø93 x 75mm


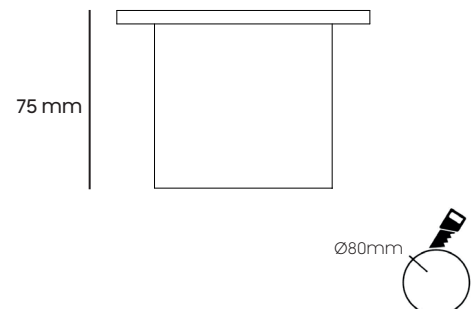



Rondo



Recessed

Quick Info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

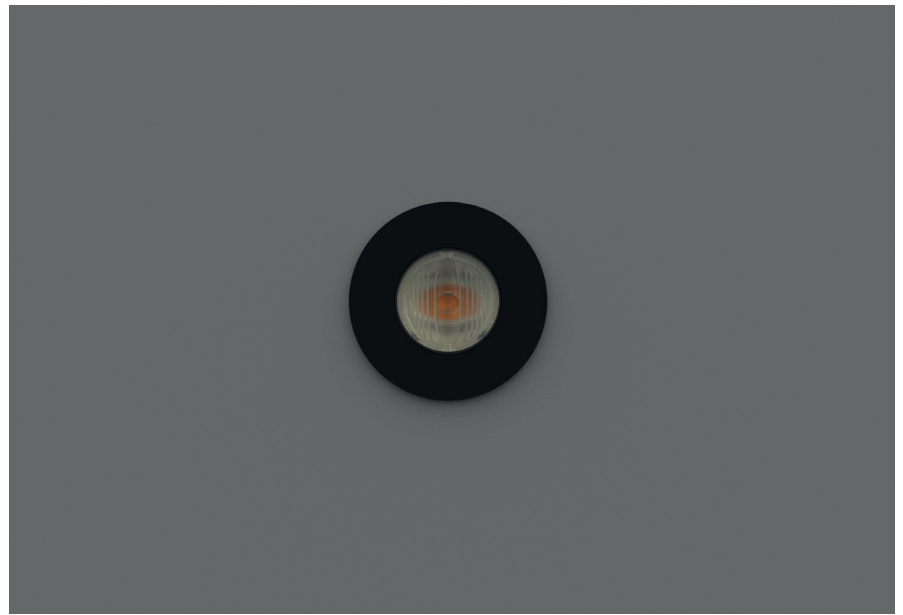

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Rondo	on-off/DALI	20W	W/175LM	90	220V	Ø100 x 70 mm

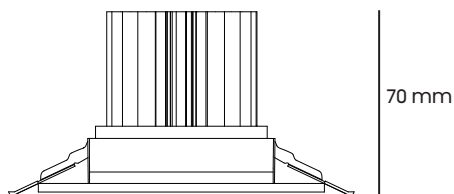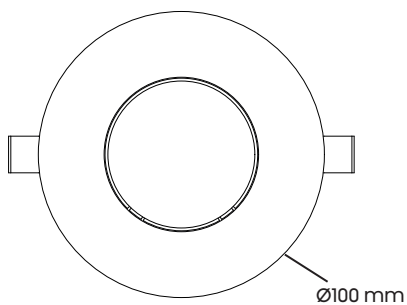


Effect 28X Tunable


Recessed

Quick Info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Move Diffuser 6	on-off/DALI	2W	370LM	90	220V	Ø x 25 x 100 mm





CE-XTD-R01


Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

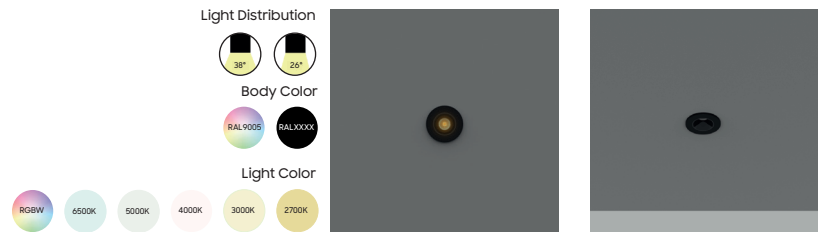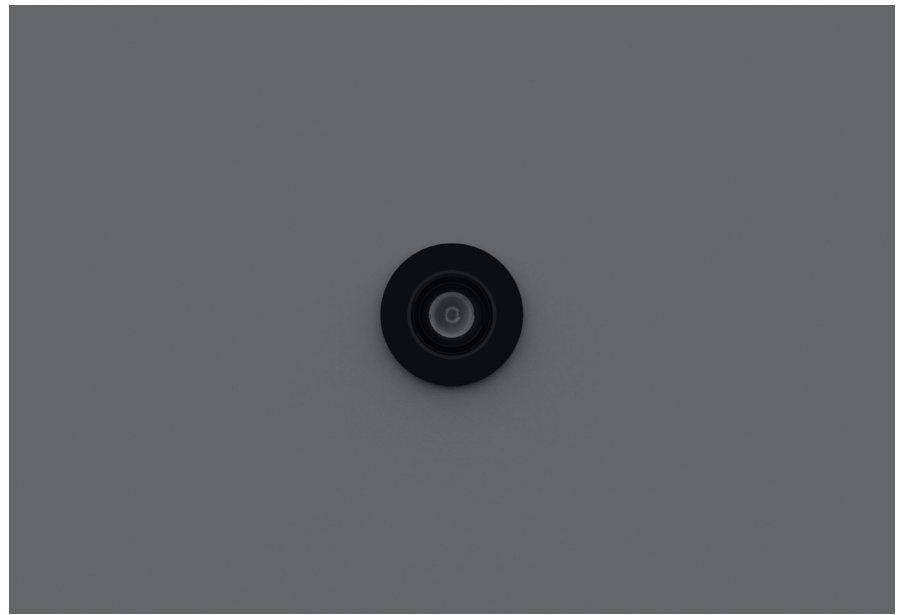


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-XTD-R01	on-off/DALI	2W	370LM	90	220V	Ø30 x 30mm

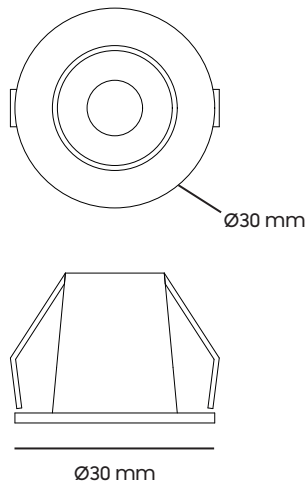


CE-XTD-S01

Recessed

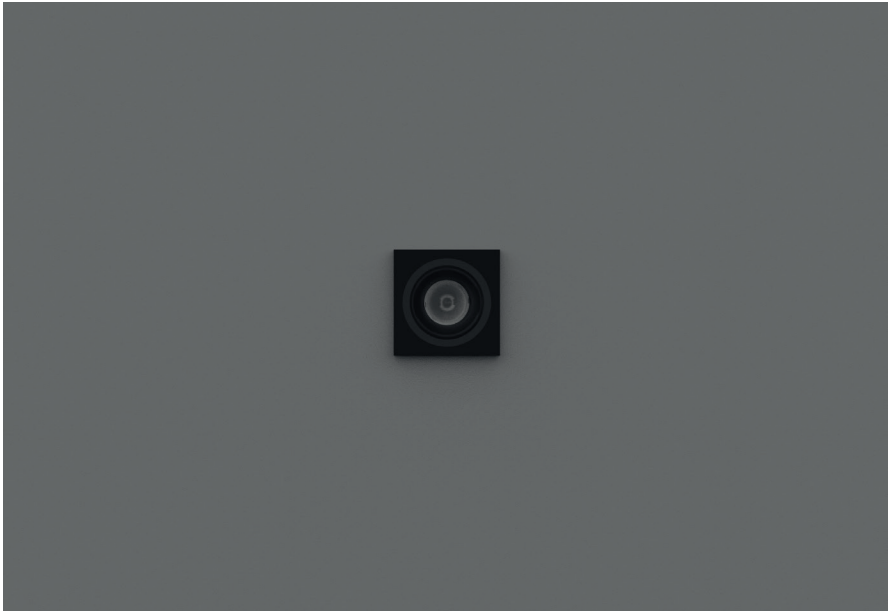

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

26° 38°



Body Color

RAL9005 RAL9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-XTD-S01	on-off/DALI	2W	370LM	90	220V	30 x 30mm

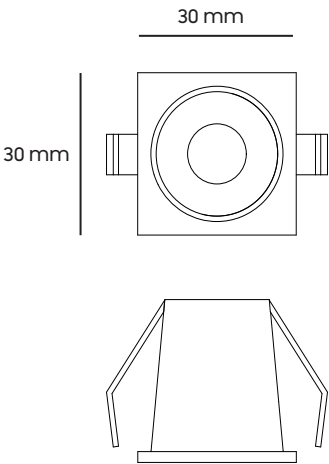


CE-XTD-R04

Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

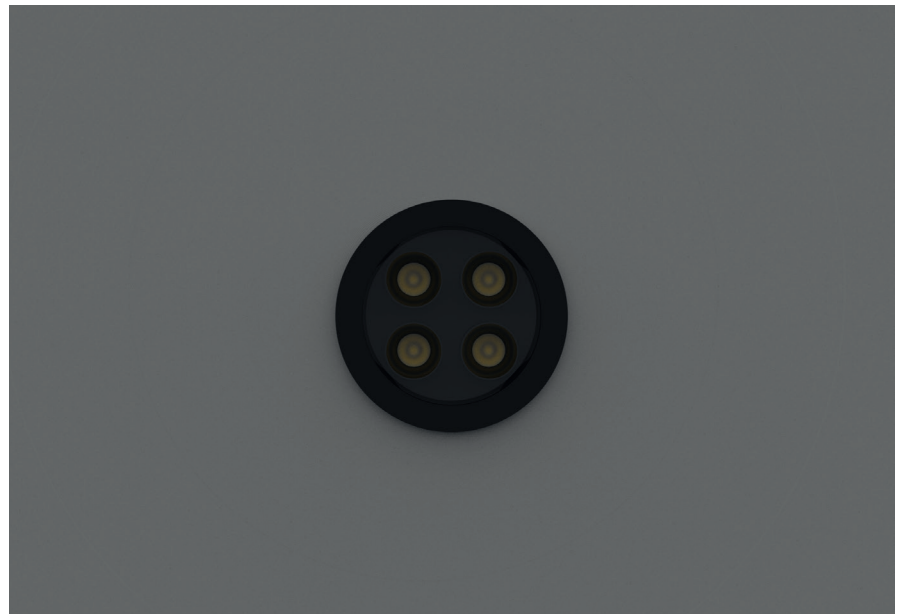


Light Distribution





Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-XTD-R04	on-off/DALI	8W	1480LM	90	220V	Ø65 x 40mm

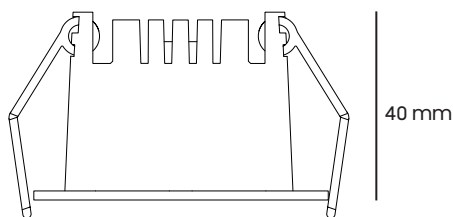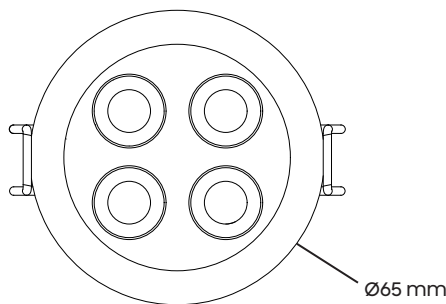



CE-XTD-S04

Recessed

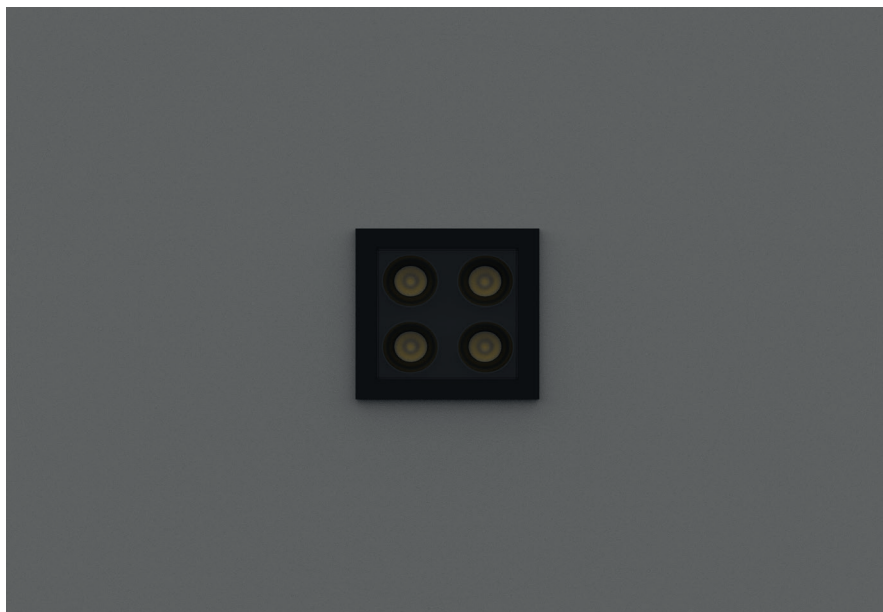

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution






Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-XTD-S04	on-off/DALI	8W	1480LM	90	220V	52 x 52 x 40mm

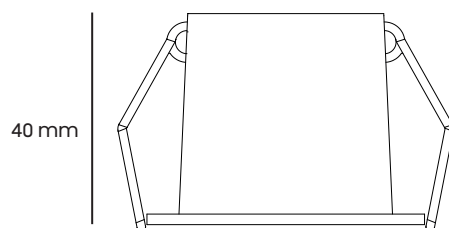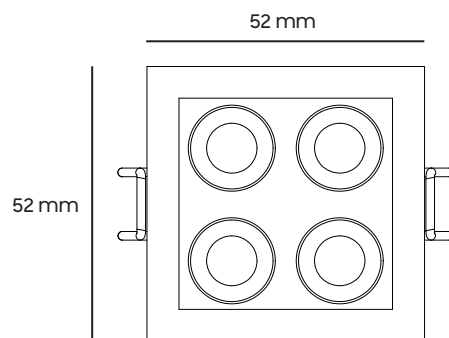


CE-XTD-S03

Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

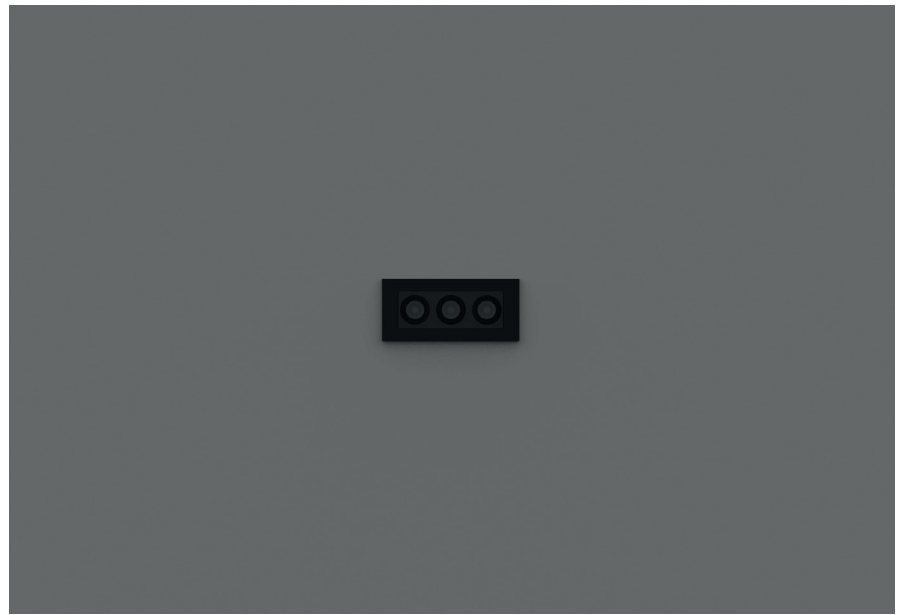



Light Distribution





Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-XTD-S03	on-off/DALI	6W	1110LM	90	220V	69 x 31 x 40mm




CE-XTD-S06

Recessed

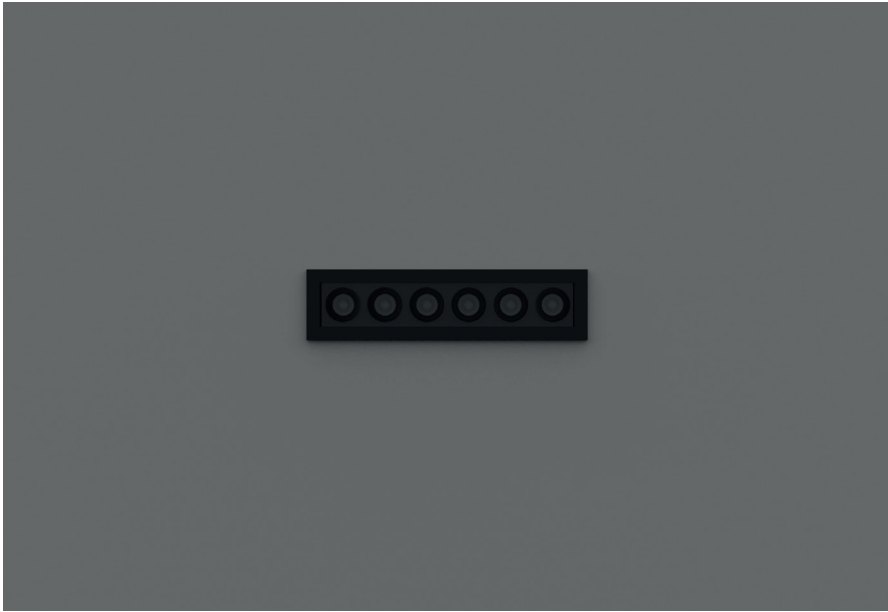

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

26° 38°



Body Color

RAL9005 RAL9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-XTD-S06	on-off/DALI	10W	1850LM	90	220V	126 x 31 x 40mm


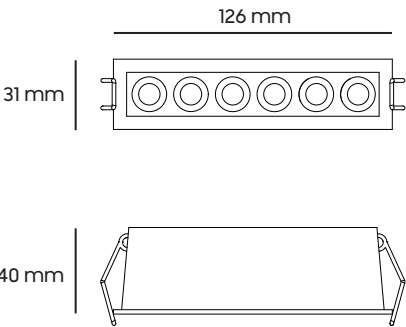


CE-XTD-S12



Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

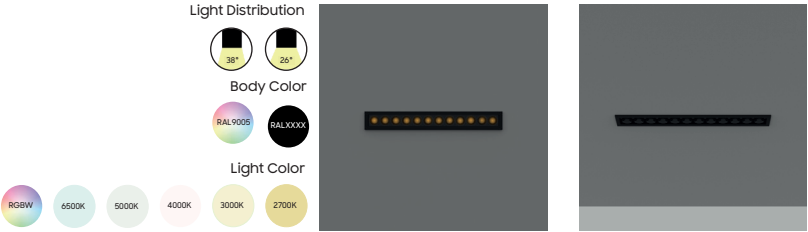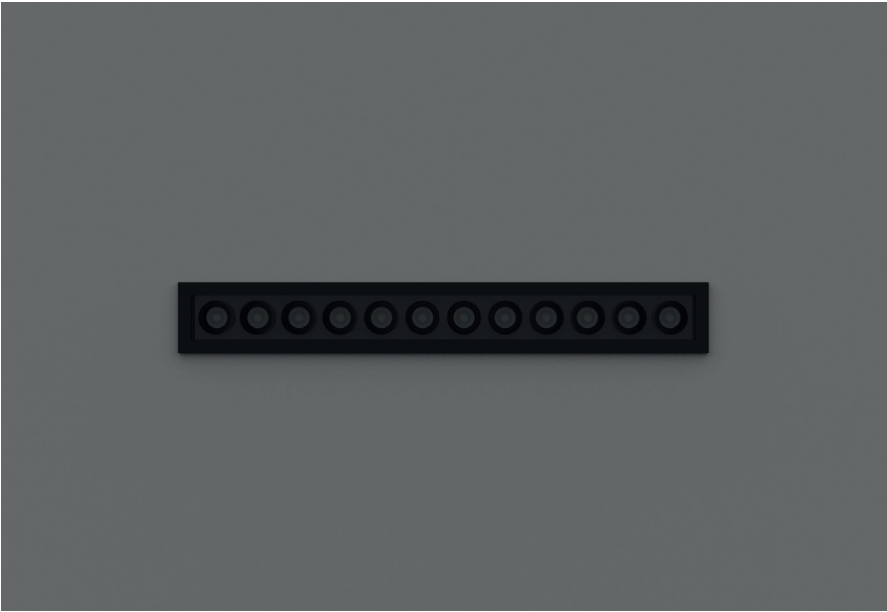


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-X TD-S12	on-off/DALI	20W	3700LM	90	220V	240 x 31 x 40mm


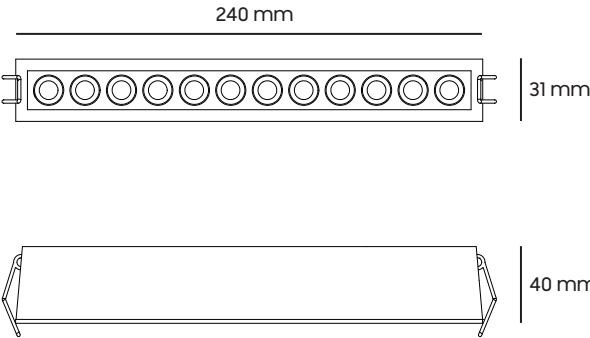


CE-GSD-S03

Recessed

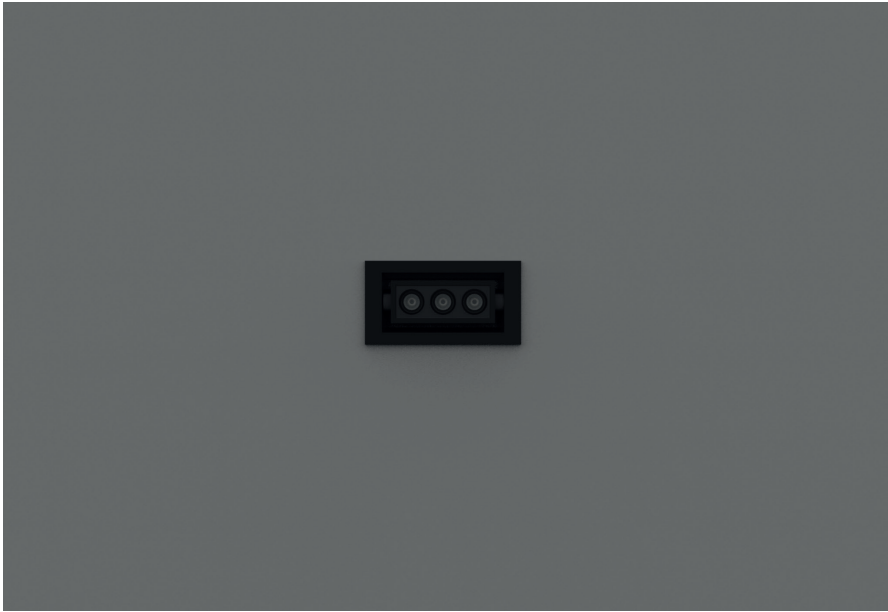

Quick Info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

25° 40°



Body Color

RAL9005 RAL9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-GSD-S03	on-off/DALI	5W	925LM	90	220V	68,6 x 49 x 44mm

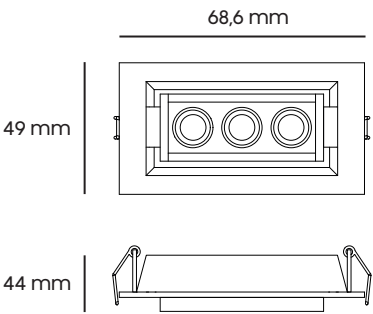


CE-GSD-S06

Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

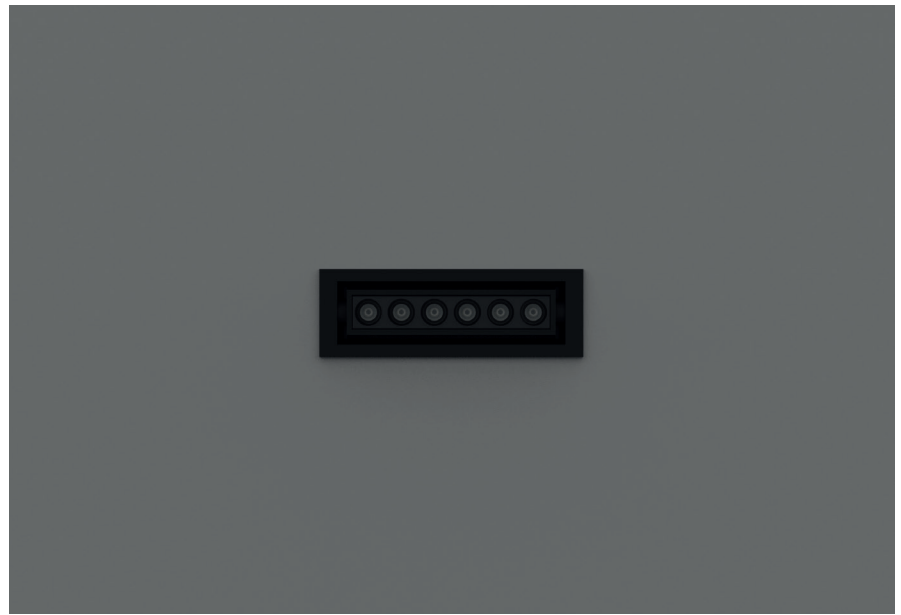


Light Distribution






Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-GSD-S06	on-off/DALI	10W	1850LM	90	220V	141 x 49 x 44mm

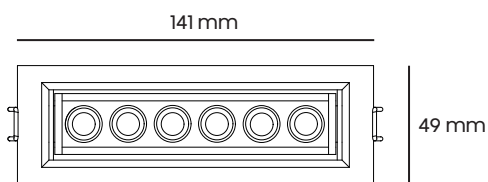



CE-GSD-S12

Recessed



Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-GSD-S12	on-off/DALI	20W	3700LM	90	220V	255 x 49 x 44mm

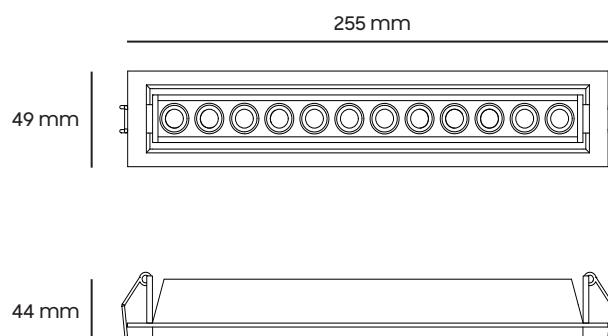

CE-GSD-S6X2

Recessed

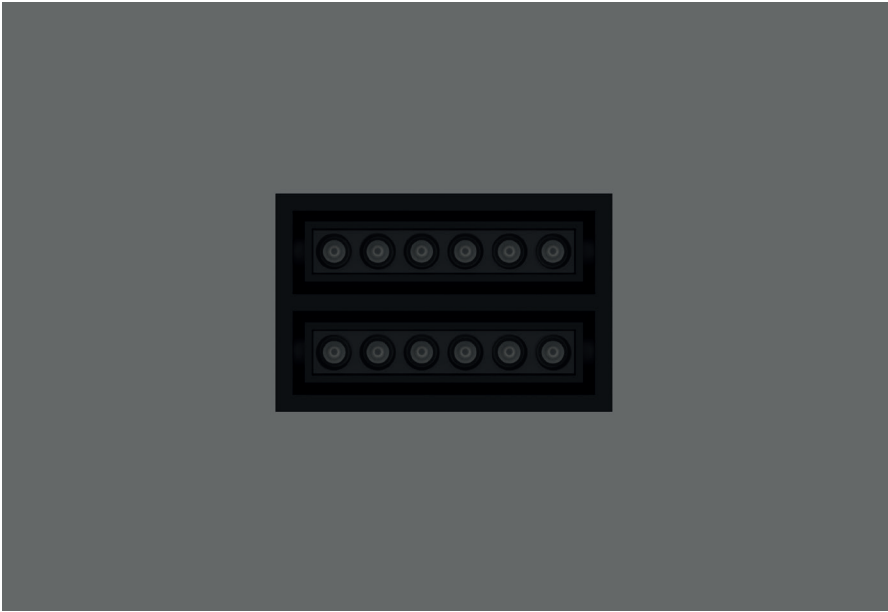

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-GSD-S06X2	on-off/DALI	2 x 10W	2 x 1850LM	90	220V	147 x 100 x 44mm

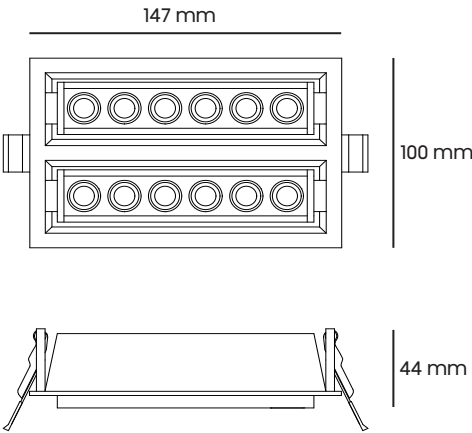



CE-GSD-S12X2

Recessed



Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-GSD-S12x2	on-off/DALI	2 x 20W	2 x 3700LM	90	220V	261 x 100 x 44mm

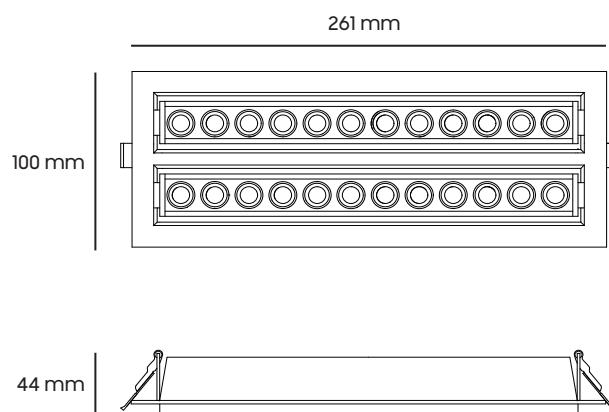

CE-R1-R-01

Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9




Light Distribution





Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-R1-R-01	on-off/DALI	8W	1480LM	90	220V	Ø53 x 177.6mm (Ø23 x 138mm)

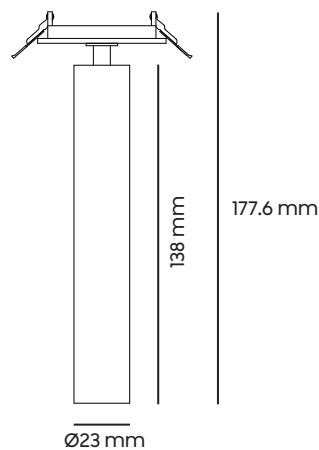

CE-R1-R-02

Recessed

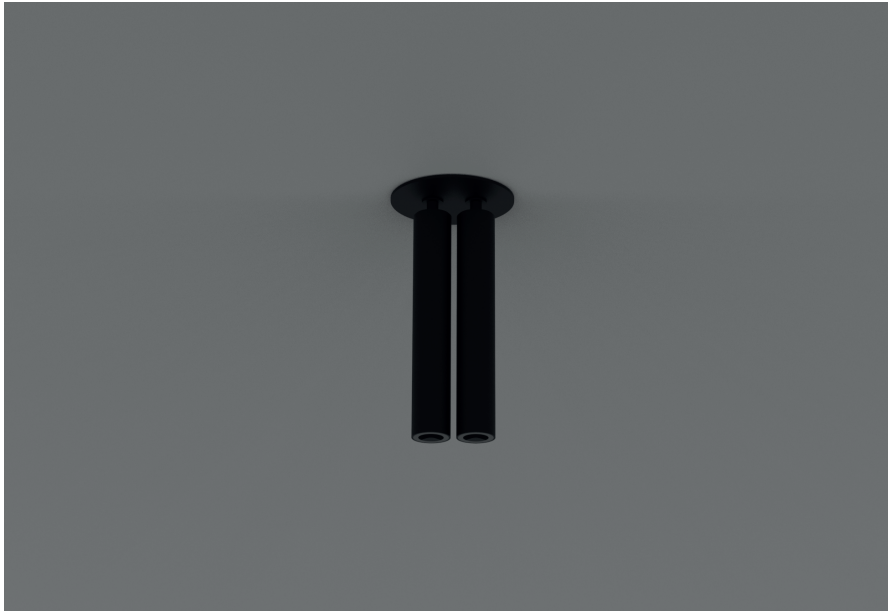

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

26° 38°


Body Color

RAL9000 RAL9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-R1-R-02	on-off/DALI	2 x 8W	2 x 1480LM	90	220V	Ø75 x 177.6mm (Ø23 x 138mm)

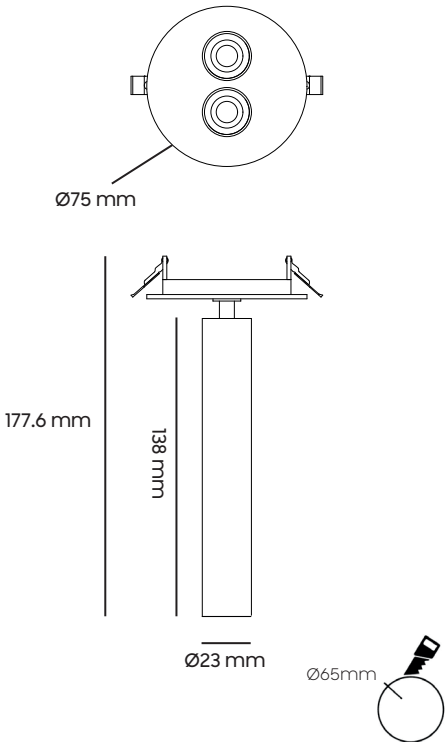


CE-R1-S-01

Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

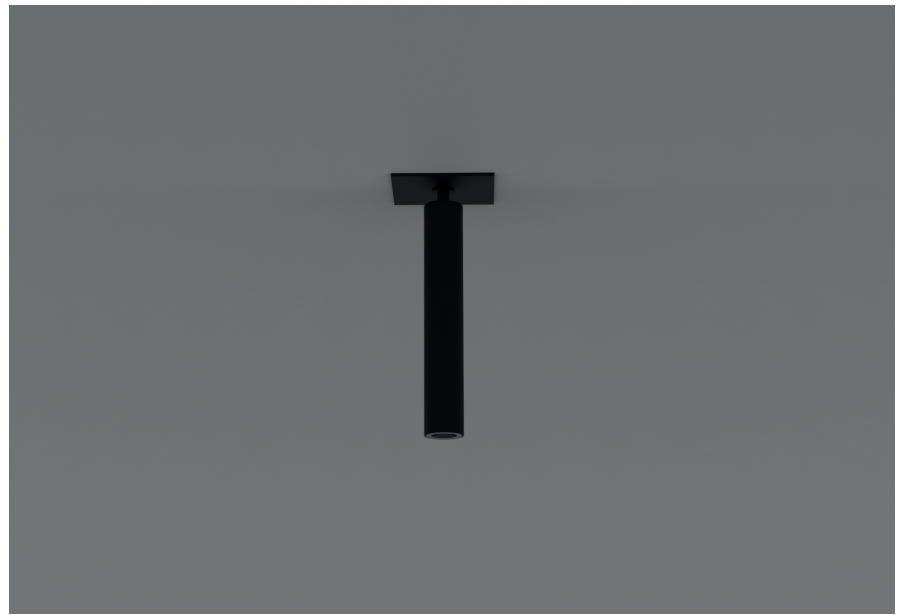


Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-R1-S-01	on-off/DALI	8W	1480LM	90	220V	60 x 60 x 177.8mm (Ø23 x 138mm)

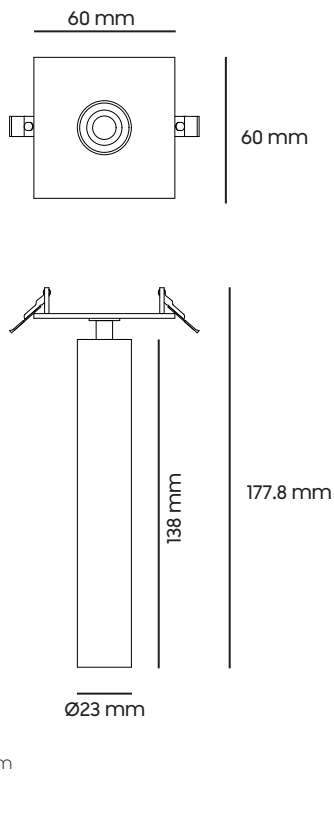


CE-R1-S-02

Recessed

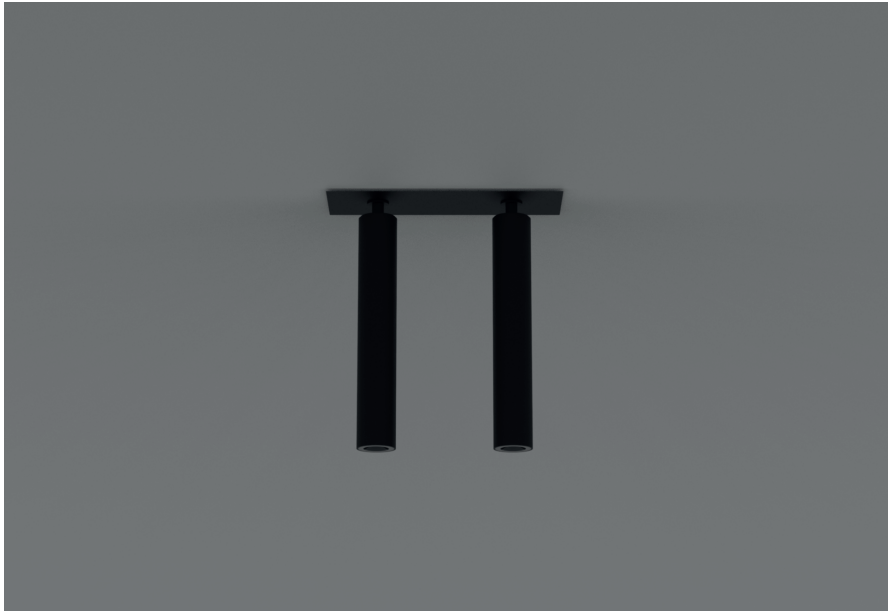

Quick Info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

26° 38°




Body Color

RAL9000 RAL9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-R1-S-02	on-off/DALI	2 x 8W	2 x 1480LM	90	220V	150 x 60 x 177.8mm (Ø23 x 138mm)

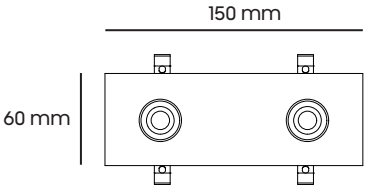


CE-R1-S-03

Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

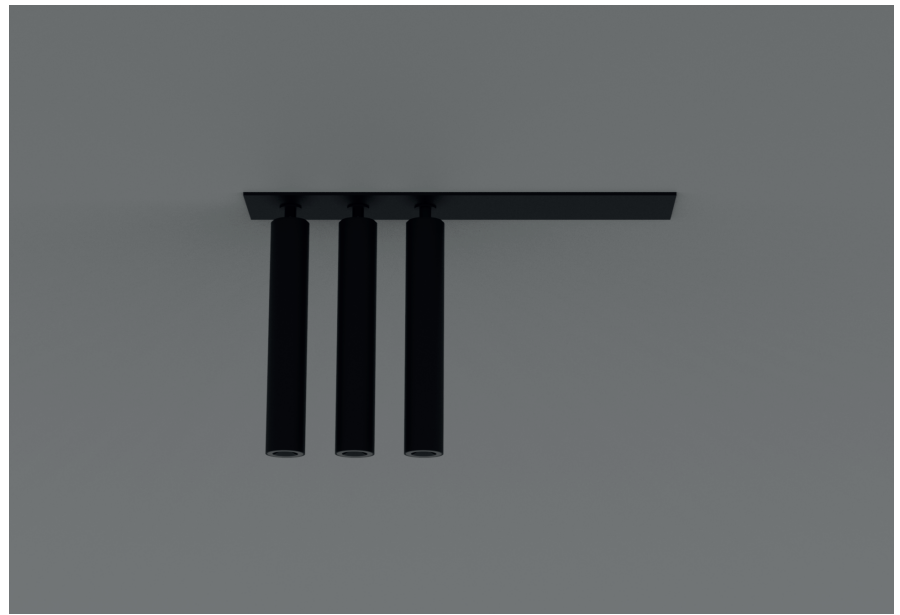

Light Distribution






Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-R1-S-03	on-off/DALI	3 x 8W	3 x 1480LM	90	220V	265 x 60 x 177.8mm (Ø23 x 138mm)

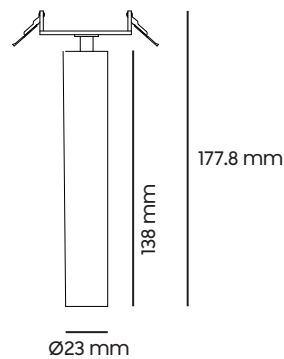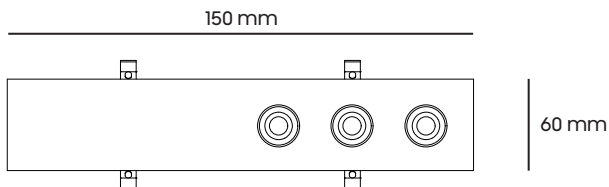


CE-R01-LS-A

Recessed



Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-R01-LS-A	on-off/DALI	8W	1480LM	90	220V	Ø62 x 251.5mm

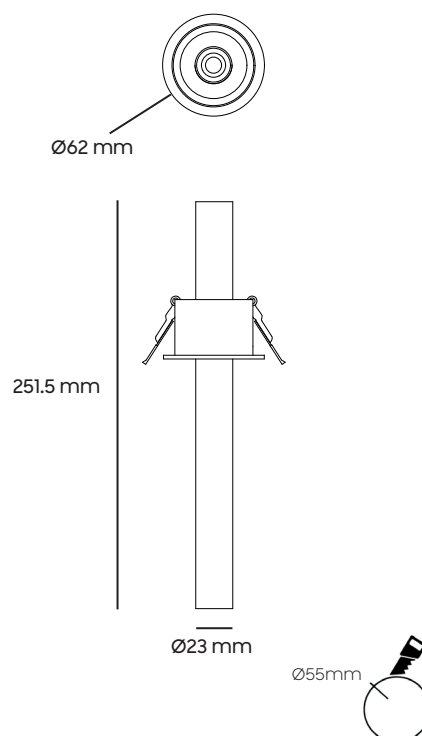


CE-C48-R-01

Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

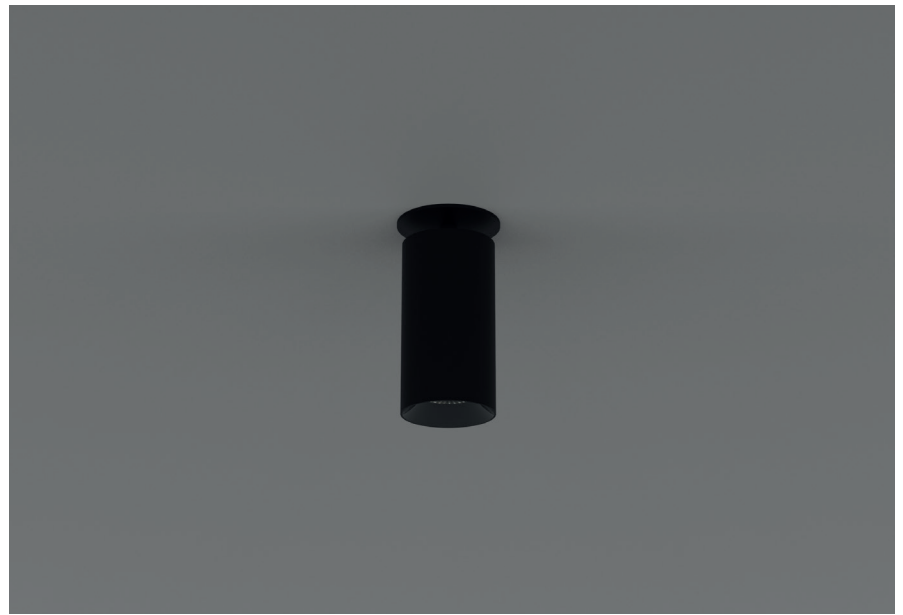


Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-C48-R-01	on-off/DALI	8W	1480LM	90	220V	Ø53 x 132.7mm (Ø47.4x 90mm)

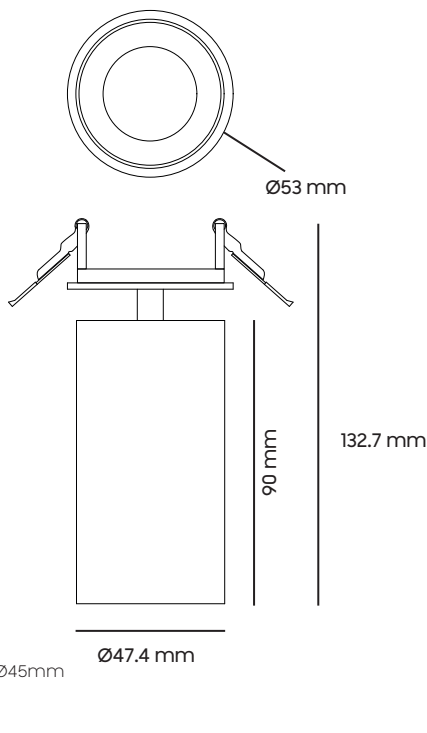


CE-WX-R04-A

Recessed



Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-WX-R04-A	on-off/DALI	10W	1850LM	90	220V	Ø105 x 126.4mm (Ø54.4 x 76.4mm)

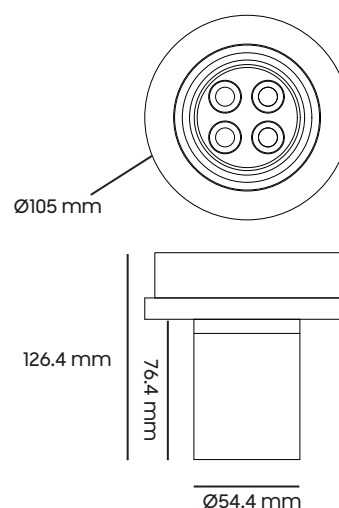


CE-LM-R03-SD

Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

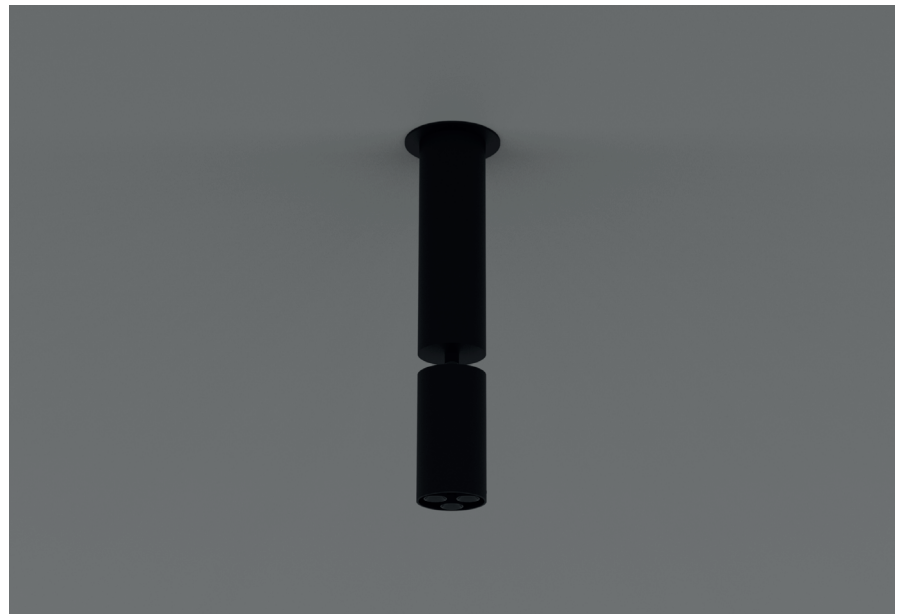


Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-LM-R03-SD	on-off/DALI	8W	1480LM	90	220V	Ø47.4 x 263.7mm

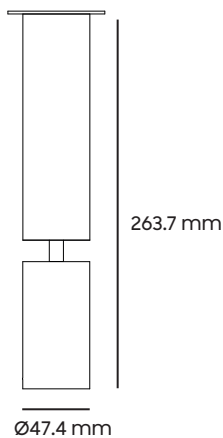


NMW-WX-100

Recessed



Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-WX-100	on-off/DALI	10W	1850LM	90	220V	Ø115 x 84 mm (Ø67 mm)

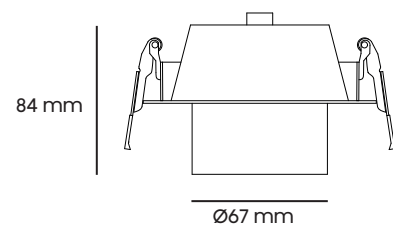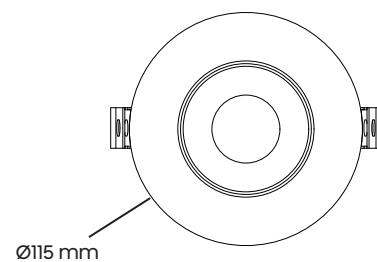


NMW-WX-170

Recessed

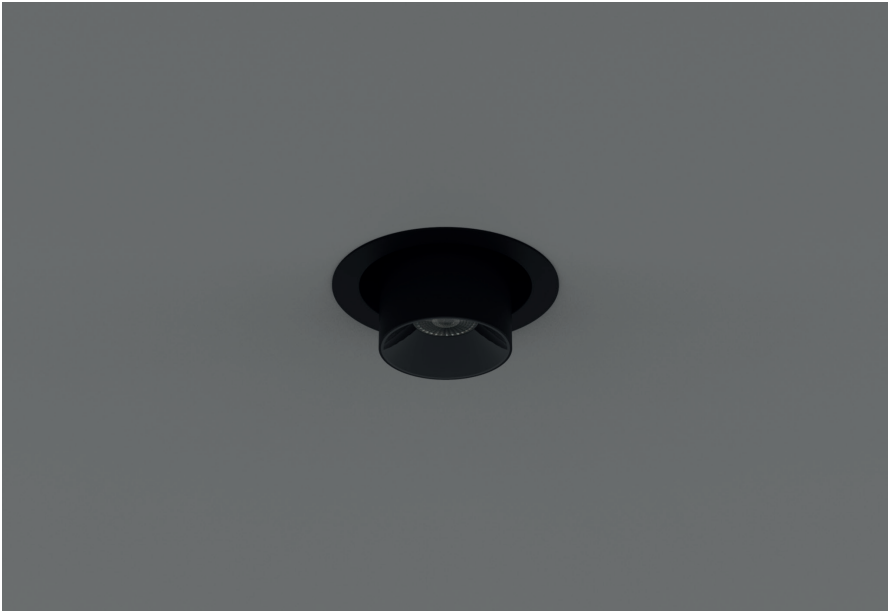

Quick Info



Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-WX-170	on-off/DALI	30W	5550LM	90	220V	Ø190 x 124.5 mm (Ø107 mm)

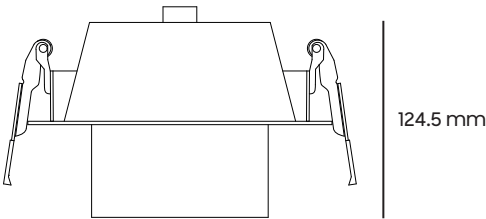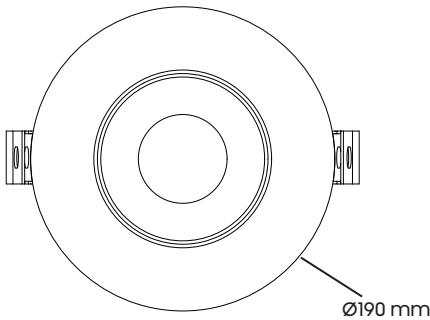


CE-C48-S-01

Recessed



Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-C48-S-01	on-off/DALI	8W	1480LM	90	220V	60 x 60 x 132.7mm (Ø47.4 x 90mm)


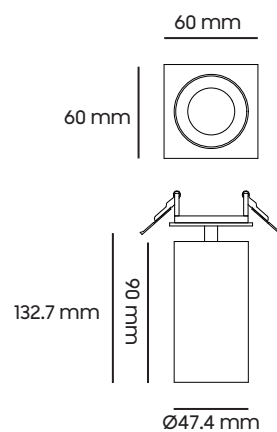


CE-C48-S-02




Recessed

Quick Info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-C48-S-02	on-off/DALI	2 x 8W	2 x 1480LM	90	220V	300 x 60 x 132.7mm (Ø47.4 x 90mm)

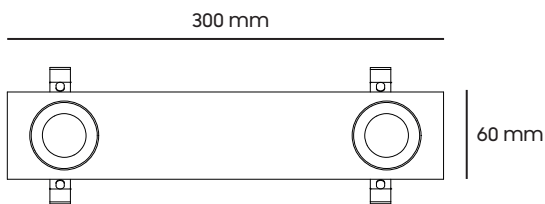


CE-C48-S-03

Recessed

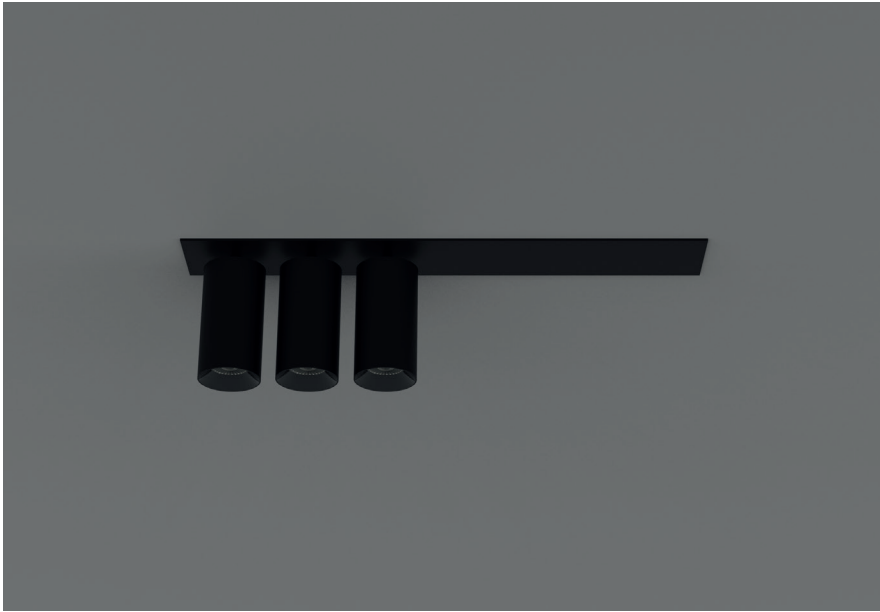

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution






Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-C48-S-03	on-off/DALI	8W	1480LM	90	220V	400 x 60 x 132.7mm (Ø47.4 x 90mm)

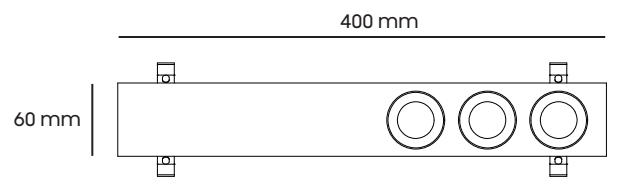

CE-R4-R-01

Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9




Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-R4-R-01	on-off/DALI	10W	1850LM	90	220V	Ø53 x 147.7mm (Ø54.4 x 105mm)

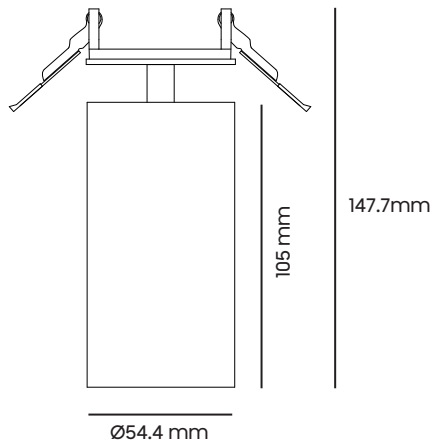


CE-R4-S-01

Recessed



Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution






Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-R4-S-01	on-off/DALI	10W	1850LM	90	220V	60 x 60 x 147.7mm (Ø54.4 x 105mm)

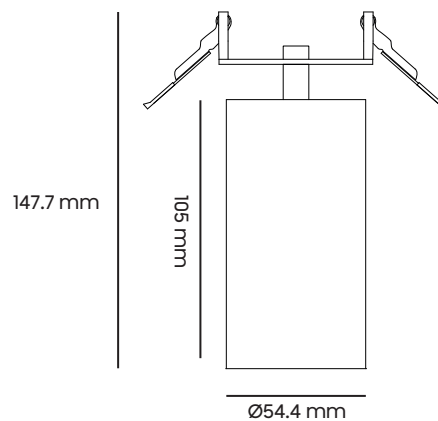

CE-R4-S-02

Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9




Light Distribution






Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-R4-S-02	on-off/DALI	2 x 10W	2 x 1850LM	90	220V	300 x 60 x 147.7mm (Ø54.4x105mm)

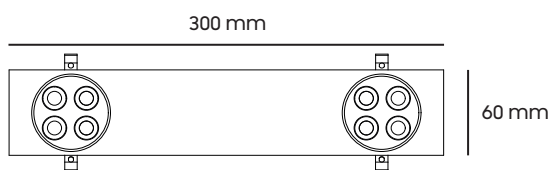


CE-R4-S-03

Recessed



Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution






Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-R4-S-03	on-off/DALI	3 x10W	3 x 1850LM	90	220V	400 x 60 x 147.7mm (Ø54.4 x 105mm)

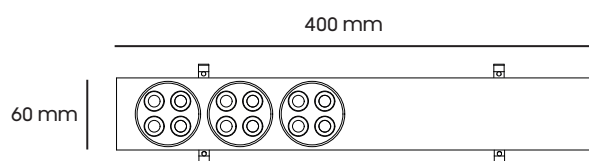

AW-XTD10-01

Recessed

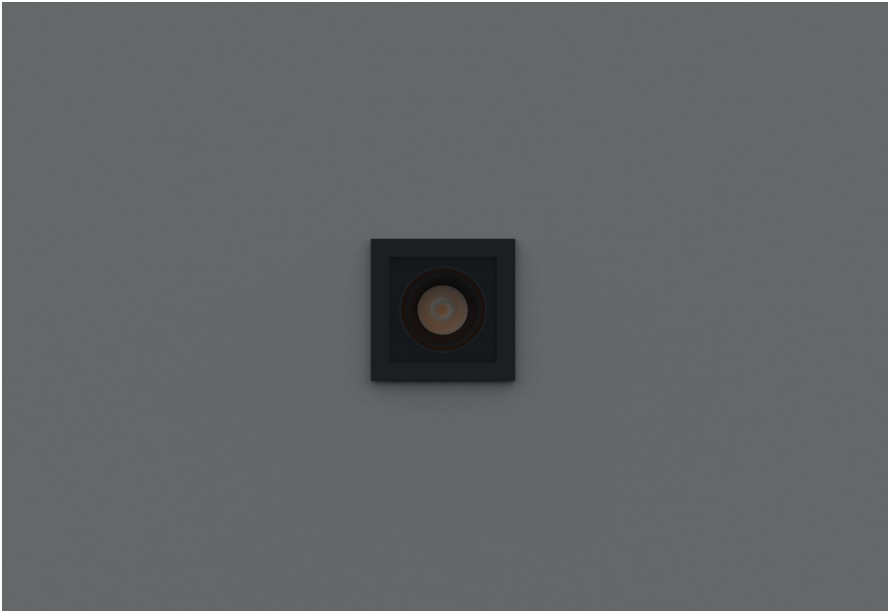

Quick Info



Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

Light Distribution

Body Color


Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD10-01	on-off/DALI	5W	925LM	90	220V	61.5 x 61.5 x 55mm


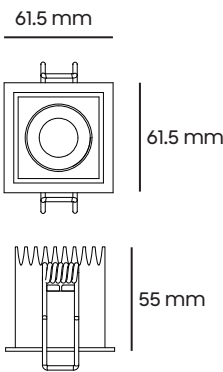


AW-XTD10-03

Recessed

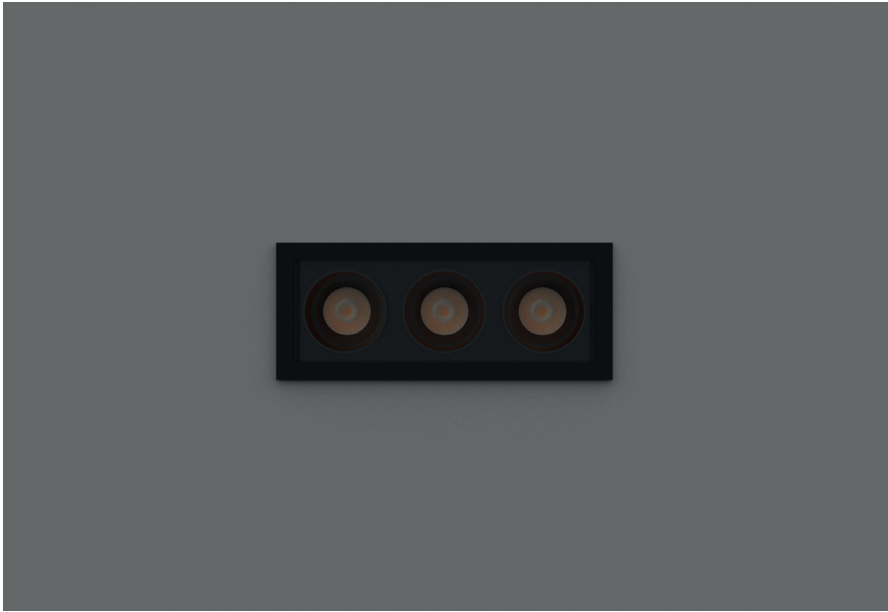

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

24° 35° 50°



Body Color

RAL9005 RAL9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD10-03	on-off/DALI	15W	2775LM	90	220V	152.4 x 62.4 x 55mm


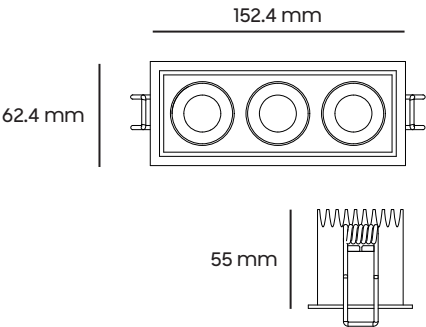


AW-XTD10-06

Recessed

Quick Info


Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

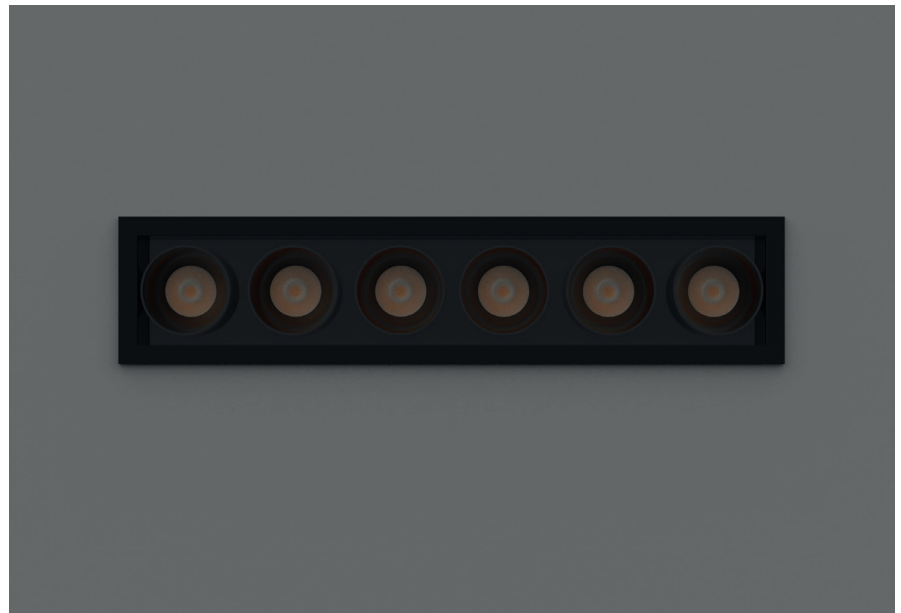



Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD10-06	on-off/DALI	30W	5550LM	90	220V	287.4 x 62.4 x 55mm

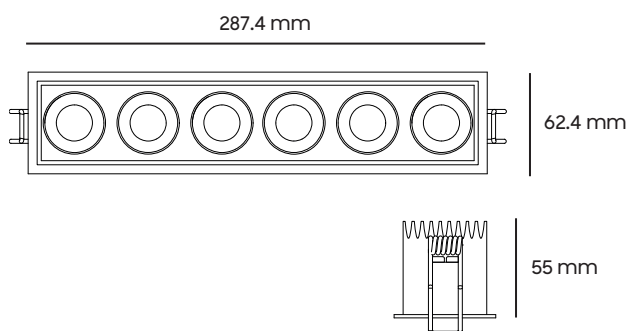

MZ

Recessed



MZ-R-X

44.3 mm



44.3 mm



55 mm



MZ-S-A


44.3 mm



44.3 mm



55 mm



MZ-WW


44.3 mm



44.3 mm



80.3 mm



MZ-C

44.3 mm



44.3 mm



55 mm



MZ-R-Z


44.3 mm



44.3 mm



62.5 mm



MZ-S-Z

44.3 mm



44.3 mm



62.5 mm



MZ-R-X


44.3 mm



44.3 mm



62.5 mm



MZ-S-X


44.3 mm



44.3 mm



62.5 mm



MZ-A

44.3 mm



44.3 mm



63 mm

Light Distribution
















Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
MZ-R-X	on-off/DALI	5W	5550LM	90	220V	44.3 x 44.3 x 55mm
MZ-S-A	on-off/DALI	5W	5550LM	90	220V	44.3 x 44.3 x 55mm
MZ-WW	on-off/DALI	5W	5550LM	90	220V	44.3 x 80.3 x 55mm
MZ-C	on-off/DALI	5W	5550LM	90	220V	44.3 x 44.3 x 55mm
MZ-R-Z	on-off/DALI	5W	5550LM	90	220V	44.3 x 44.3 x 62.5mm
MZ-S-Z	on-off/DALI	5W	5550LM	90	220V	44.3 x 44.3 x 62.5mm
MZ-R-X	on-off/DALI	5W	5550LM	90	220V	44.3 x 44.3 x 62.5mm
MZ-A	on-off/DALI	5W	5550LM	90	220V	44.3 x 44.3 x 63mm





TD069-55

Recessed

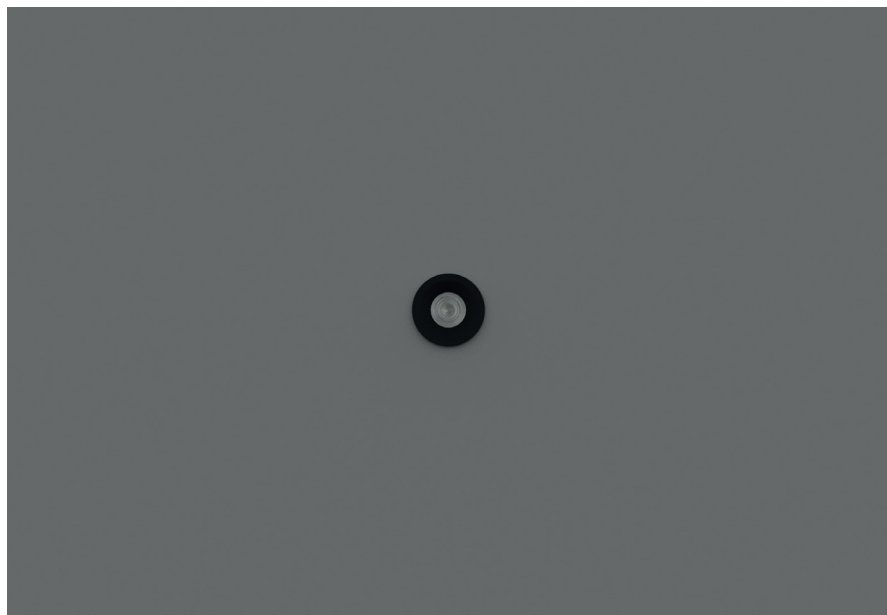

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
TD069-55	on-off/DALI	5W	925LM	90	220V	Ø52 x 25mm




TD069-65

Recessed

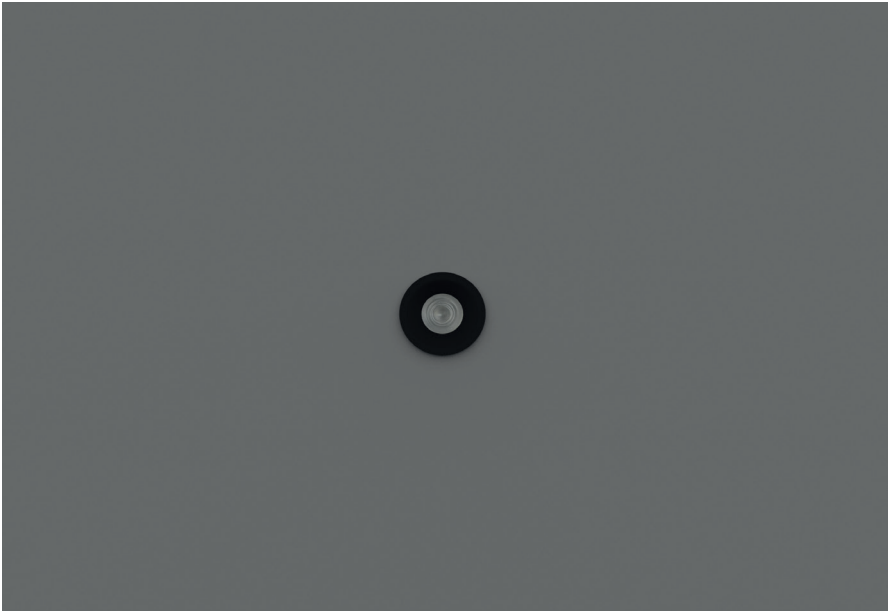


Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

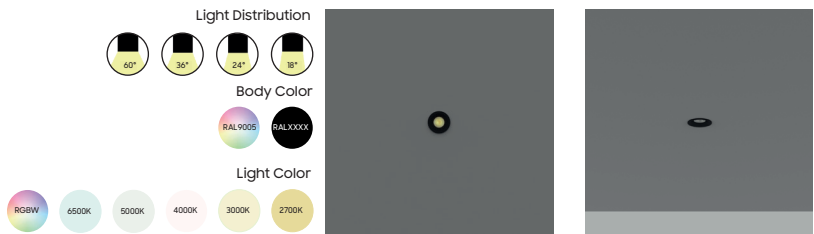


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
TD069-65	on-off/DALI	9W	1665LM	90	220V	Ø72 x 28.3mm





TD069-75

Recessed

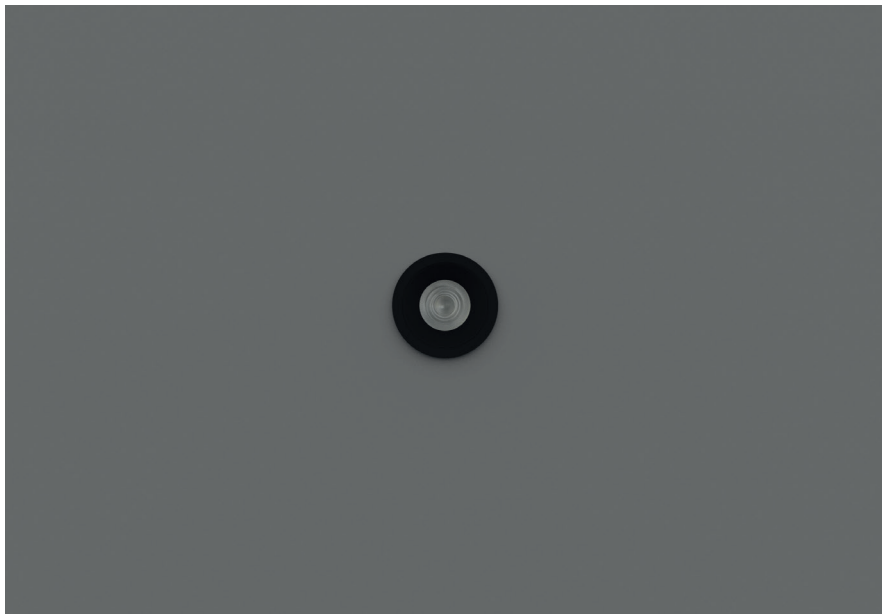

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
TD069-75	on-off/DALI	12W	2220LM	90	220V	Ø83 x 31.1mm

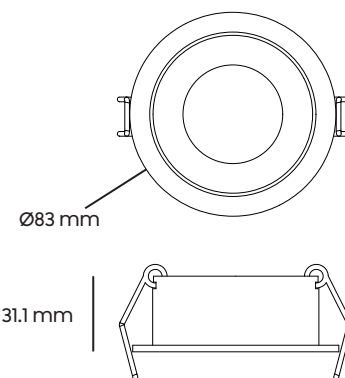


TD069-95

Recessed



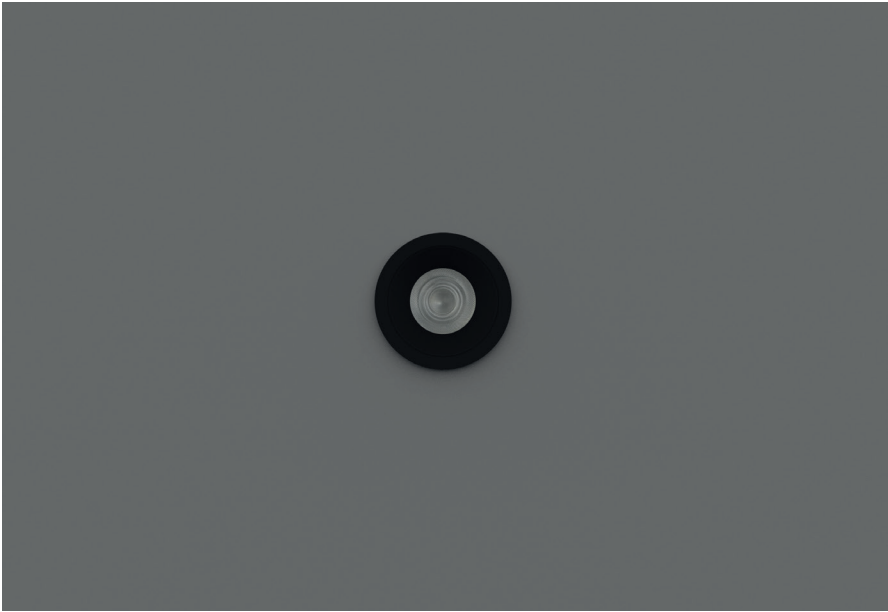


Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

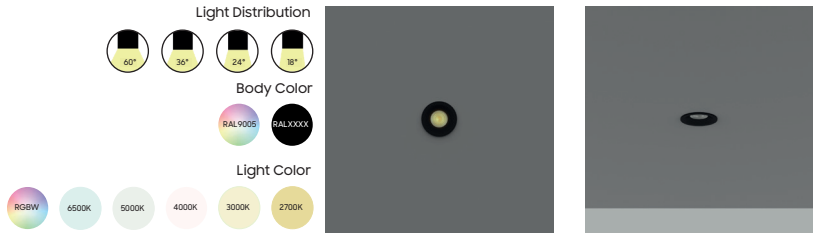


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
TD069-95	on-off/DALI	15W	2775LM	90	220V	Ø105 x 34.4mm

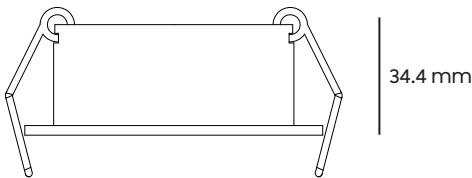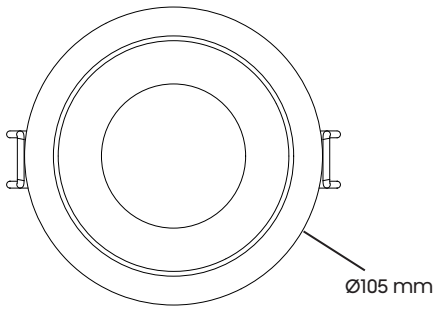


TD068-55

Recessed

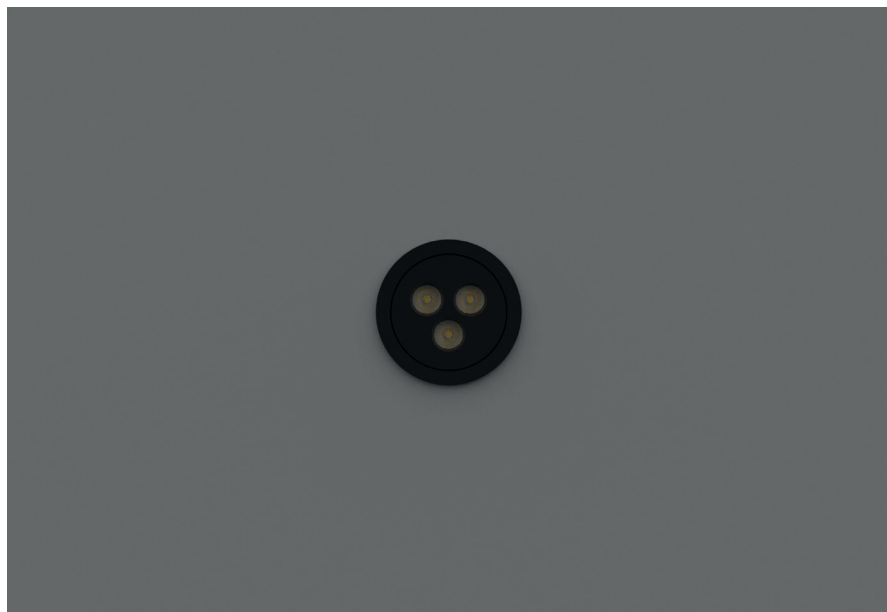

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
TD068-55	on-off/DALI	6W	1110LM	90	220V	Ø60 x 35.5mm

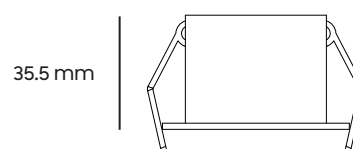

TD068-70

Recessed



Quick Info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9


Light Distribution





Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
TD068-70	on-off/DALI	12W	2220LM	90	220V	Ø80 x 50.5mm

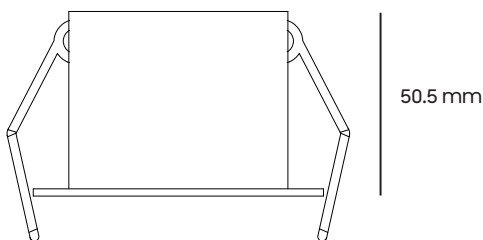
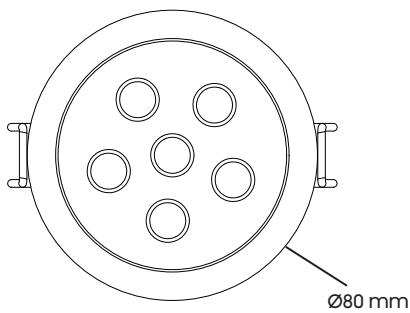


NMW-TD-50

Recessed

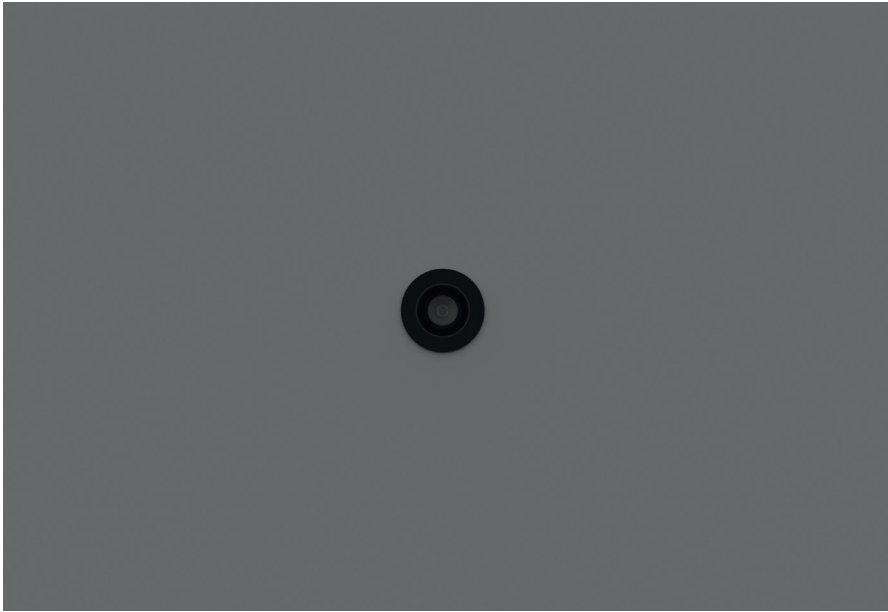

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

15° 24° 36°


Body Color

RAL 9001 RAL 9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-TD-50	on-off/DALI	5W	925LM	90	220V	Ø57 x 47mm





NMW-TD-60



Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

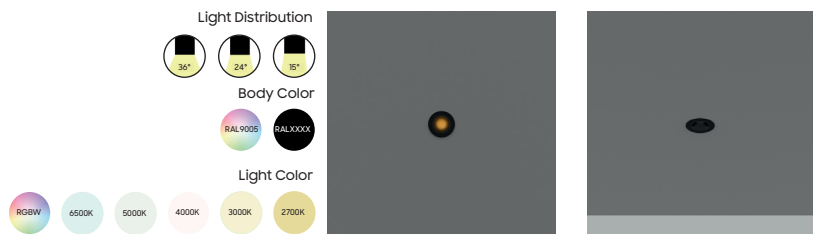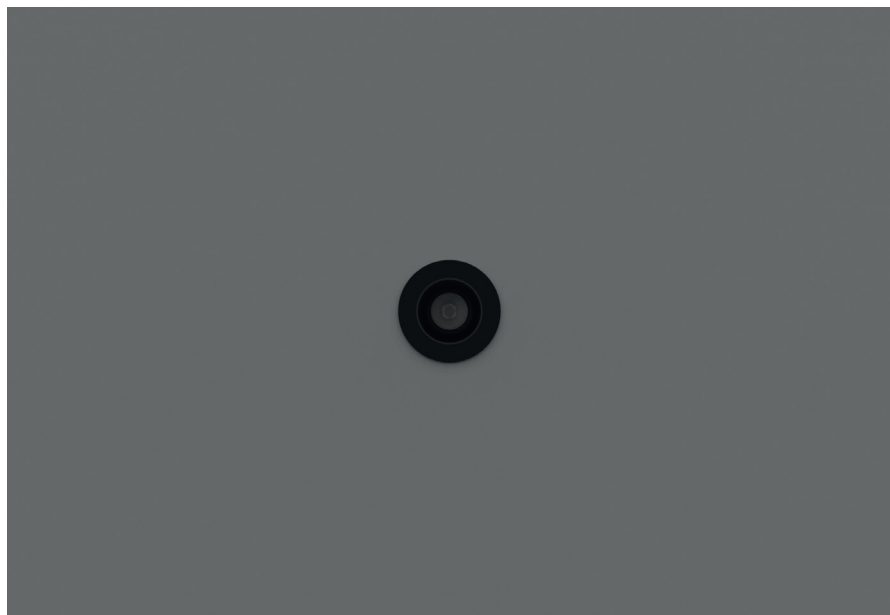


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-TD-60	on-off/DALI	9W	1665LM	90	220V	Ø67 x 60mm





NMW-TD-75

Recessed

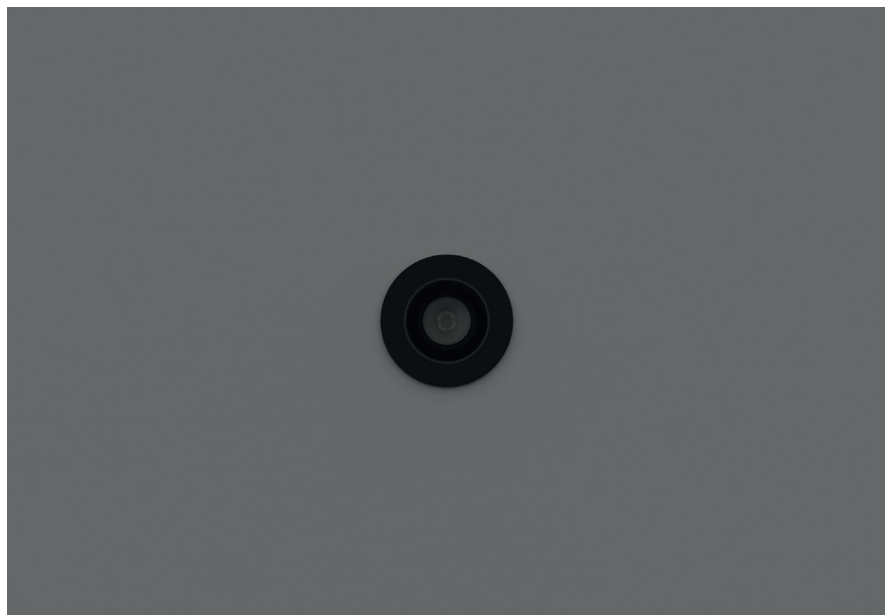

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-TD-75	on-off/DALI	12W	370LM	90	220V	Ø83 x 70mm






NMW-TD-90




Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

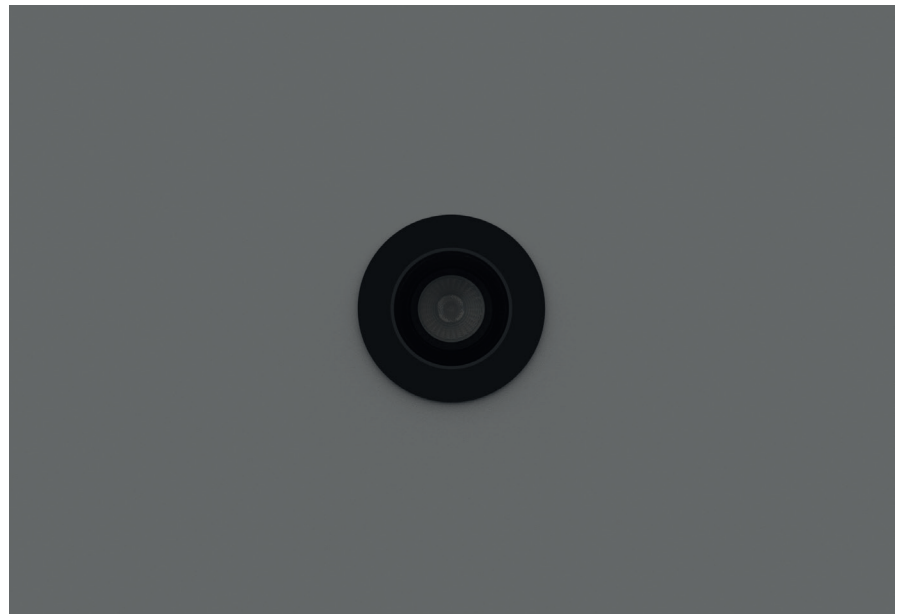

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-TD-90	on-off/DALI	20W	3700LM	90	220V	Ø100 x 85mm

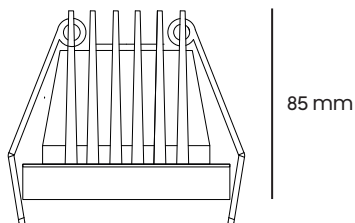



NMW-TD-120

Recessed



Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-TD-120	on-off/DALI	30W	5550LM	90	220V	Ø130 x 100mm



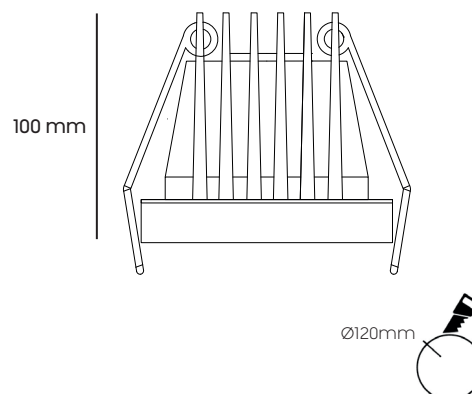
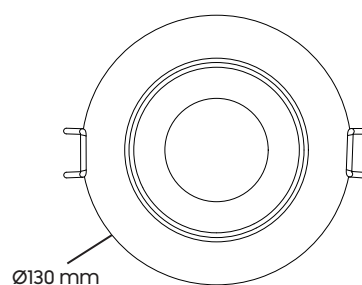


NMW-GSD-R75


Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

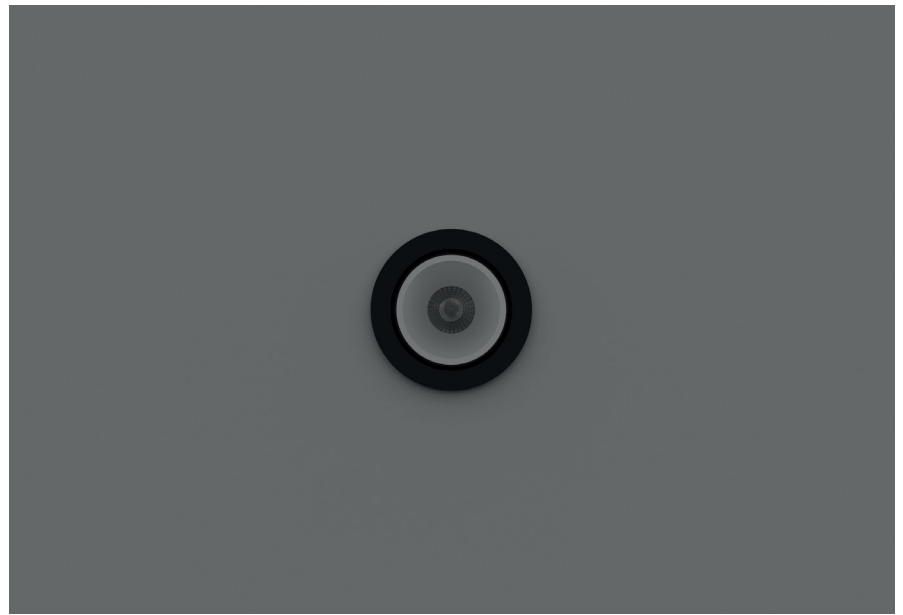


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-GSD-R75	on-off/DALI	7W	1295LM	90	220V	Ø81 x 65.3mm





NMW-GSD-R90

Recessed

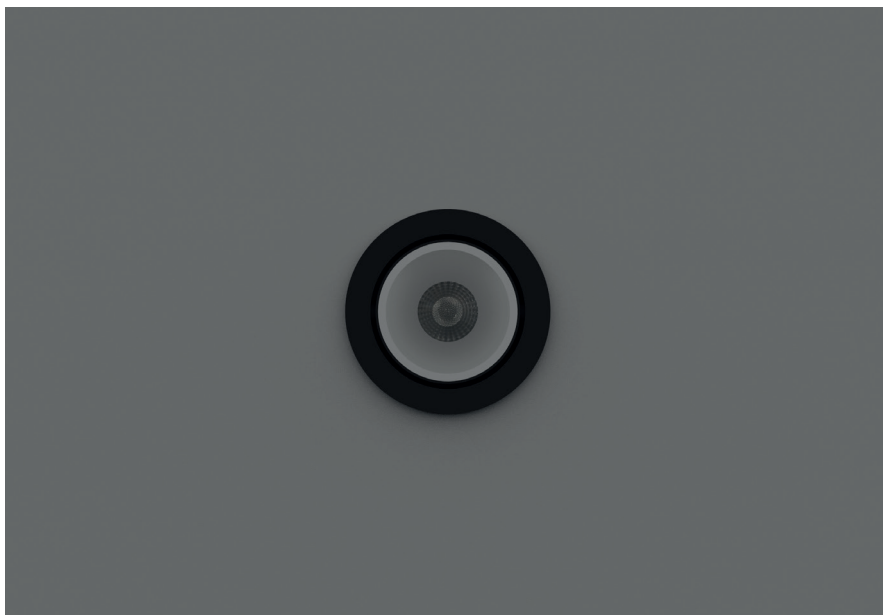

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-GSD-R90	on-off/DALI	12W	2220LM	90	220V	Ø97 x 84.6mm





NMW-GSD-R105



Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-GSD-R105	on-off/DALI	20W	3700LM	90	220V	Ø112 x 100mm

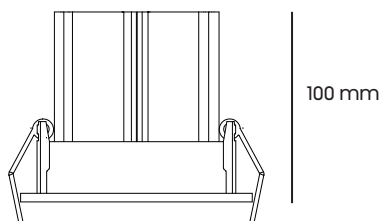



NMW-GSD-R120

Recessed



Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-GSD-R120	on-off/DALI	30W	5550LM	90	220V	Ø129 x 128mm

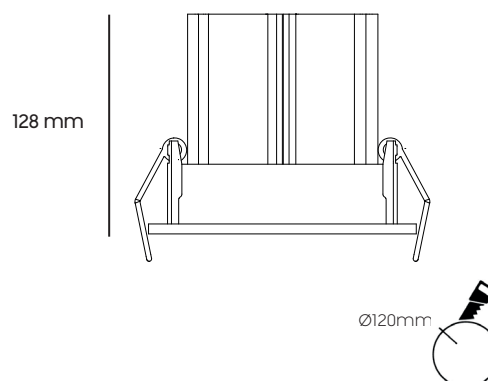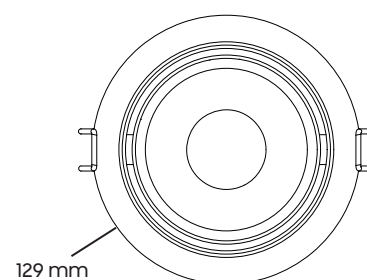


NMW-GSD-S75

Recessed


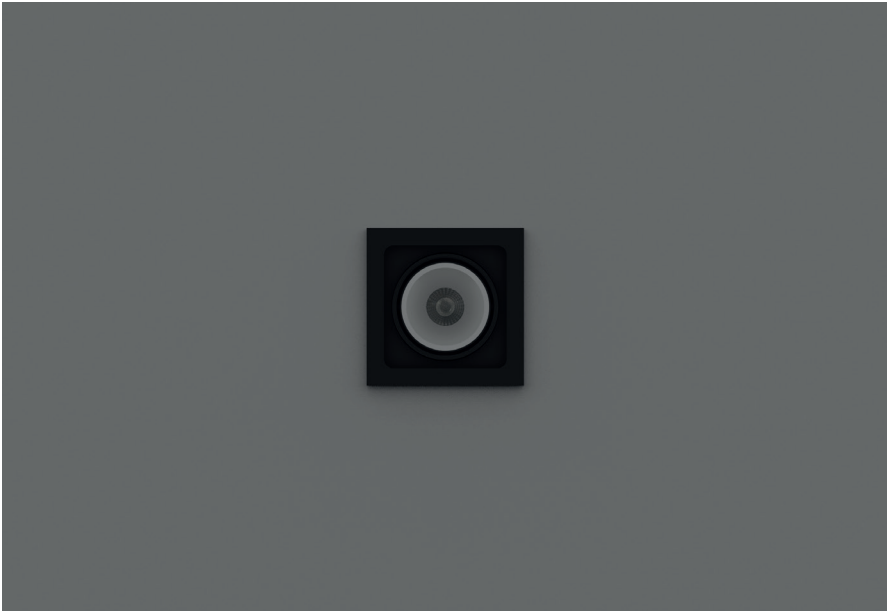


Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

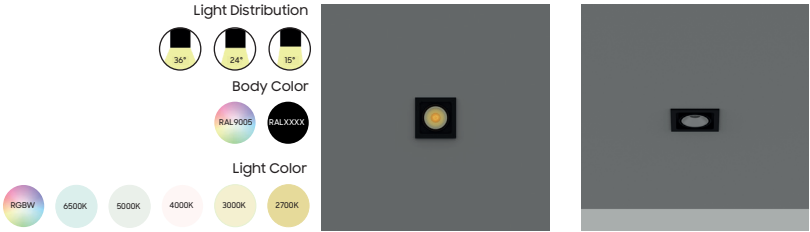


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-GSD-S75	on-off/DALI	7W	1295LM	90	220V	81 x 81 x 65.3mm

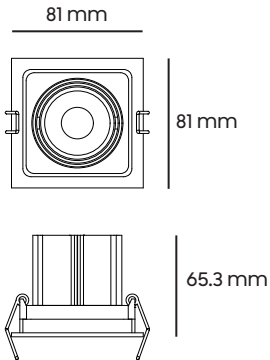



NMW-GSD-S90

Recessed

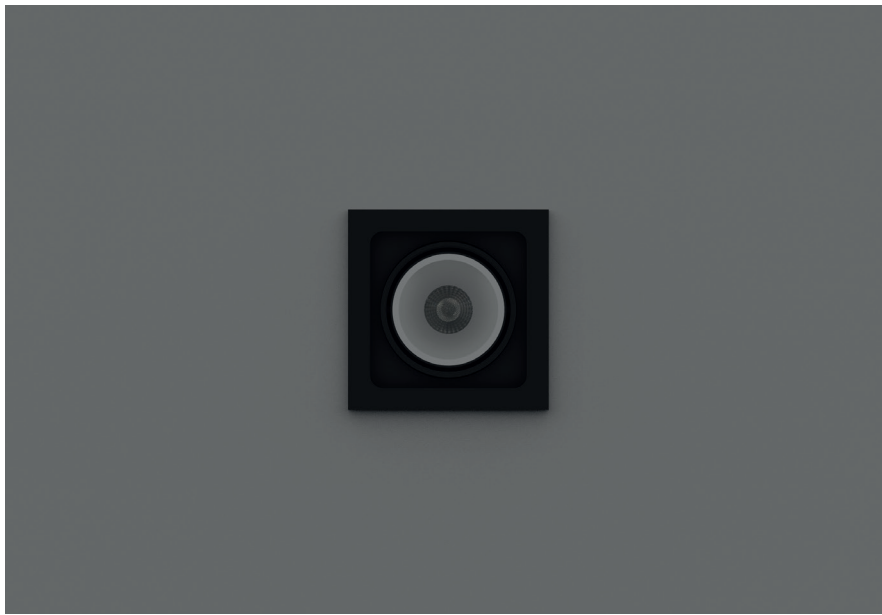

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution






Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-GSD-S90	on-off/DALI	12W	2220LM	90	220V	97 x 97 x 84.6mm





NMW-GSD-S105



Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

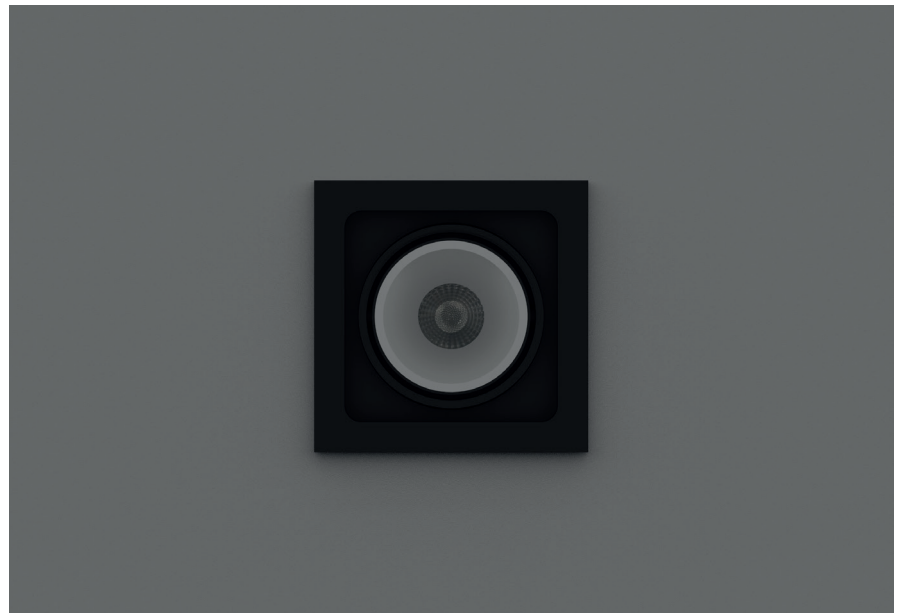

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-GSD-S105	on-off/DALI	20W	3700LM	90	220V	112 x 112 x 100mm

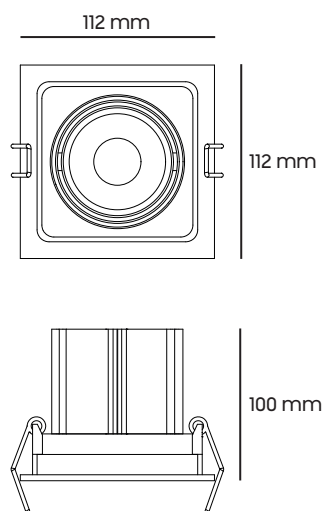


NMW-GSD-S120

Recessed



Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution






Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-GSD-S120	on-off/DALI	30W	5550LM	90	220V	129 x 129 x 128mm

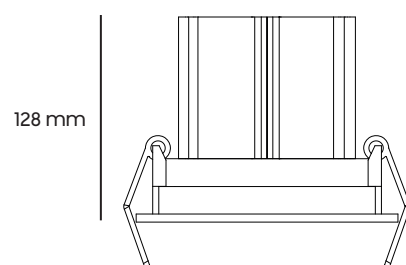
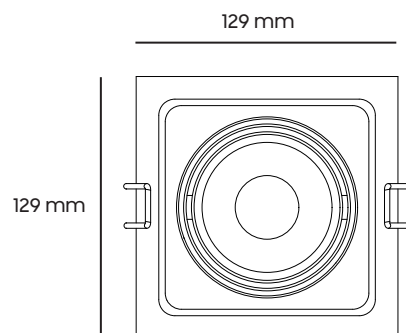


NMW-GSD-S75-2



Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

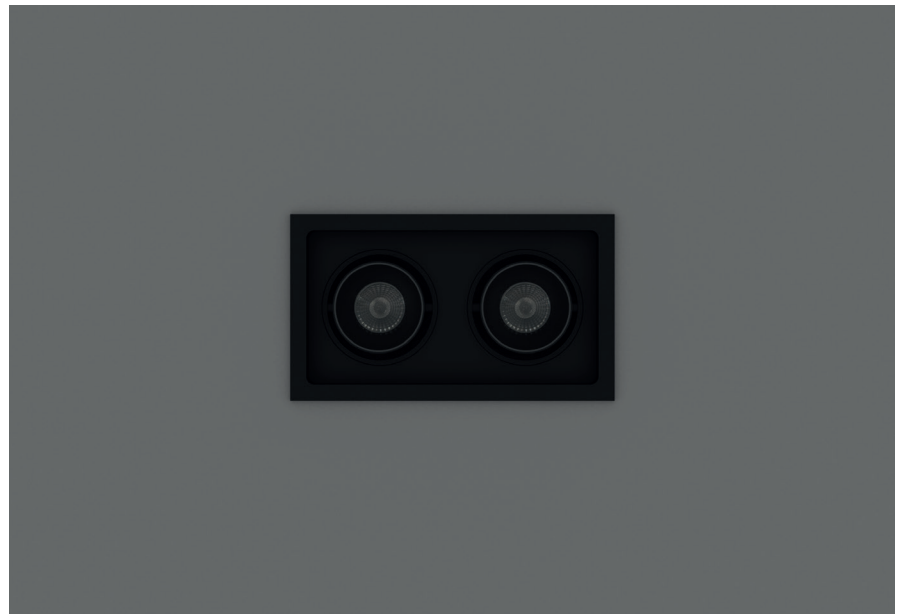


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-GSD-S75-2	on-off/DALI	2 x 7W	2 x 1295LM	90	220V	157 x 81 x 85.8mm

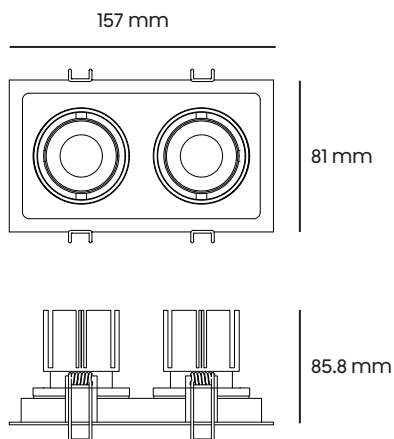


NMW-GSD-S90-2

Recessed

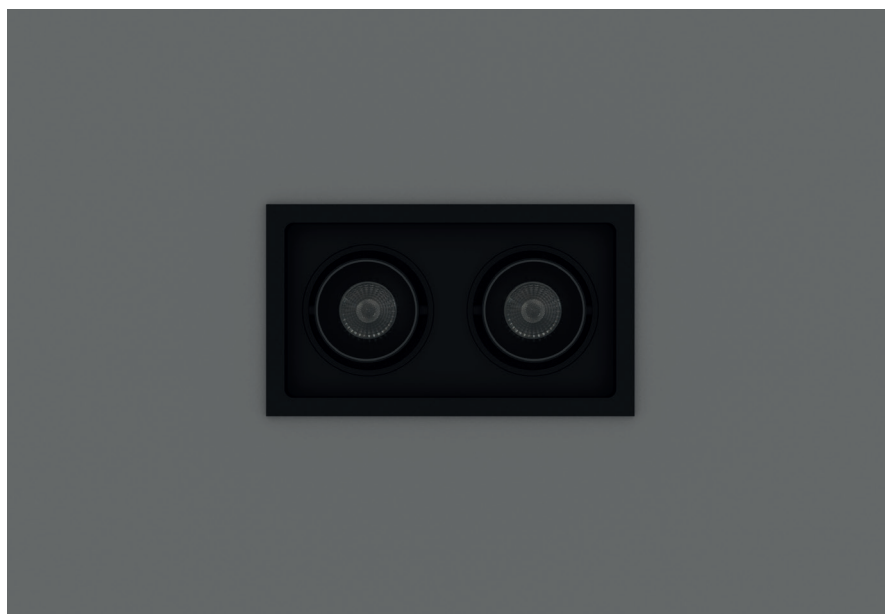

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-GSD-S90-2	on-off/DALI	2 x 12W	2 x 2220LM	90	220V	189 x 87 x 84.6mm

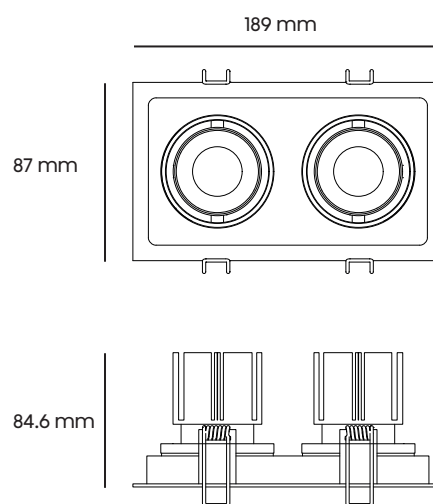


NMW-GSD-S105-2

Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

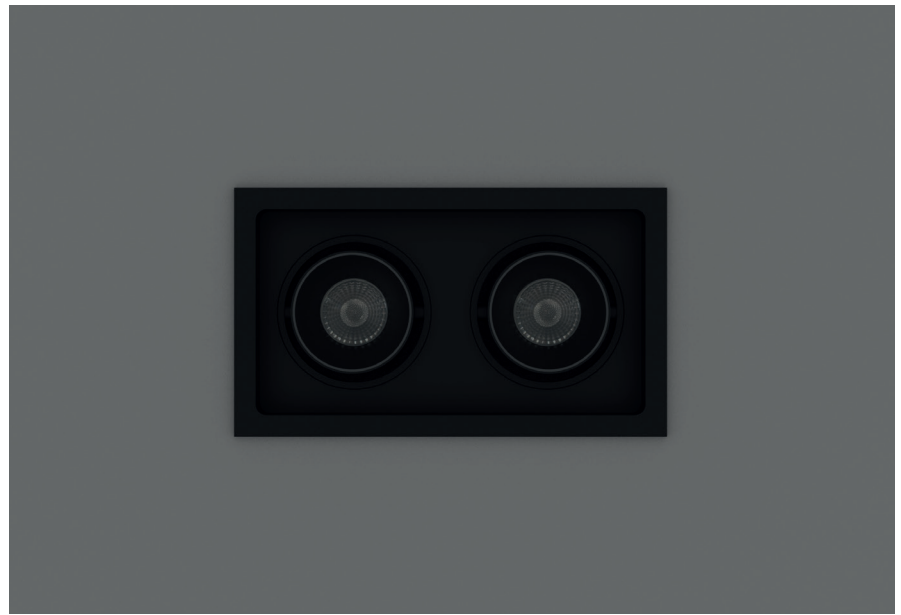


Light Distribution






Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-GSD-S105-2	on-off/DALI	2 x 20W	2 x 3700LM	90	220V	226 x 112 x 100mm

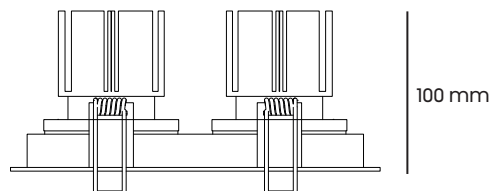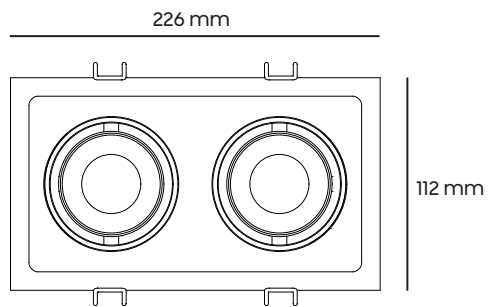


NMW-GSD-S120-2

Recessed



Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-GSD-S120-2	on-off/DALI	2 x 30W	2 x 5550LM	90	220V	269 x 129 x 128mm

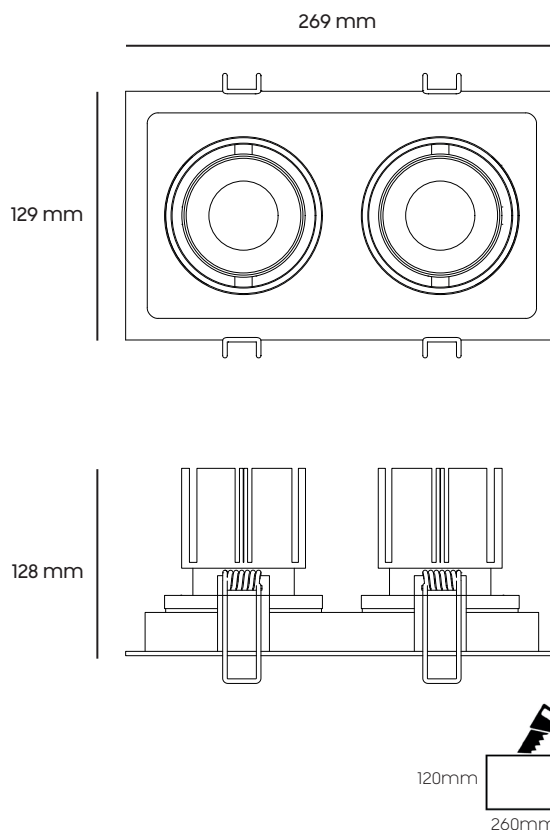


AW-XTD-A-01

Recessed


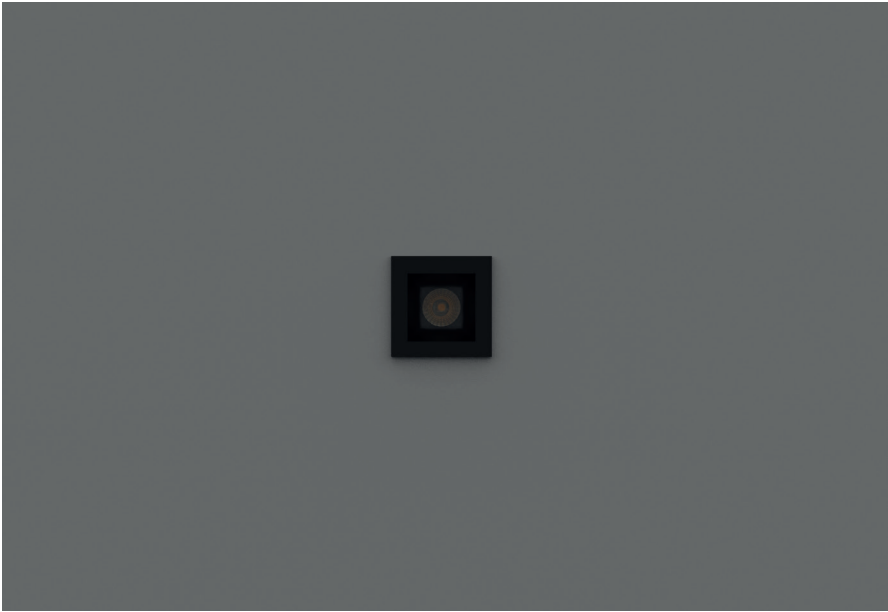


Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

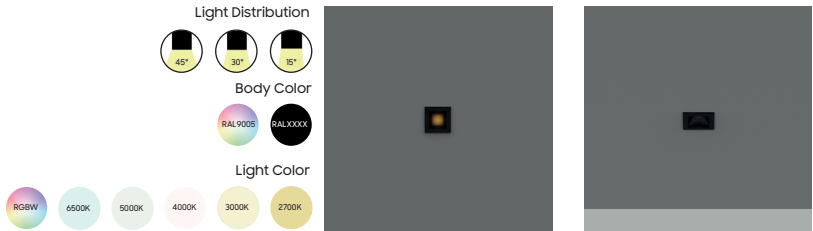


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD-A-01	on-off/DALI	3W	555LM	90	220V	45 x 45 x 49mm





AW-XTD-A-02

Recessed

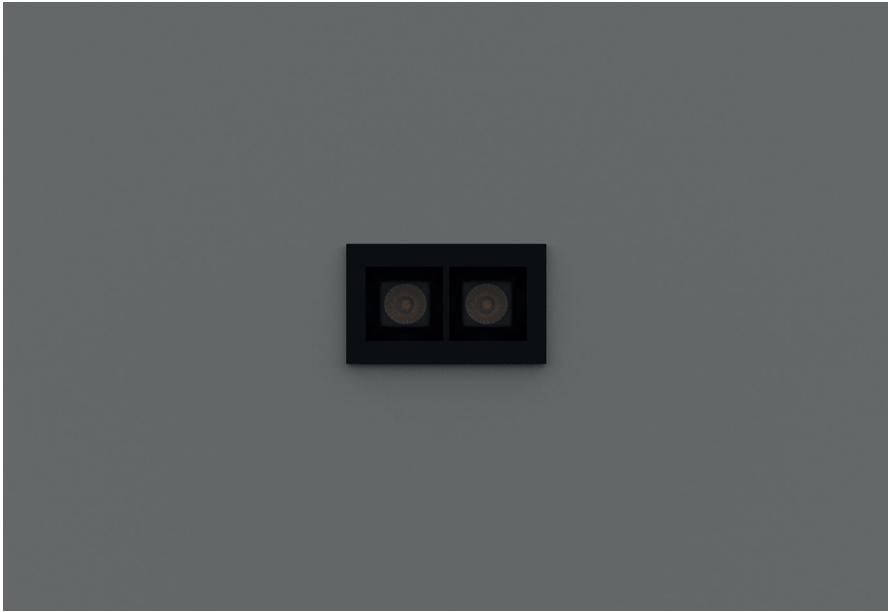

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

15° 30° 45°



Body Color

RAL9005 RAL9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD-A-02	on-off/DALI	5W	925LM	90	220V	75 x 45 x 49mm






AW-XTD-A-03



Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

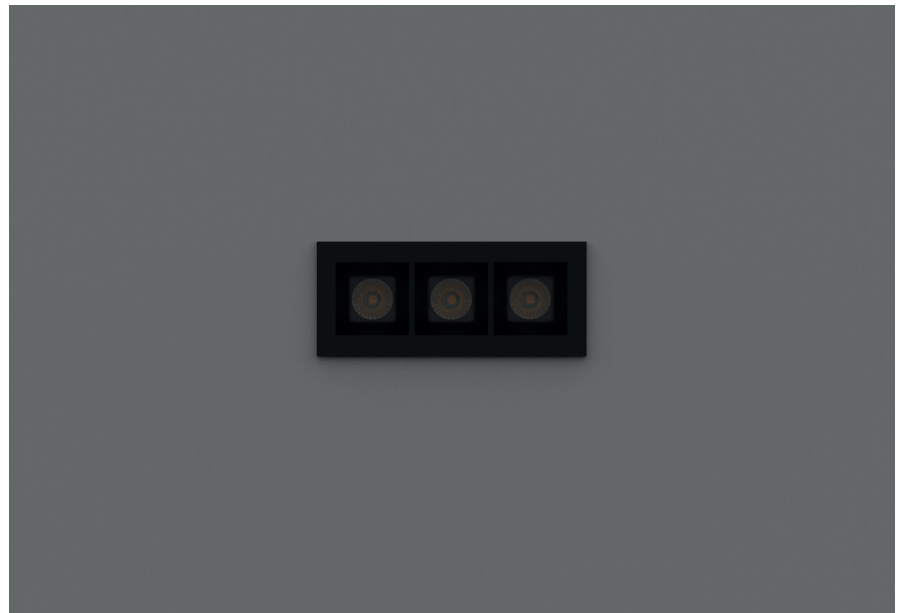


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD-A-03	on-off/DALI	6W	1110LM	90	220V	105.2 x 45 x 49mm


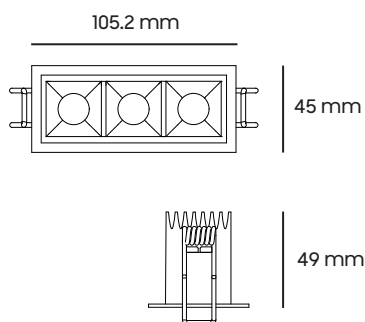


AW-XTD-A-05

Recessed

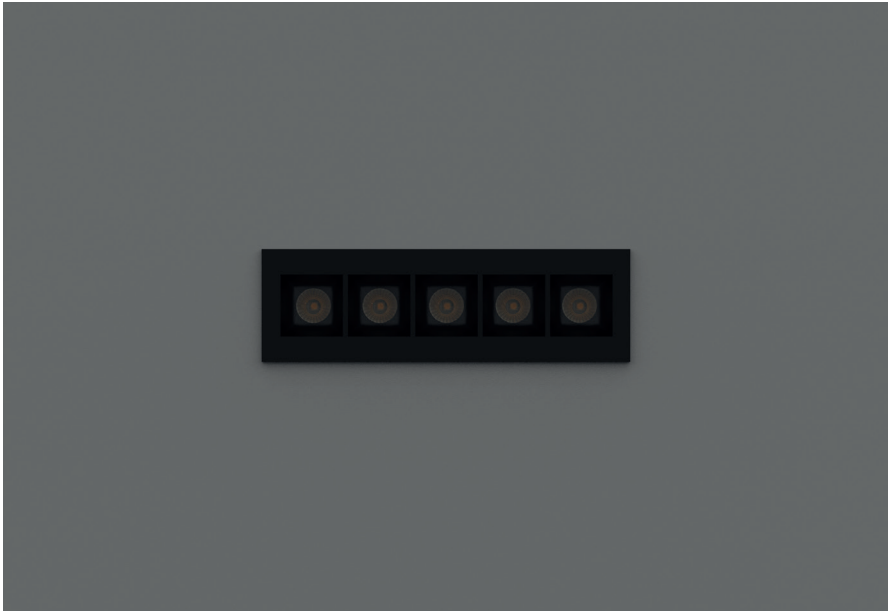

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

15° 30° 45°



Body Color

RAL9005 RAL9005

Light Color


2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD-A-05	on-off/DALI	12W	2220LM	90	220V	147 x 45 x 49mm

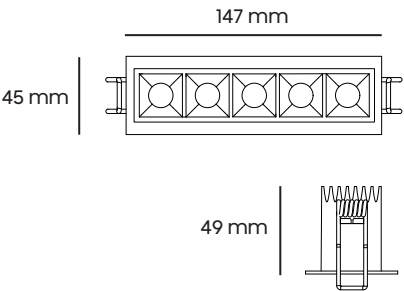

AW-XTD-A-10

Recessed

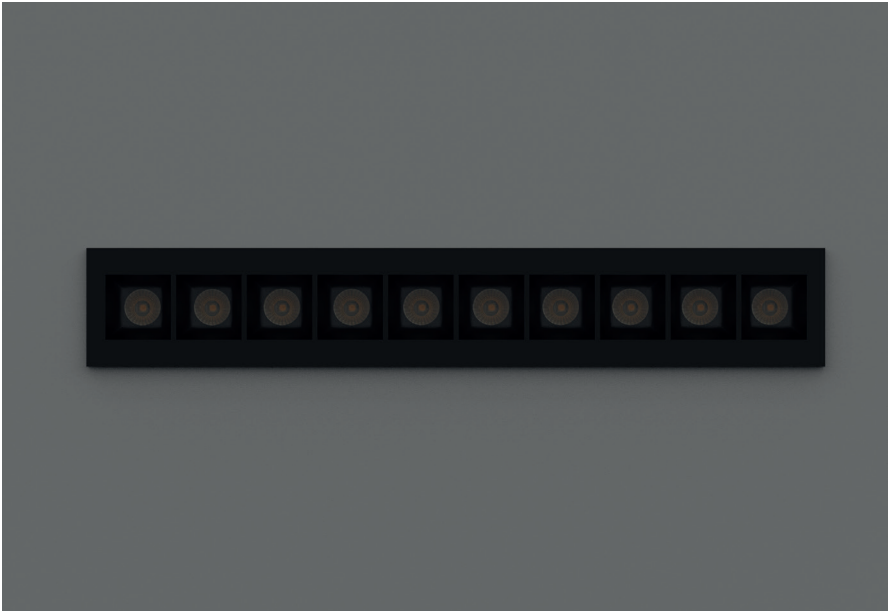

Quick Info



Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

Light Distribution

Body Color


Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD-A-10	on-off/DALI	20W	3700LM	90	220V	280 x 45 x 49 mm

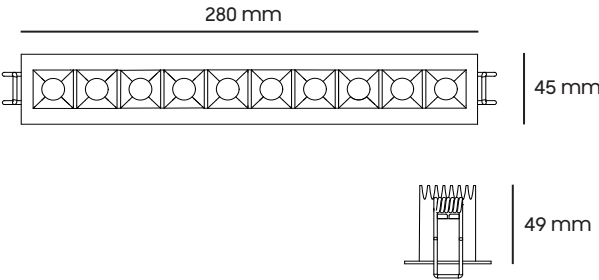

AW-XTD-A-15

Recessed

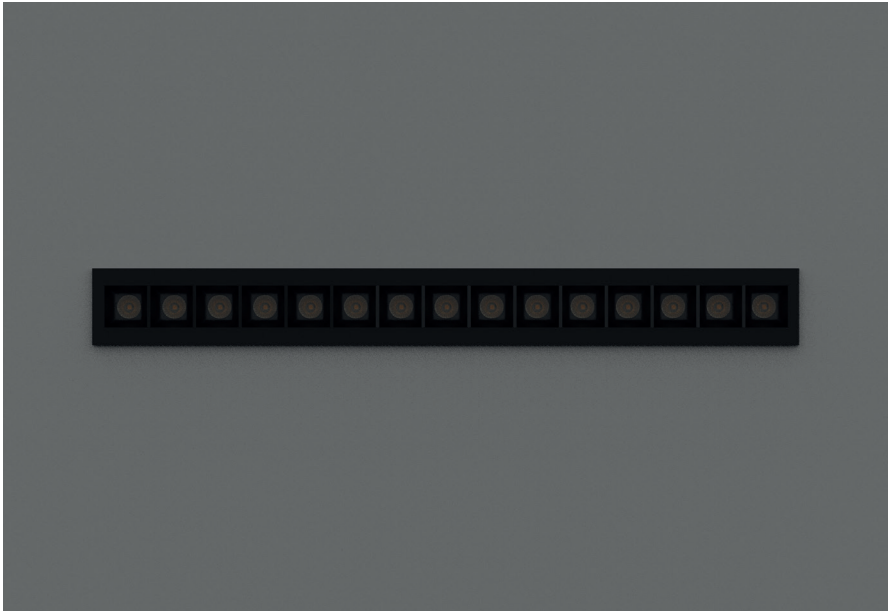

Quick Info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

Light Distribution

15° 30° 45°



Body Color

RAL9005 RAL9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD-A-15	on-off/DALI	30W	5550LM	90	220V	413 x 45 x 49mm



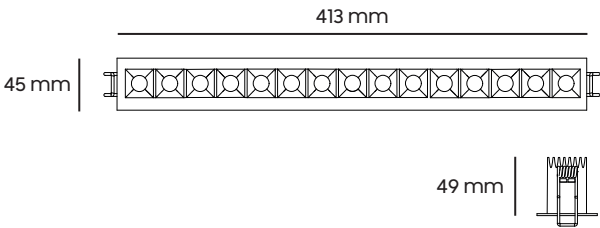


AW-XTD-A-04



Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

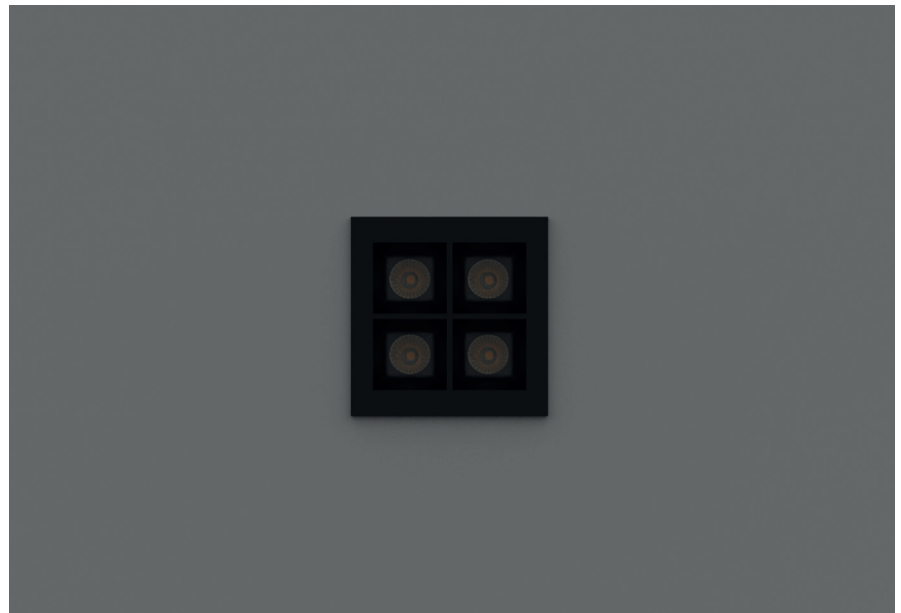


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD-A-04	on-off/DALI	8W	1480LM	90	220V	74.8 x 74.8 x 50mm





AW-XTD-A-09

Recessed

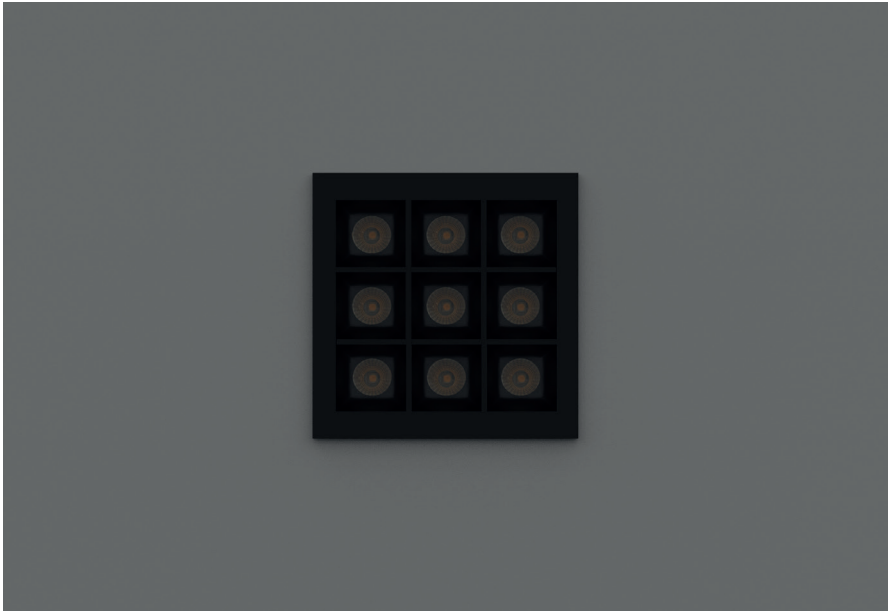

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

15° 30° 45°



Body Color

RAL 9005 RAL 9005

Light Color


2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD-A-09	on-off/DALI	18W	3330LM	90	220V	104.8 x 104.8 x 50mm

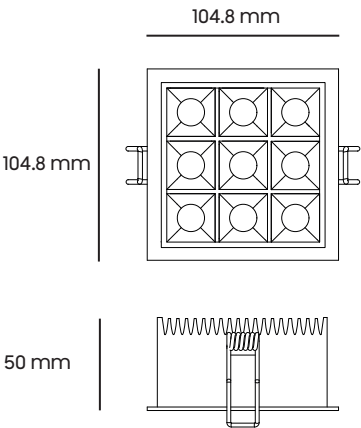

AW-XTD-WW-05

Recessed

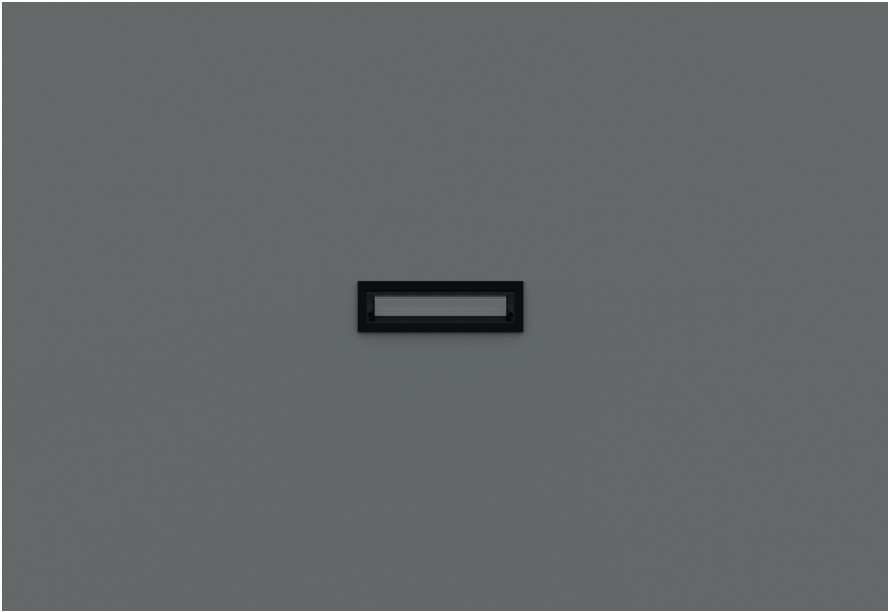

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

Light Distribution



10°

Body Color





Light Color









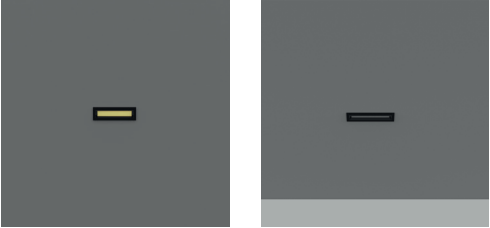



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD-WW-05	on-off/DALI	10W	1850LM	90	220V	147 x 45 x 54mm


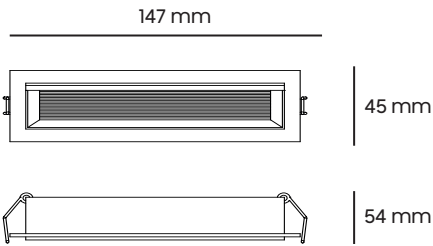


AW-XTD-WW-10

Recessed

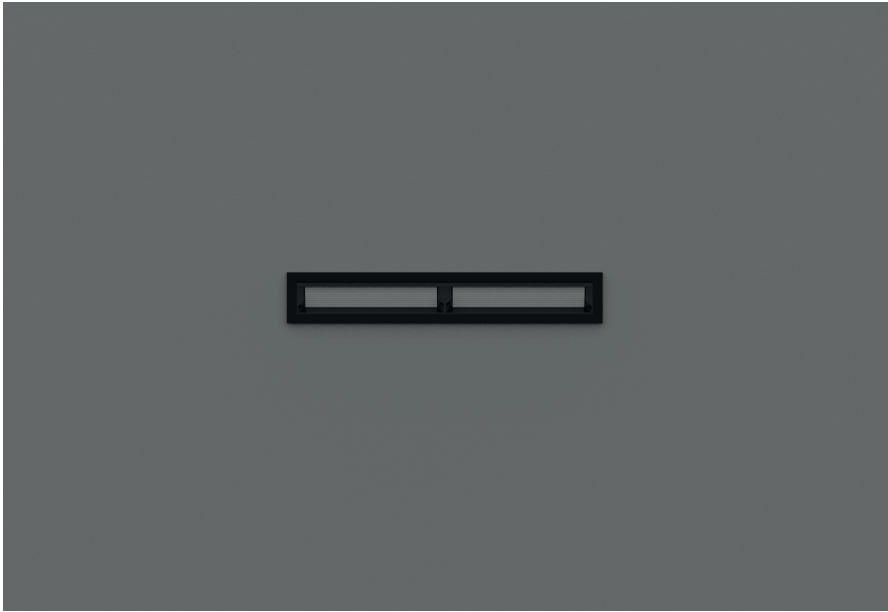

Quick Info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9





Light Distribution

Body Color


Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD-WW-10	on-off/DALI	20W	3700LM	90	220V	280 x 45 x 54mm

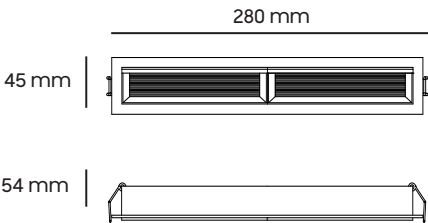

AW-XTD-WW-15

Recessed

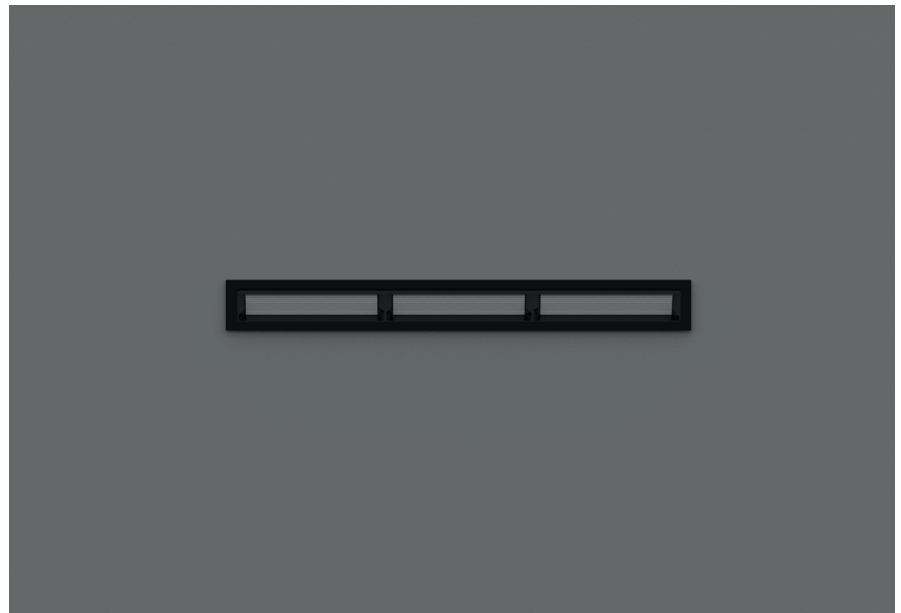

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9


Light Distribution



Body Color




Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD-WW-15	on-off/DALI	30W	5550LM	90	220V	413 x 45 x 54 mm


413 mm



45 mm




54 mm





AW-XTD-70-01

Recessed

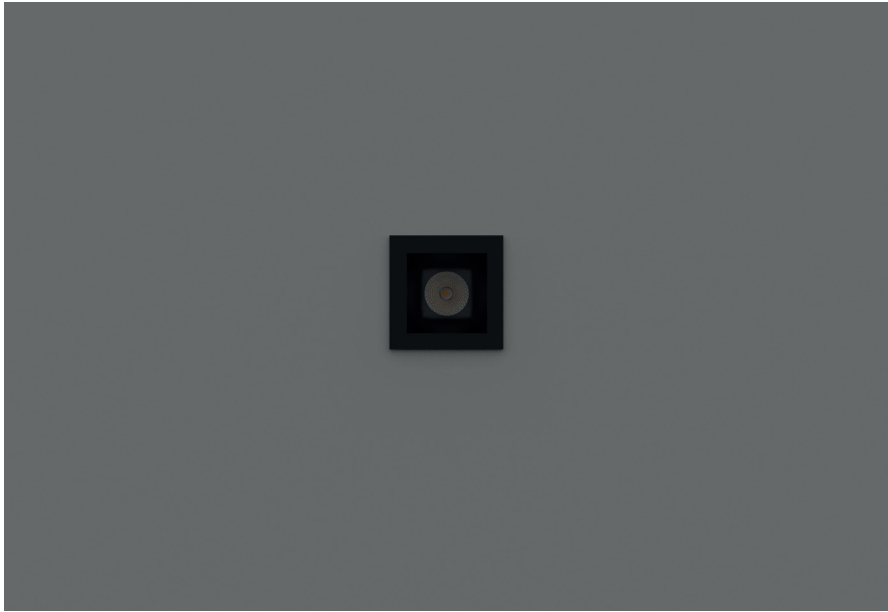

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

15° 30° 45°



Body Color

RAL 9005 RAL 9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD-70-01	on-off/DALI	10W	1850LM	90	220V	97 x 97 x 86mm



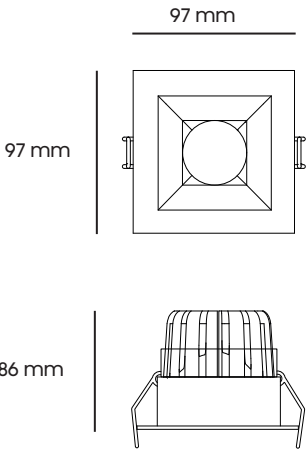


AW-XTD-70-02



Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

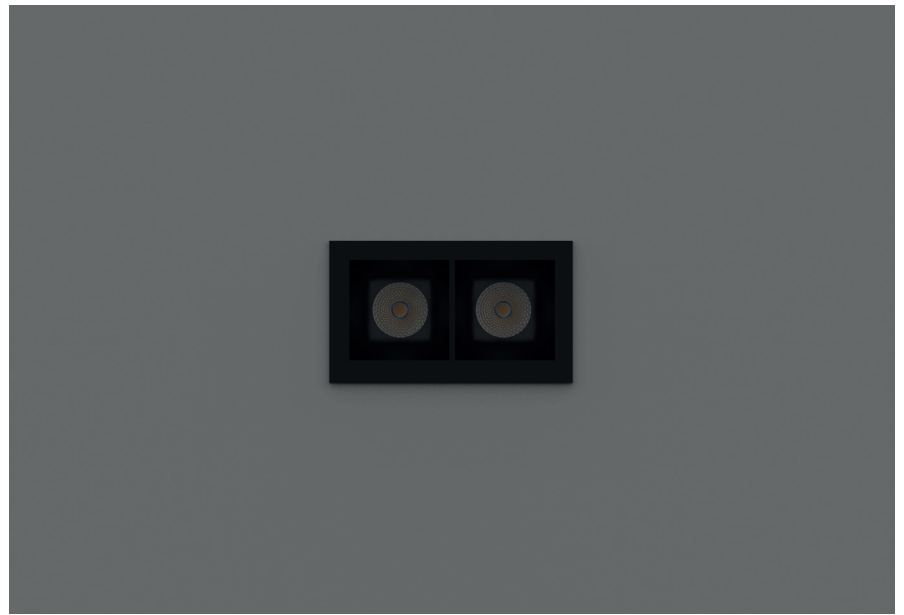


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD-70-02	on-off/DALI	20W	3700LM	90	220V	166 x 97 x 86mm

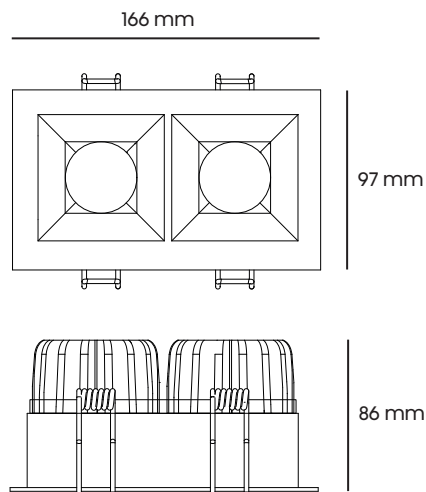



AW-XTD-70-03

Recessed

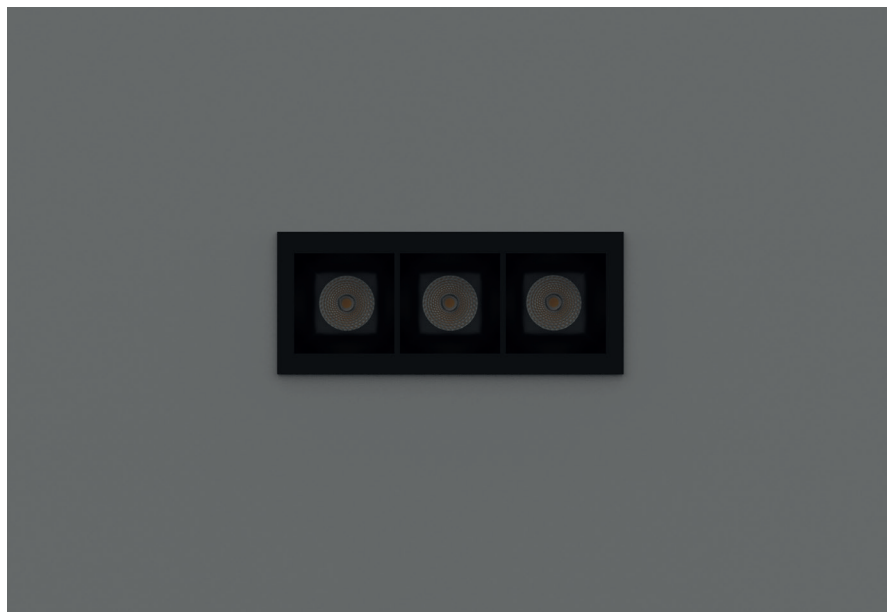

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD-70-03	on-off/DALI	30W	5550LM	90	220V	236 x 97 x 86mm

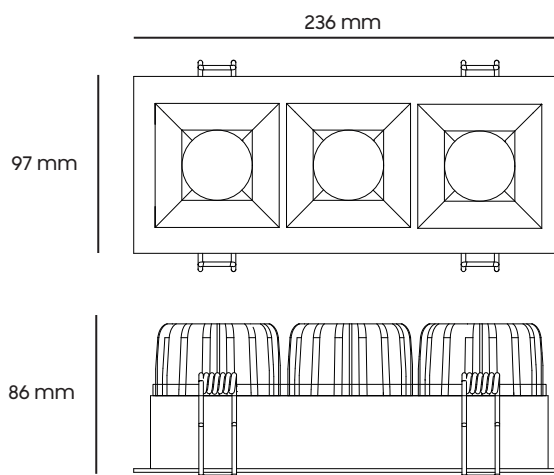


TSD009-25

Recessed

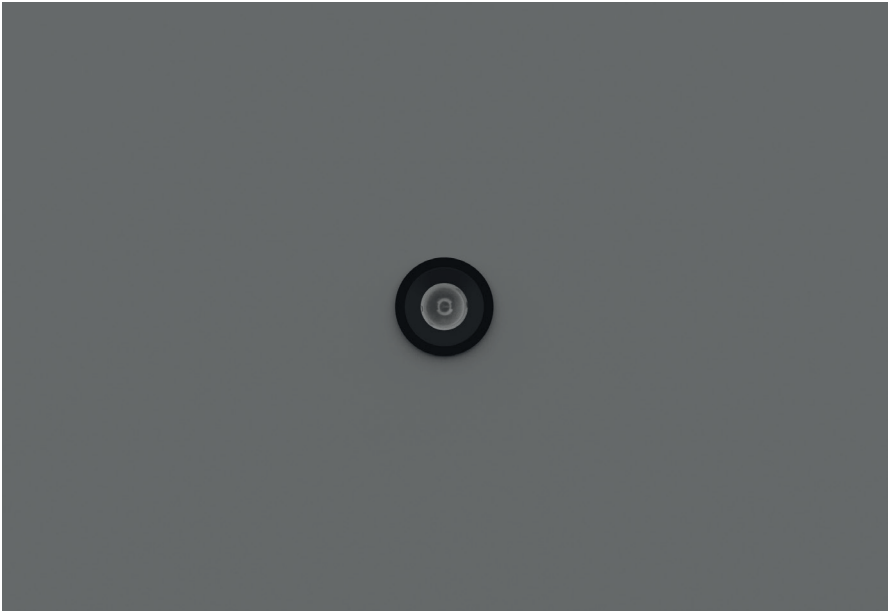


Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

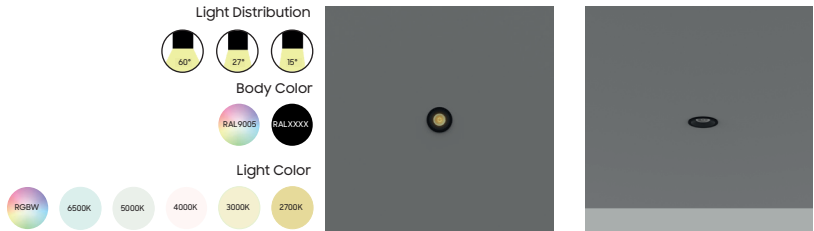


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
TSD009-25	on-off/DALI	1.5W	2775LM	90	220V	Ø30 x 24mm




TSD009-35

Recessed

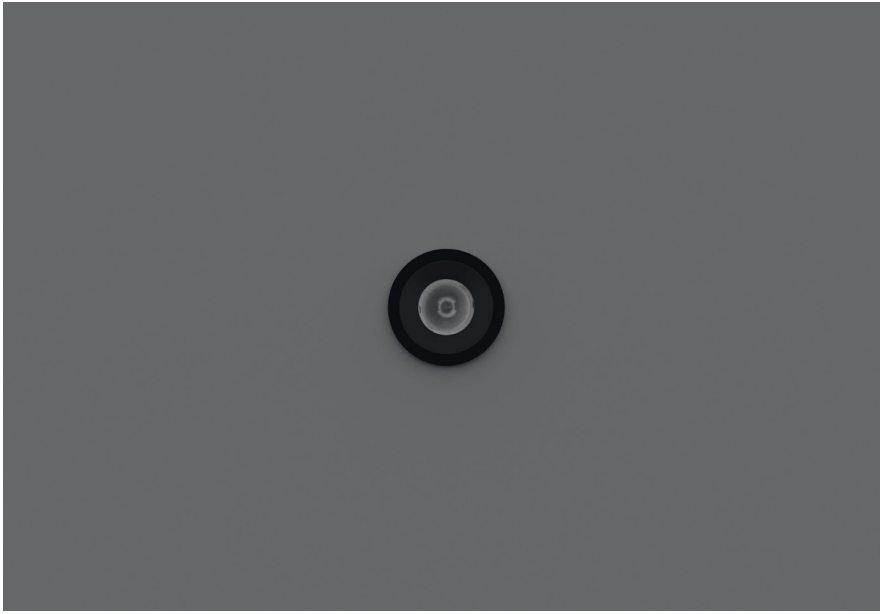

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
TSD009-35	on-off/DALI	2.5W	462.5LM	90	220V	Ø40 x 30.8mm




TSD009-50

Recessed


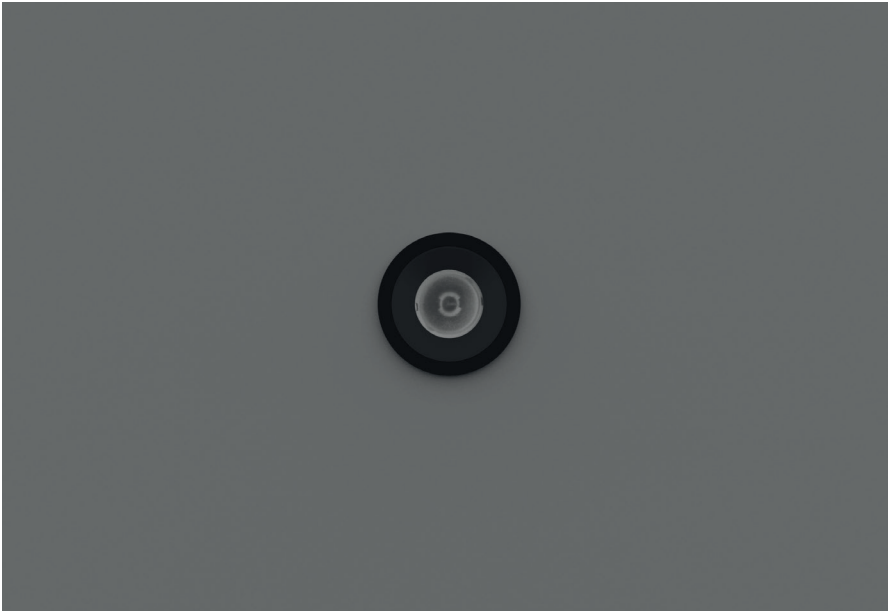


Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

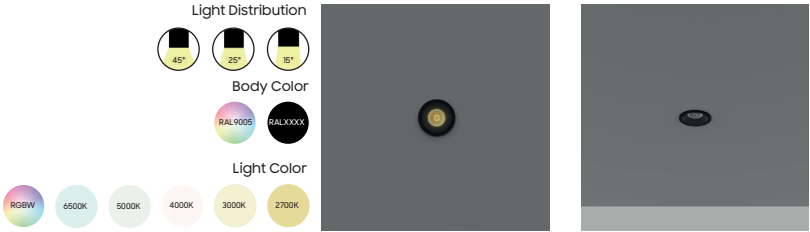


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
TSD009-50	on-off/DALI	4W	740LM	90	220V	Ø55 x 51.4mm

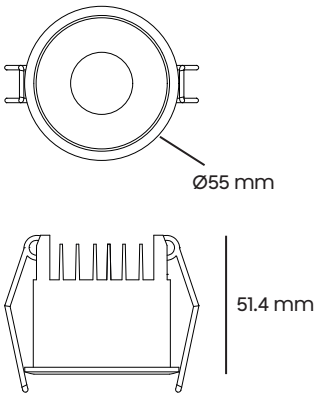



TSD009-60

Recessed

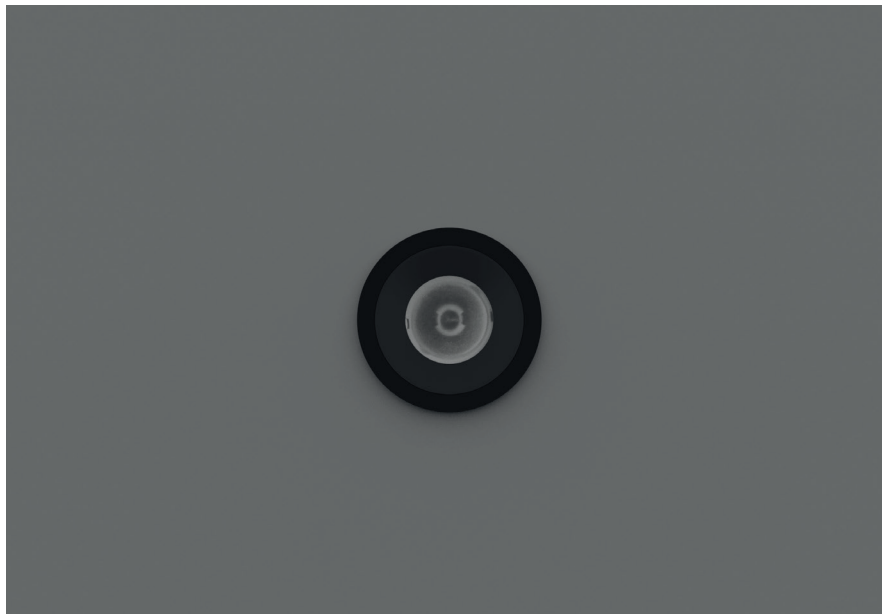

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
TSD009-60	on-off/DALI	8W	1480LM	90	220V	Ø65 x 61.7mm

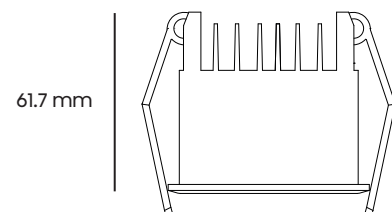



TSD009-70

Recessed

Quick Info


Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

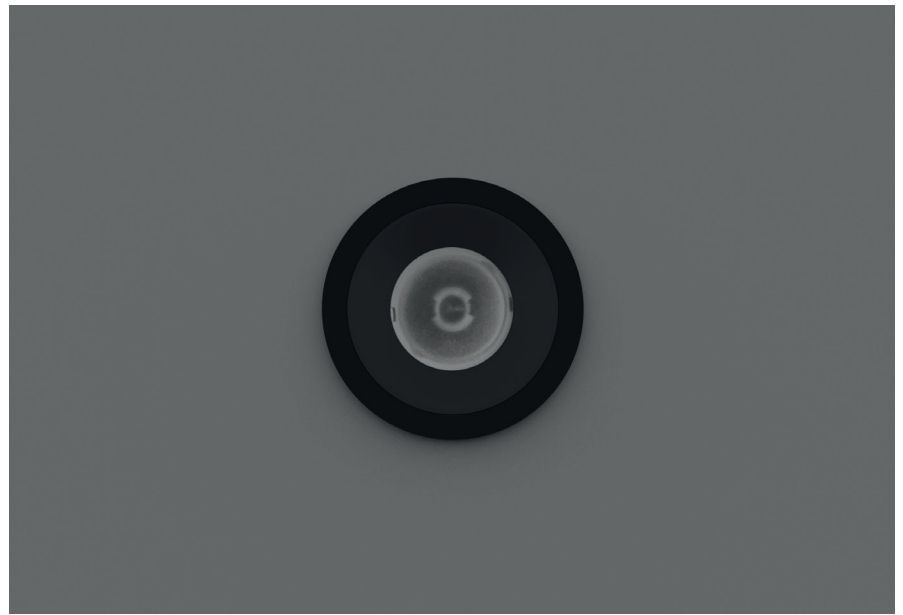



Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
TSD009-70	on-off/DALI	12W	2220LM	90	220V	Ø75 x 70mm

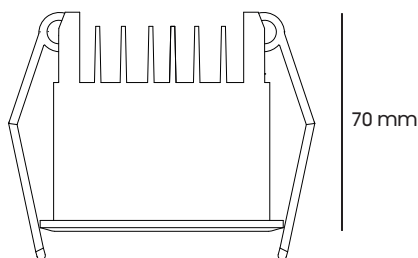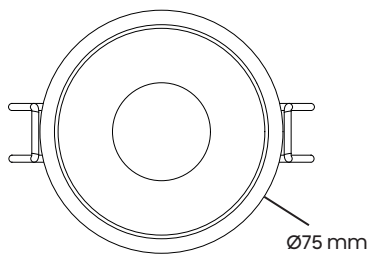


AW-TD055-2.5F

Recessed

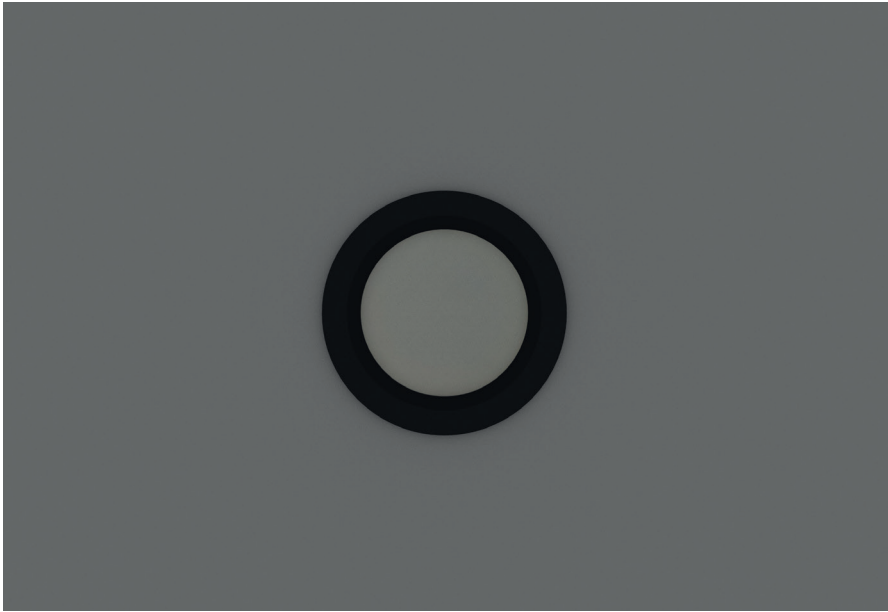

Quick Info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9




Light Distribution

Body Color


Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-TD055-2.5F	on-off/DALI	3W	555LM	90	220V	Ø98 x 56mm



AW-TD055-3F

Recessed

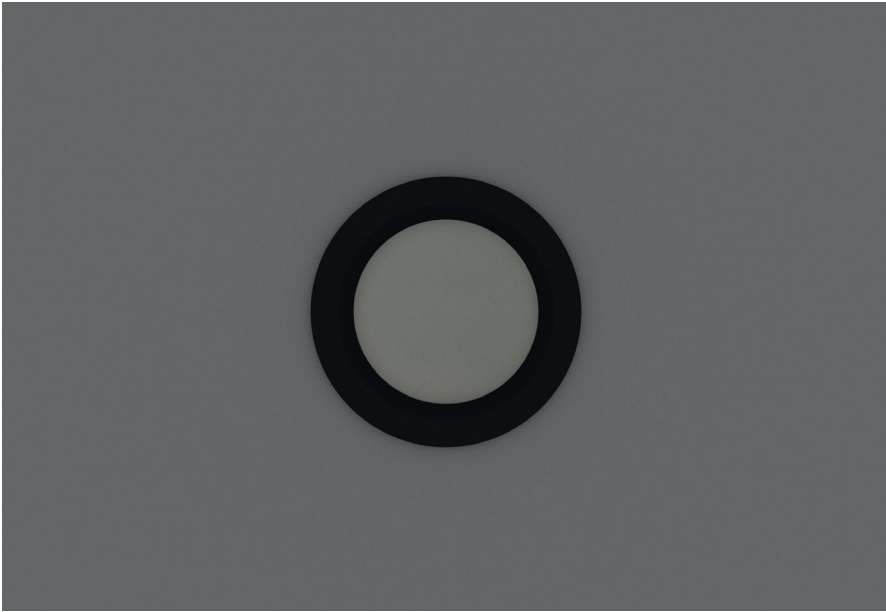

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

Light Distribution

120°



Body Color

RAL 9005 RAL X000

Light Color


RGBW 6500K 5000K 4000K 3000K 2700K

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-TD055-3F	on-off/DALI	5W	925LM	90	220V	Ø108 x 56mm




AW-TD055-3.5F

Recessed

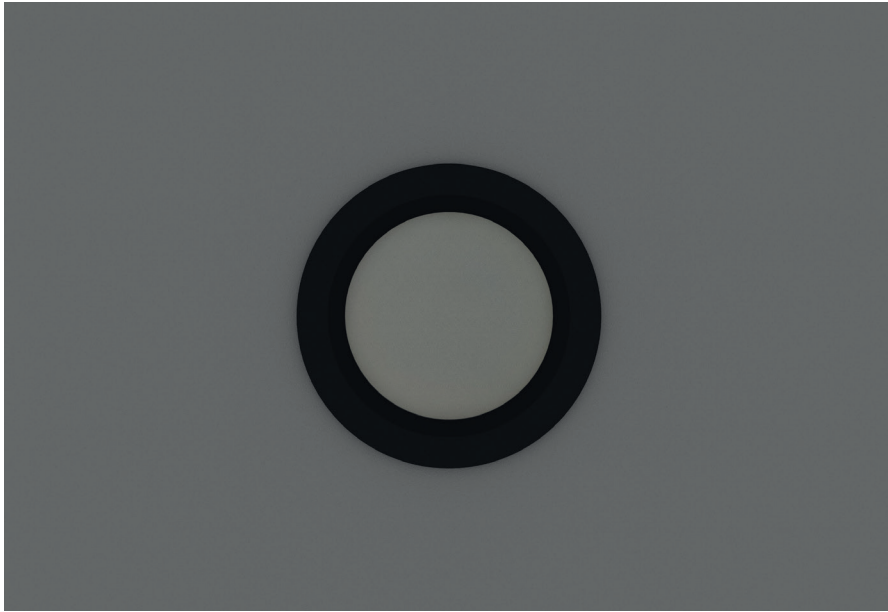

Quick Info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9




Light Distribution

Body Color


Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-TD055-3.5F	on-off/DALI	7W	1295LM	90	220V	Ø118 x 56mm

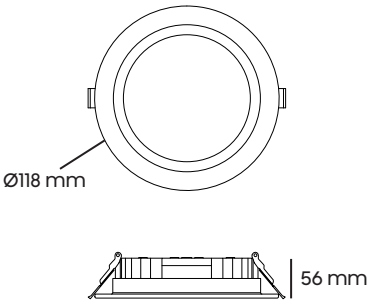

AW-TD055-4F

Recessed

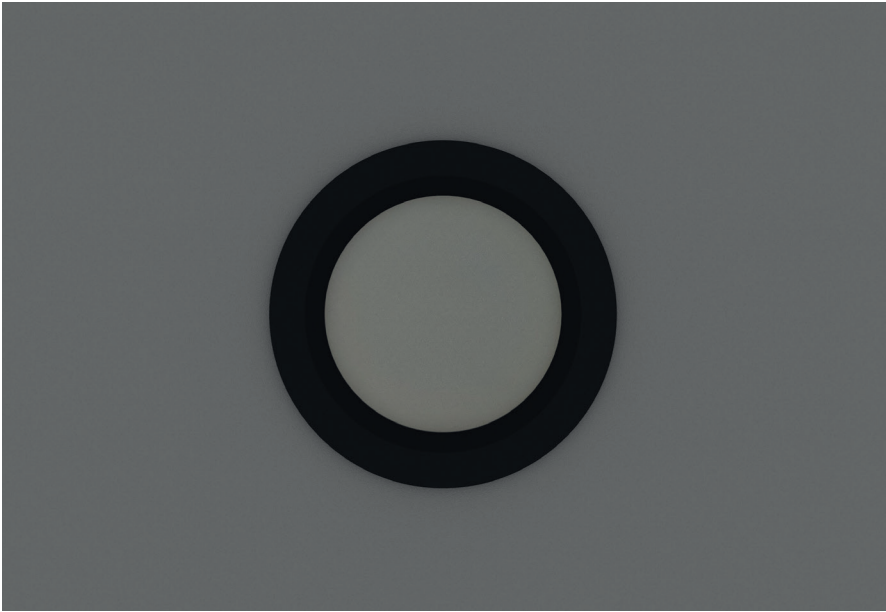

Quick Info


Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

Light Distribution

Body Color

Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-TD055-4F	on-off/DALI	9W	1665LM	90	220V	Ø138 x 56mm

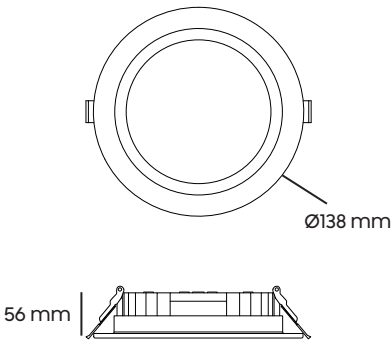



AW-TD055-5F

Recessed



Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution





Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-TD055-5F	on-off/DALI	12W	2220LM	90	220V	Ø180 x 56mm

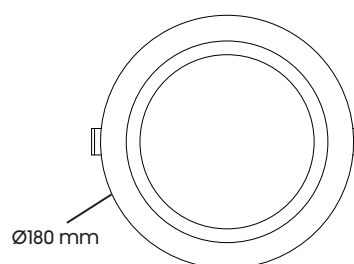

AW-TD055-6F

Recessed

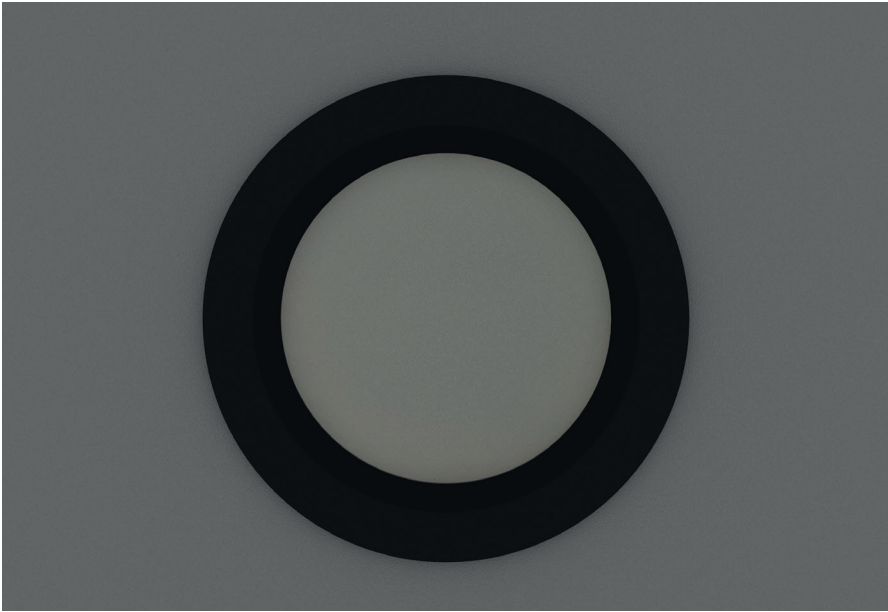

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

Light Distribution

120°




Body Color

RAL 9005 RAL 3000

Light Color

RGBW 6500K 5000K 4000K 3000K 2700K

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-TD055-6F	on-off/DALI	20W	3700LM	90	220V	Ø188 x 56mm

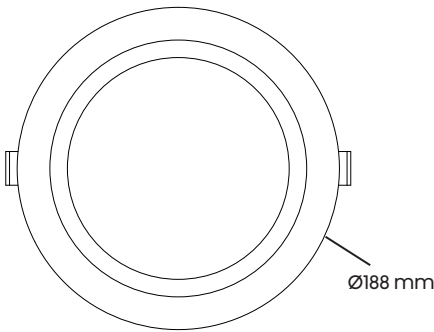


AW-TD055-8F

Recessed



Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-TD055-8F	on-off/DALI	30W	5550LM	90	220V	Ø240 x 56mm

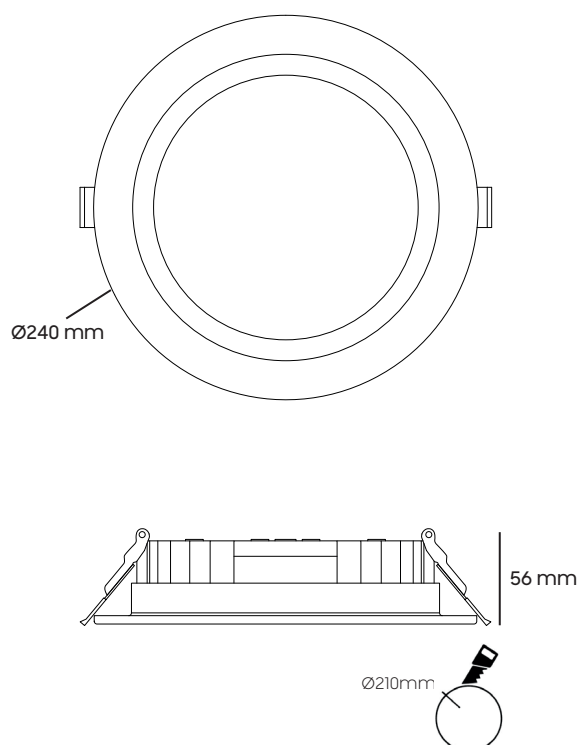




NMW-O55

Semi-Flush


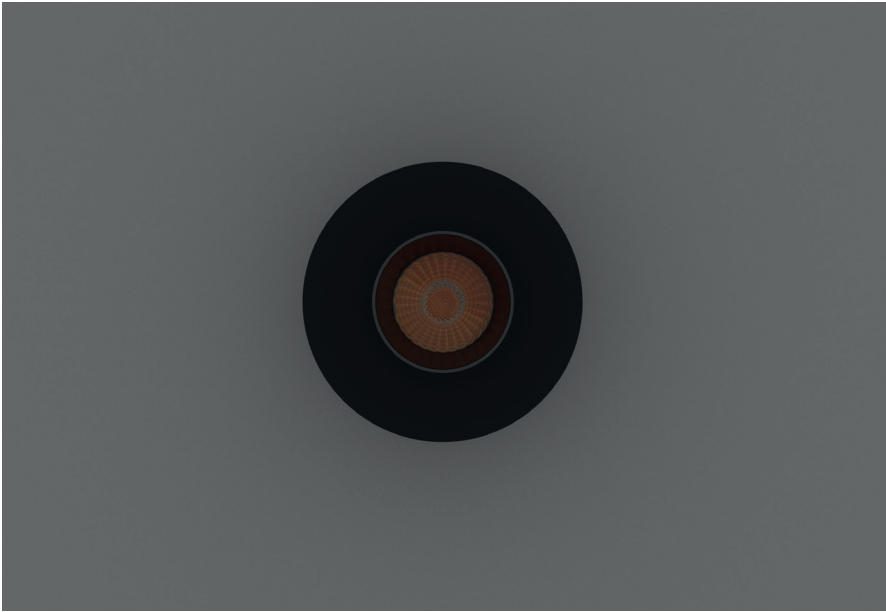


Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-O55	on-off/DALI	7W	1295LM	90	220V	Ø65 x 44.8mm

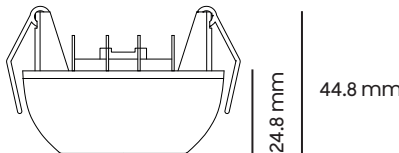


NMW-O75

Semi-Flush

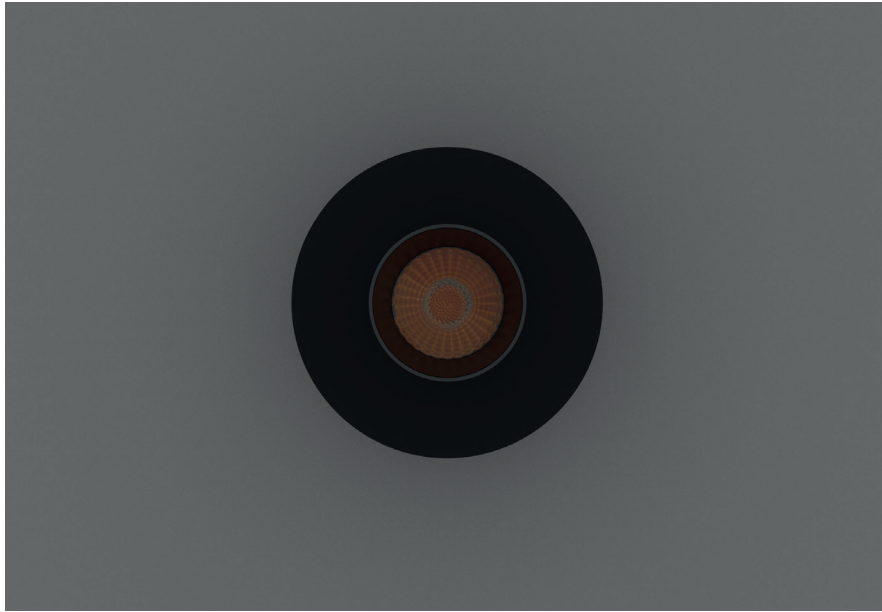

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-O75	on-off/DALI	12W	2220LM	90	220V	Ø85 x 58mm

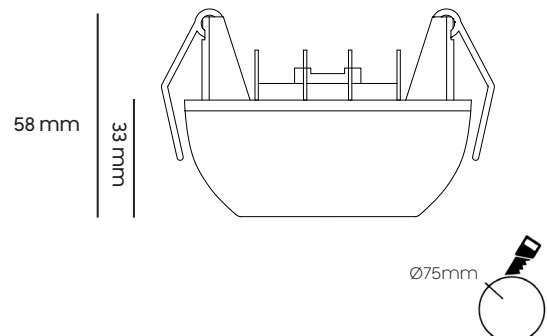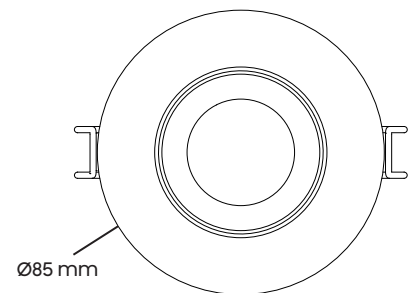


NMW-R55

Semi-Flush


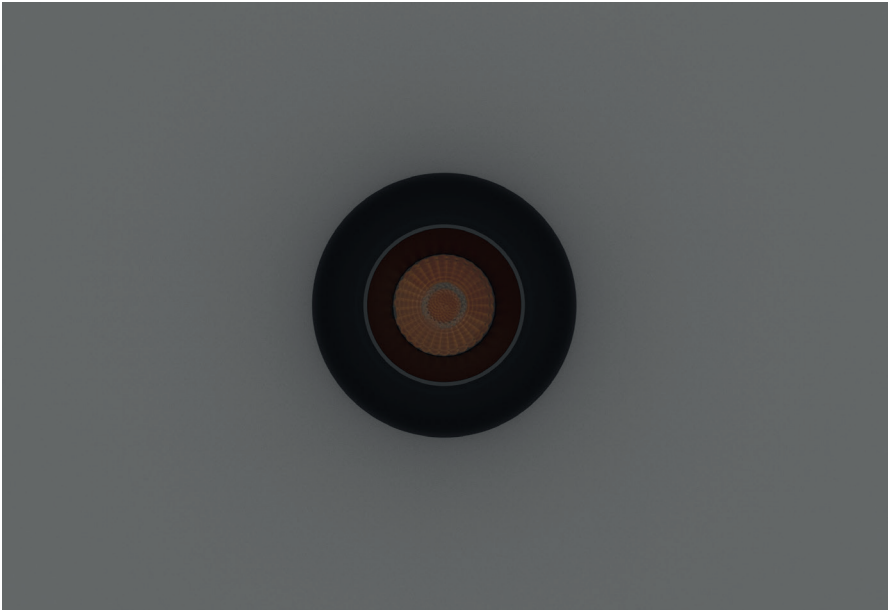


Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-R55	on-off/DALI	7W	1295LM	90	220V	Ø85 x 65mm

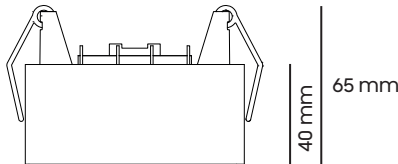


NMW-R75

Semi-Flush

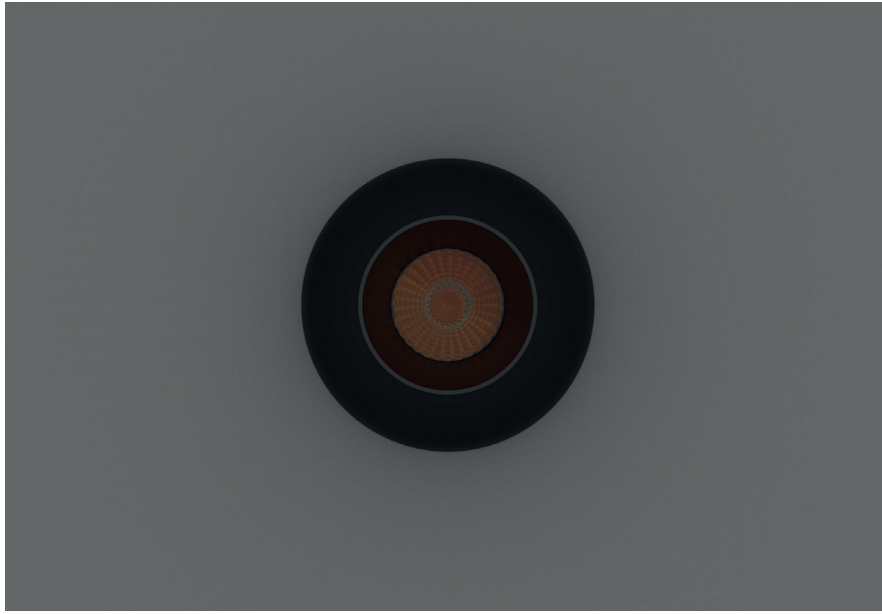

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-R75	on-off/DALI	10W	1850LM	90	220V	Ø85 x 65mm

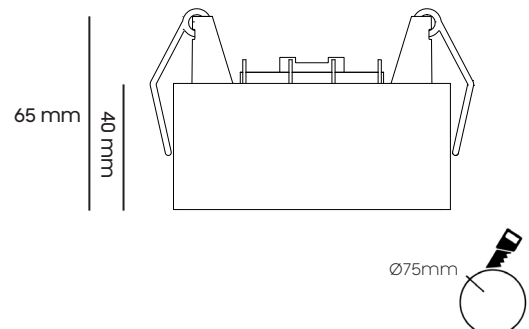
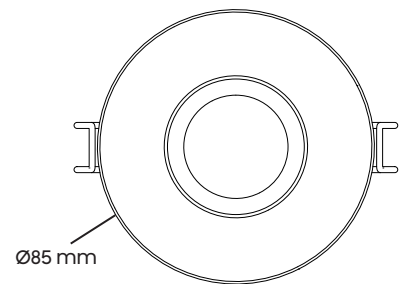


NMW-S55



Semi-Flush

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

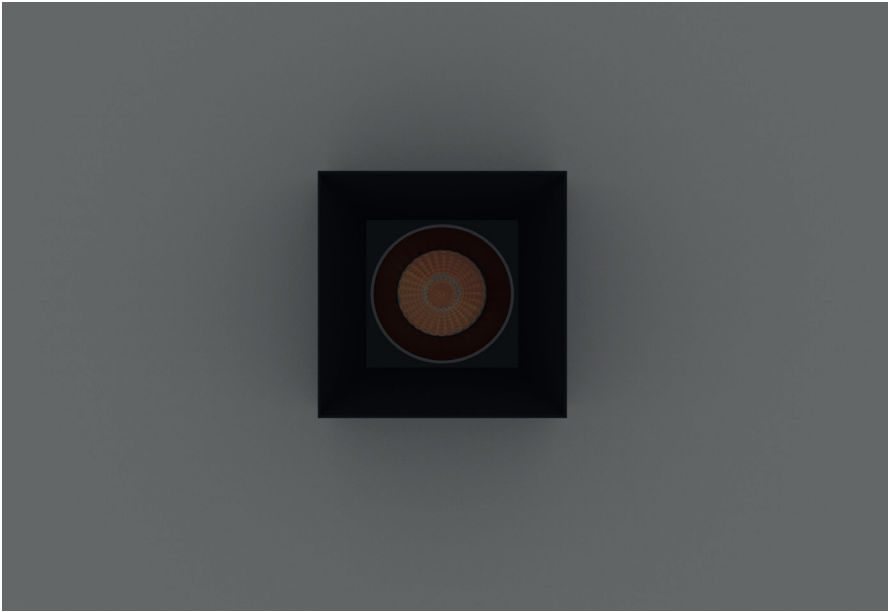


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-S55	on-off/DALI	7W	1295LM	90	220V	65 x 65 x 53.8mm

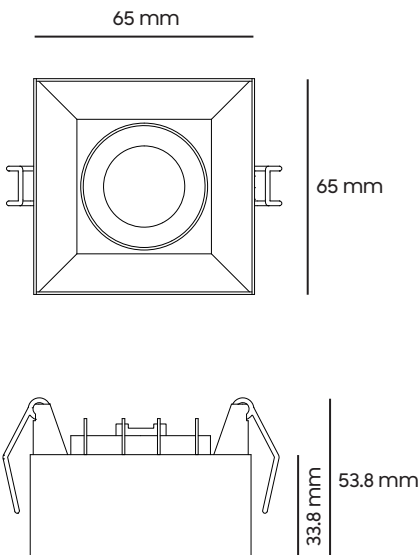


NMW-S75

Semi-Flush

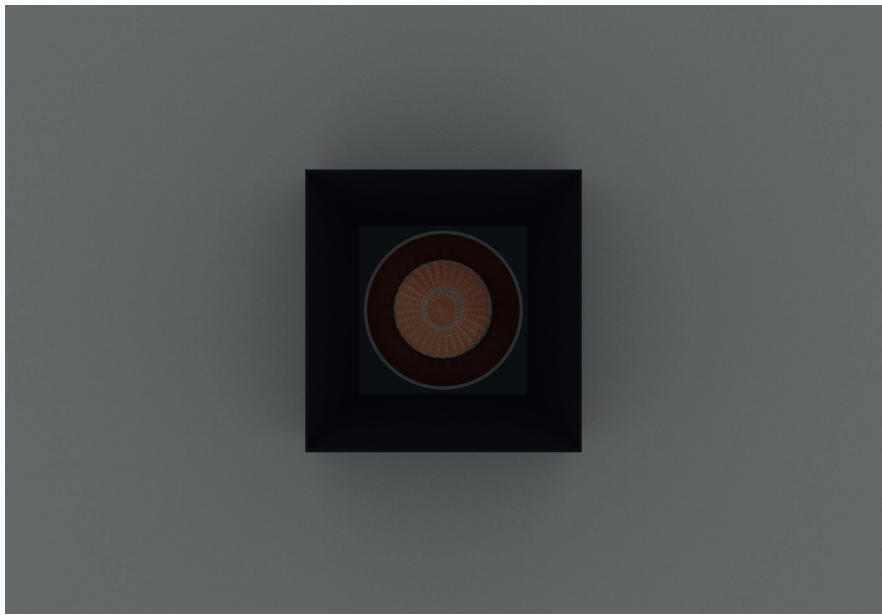

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
NMW-S75	on-off/DALI	12W	2220LM	90	220V	85 x 85 x 65mm

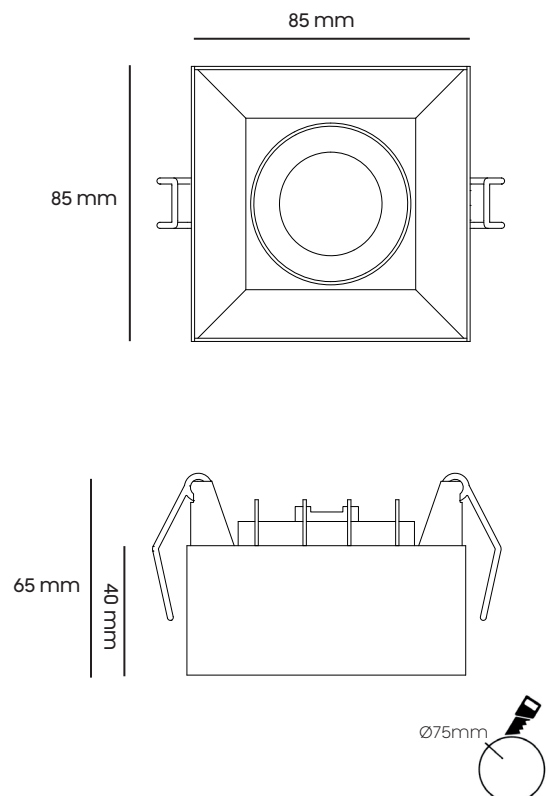

CE-R1-M-01

Surface

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9




Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-R1-M-01	on-off/DALI	8W	1480LM	90	220V	220 x 60 x 183.6mm (Ø23 x 138mm)

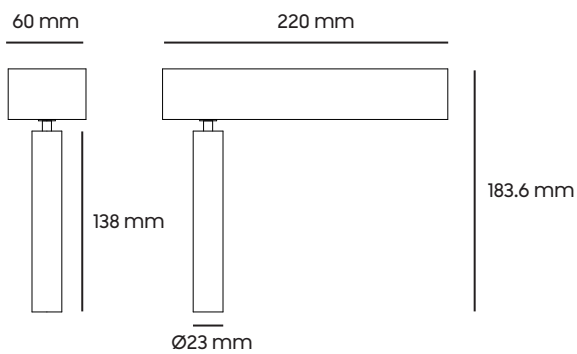


CE-R1-M-02

Surface



Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

26° 38°


Body Color

RAL9005 RAL9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-R1-M-02	on-off/DALI	2 x 8 W	2 x 1480 LM	90	220V	250 x 60 x 183.6mm (Ø23 x 138mm)

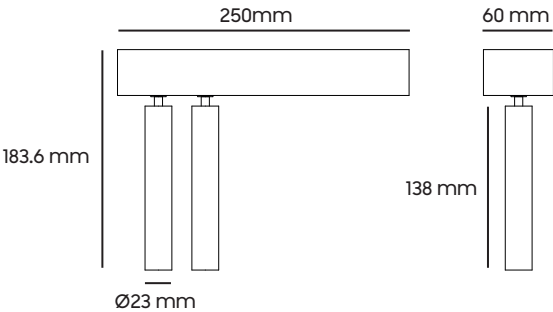


CE-R1-M-03

Surface

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

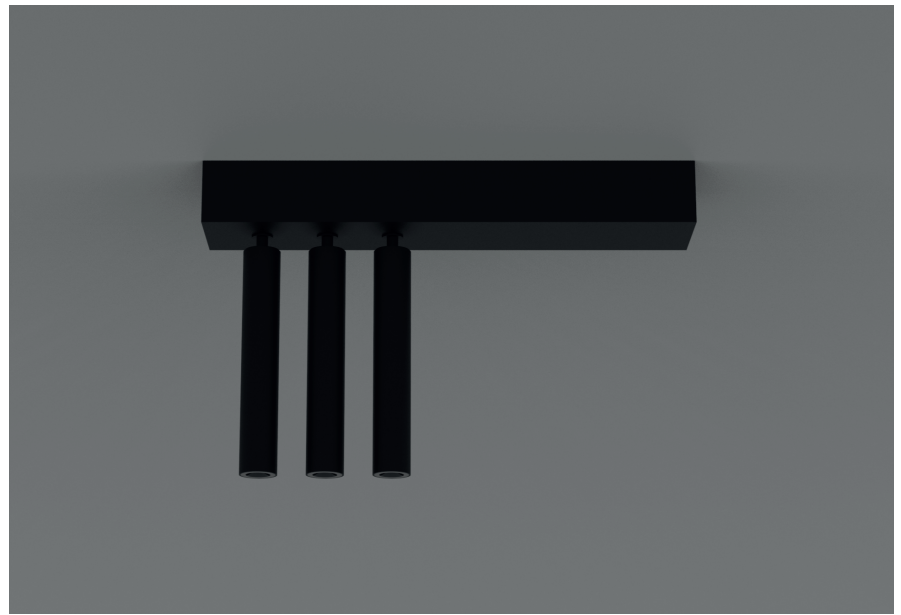

Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-R1-M-03	on-off/DALI	3 x 8W	3 x 1480LM	90	220V	300 x 60 x 183.6mm (Ø23 x 138mm)

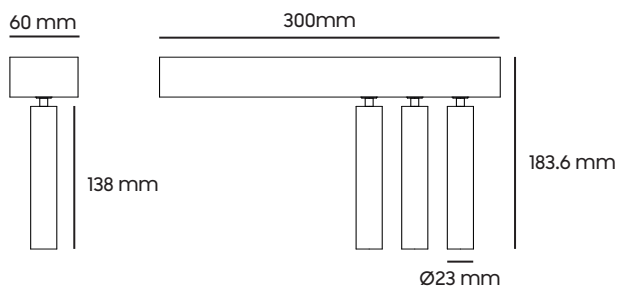


CE-C48-M-01

Surface

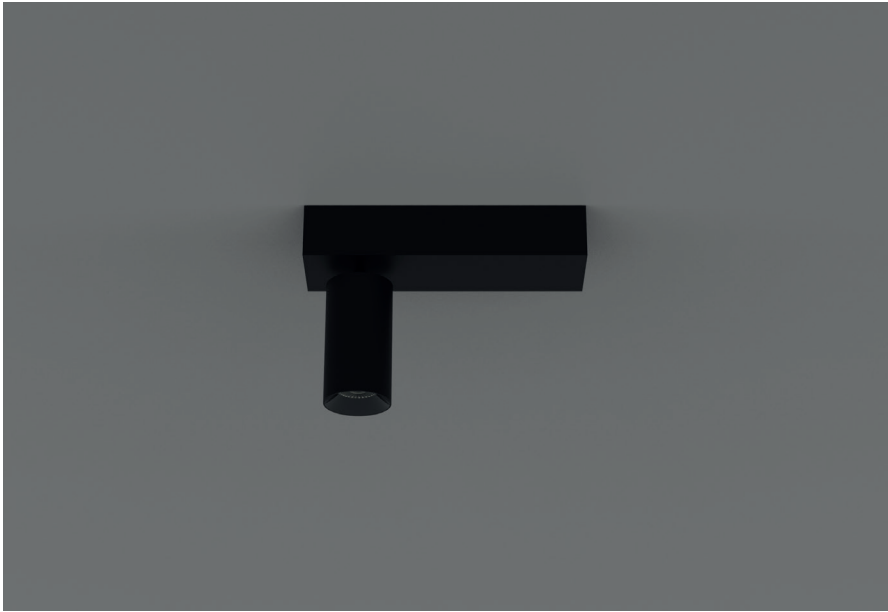

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

15° 24° 36° 60°


Body Color

RAL9005 RAL9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-C48-M-01	on-off/DALI	8W	1480LM	90	220V	220 x 60 x 138.7mm (Ø47.4 x 90mm)


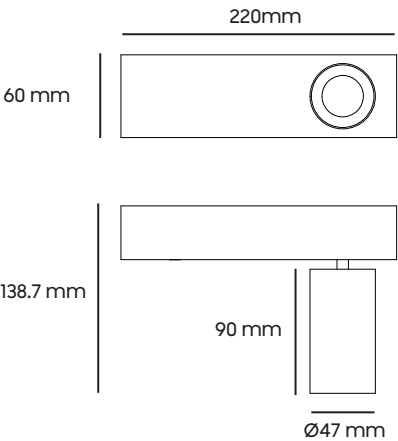


CE-C48-M-02


Surface

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-C48-M-02	on-off/DALI	2 x 8W	2 x 1480LM	90	220V	300 x 60 x 138.7mm (Ø47.4 x 90mm)

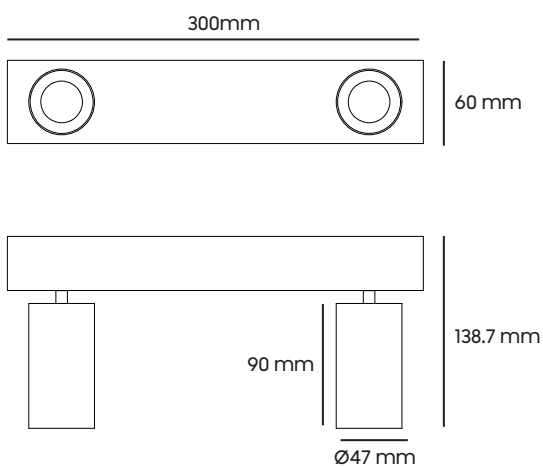


CE-C48-M-03

Surface

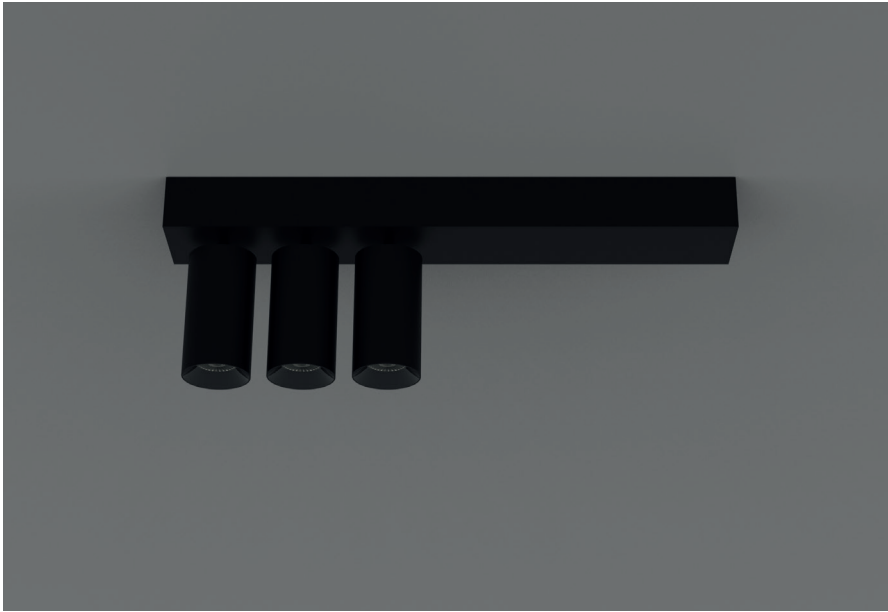

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

15° 24° 36° 60°


Body Color

RAL 9005 RAL 9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-C48-M-03	on-off/DALI	3 x 8W	3 x 1480LM	90	220V	400 x 60 x 138.7mm (Ø47.4 x 90mm)

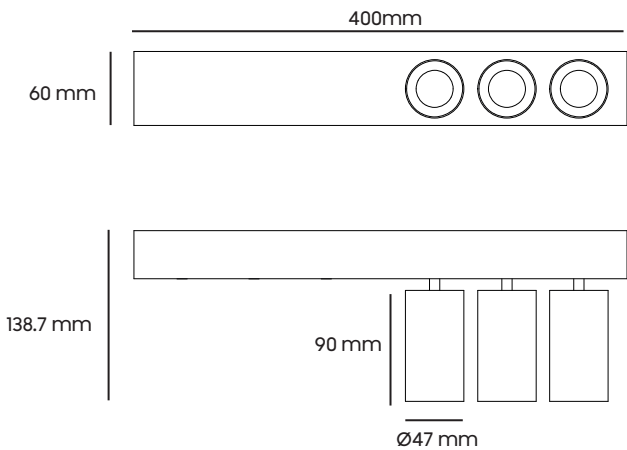

CE-R4-M-01

Surface

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9




Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-R4-M-01	on-off/DALI	10W	1850LM	90	220V	220 x 60 x 153.7mm (Ø54.4 x 105mm)

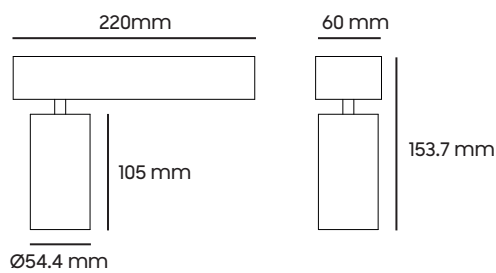

CE-R4-M-02

Surface



Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-R4-M-02	on-off/DALI	2 x 10W	2 x 1850LM	90	220V	300 x 60 x 153.7mm (Ø54.4 x 105mm)

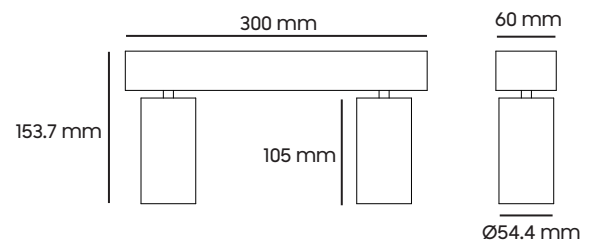


CE-R4-M-03

Surface

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

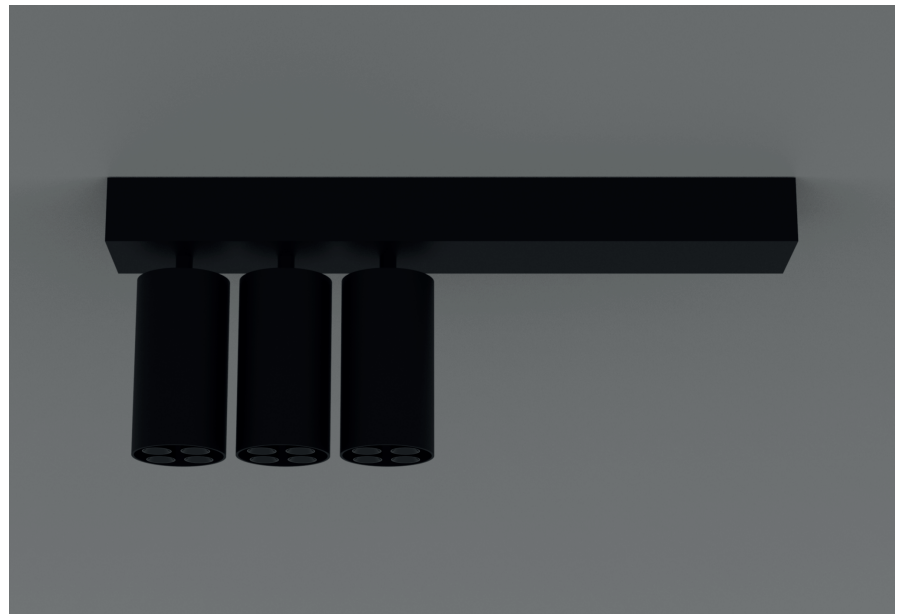


Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-R4-M-03	on-off/DALI	3 x 10W	3 x 1850LM	90	220V	400 x 60 x 153.7mm (Ø54.4 x 105mm)

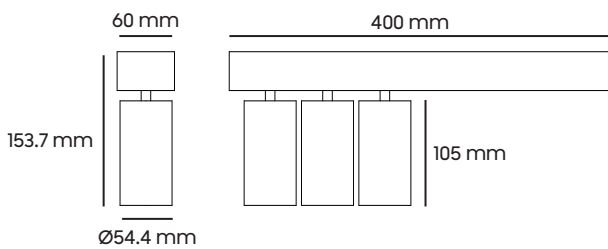


CE-S4-M-01

Surface

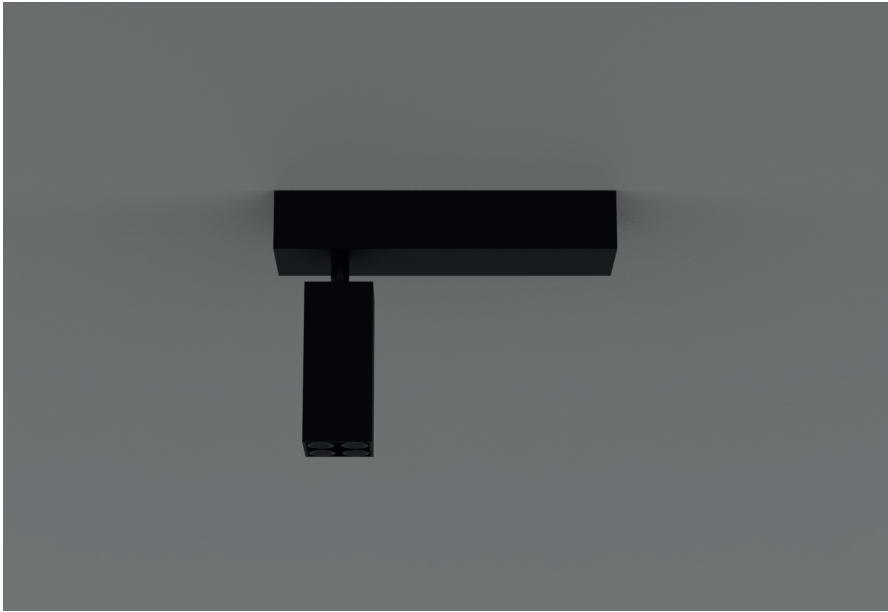

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

26° 38°


Body Color

RAL9005 RAL9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-S4-M-01	on-off/DALI	10W	1850LM	90	220V	220 x 60 x 153.7mm (44x44x105 mm)

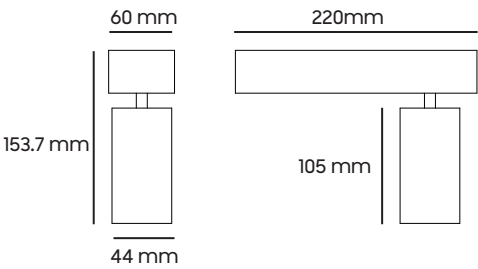

CE-S4-M-02

Surface

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9




Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-S4-M-02	on-off/DALI	2 x 10W	2 x 1850LM	90	220V	300 x 60 x 153.7mm(44x44x105 mm)

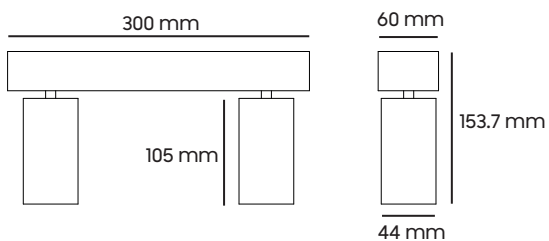


CE-S4-M-03

Surface

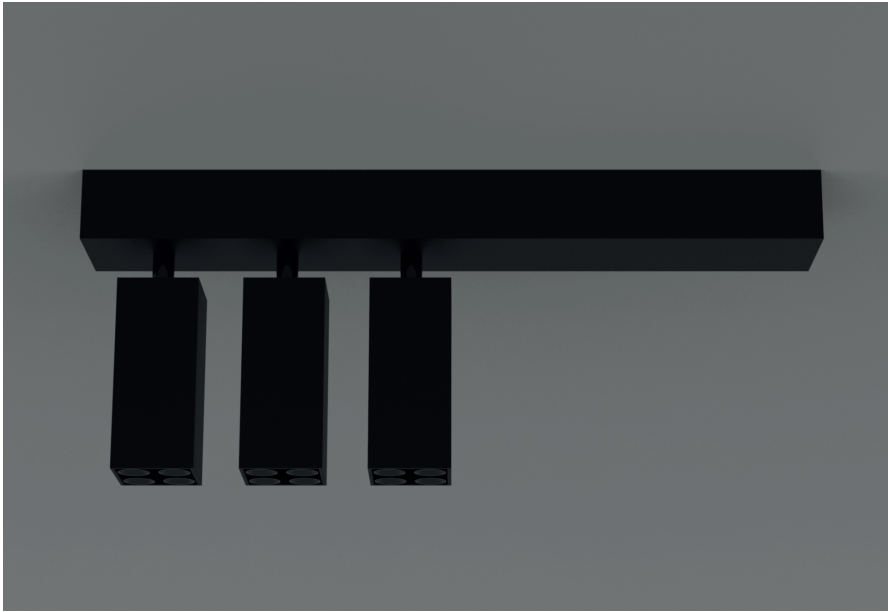

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

26° 38°


Body Color

RAL9000 RAL9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-S4-M-03	on-off/DALI	3 x 10W	3 x 1850LM	90	220V	400 x 60 x 153.7mm(44 x 44 x 105mm)

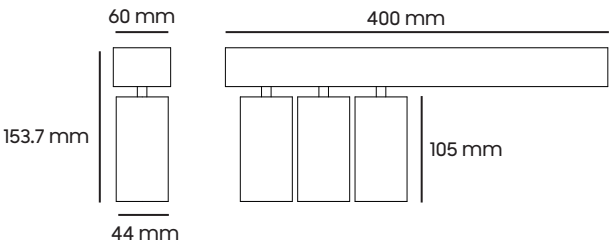


Effect 28X Tunable

Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Move Diffuser 6	on-off/DALI	2W	370LM	90	220V	Ø x 25 x 100 mm

CE-LM-S04

Surface



Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

25° 38°



Body Color

RAL 9005 RAL 9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-LM-S04	on-off/DALI	15W	2775LM	90	220V	44 x 44 x 220mm

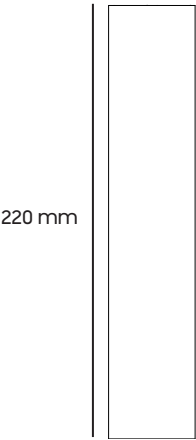

CE-LM-R04

Surface

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-LM-R04	on-off/DALI	15W	2775LM	90	220V	Ø54.4 x 220mm

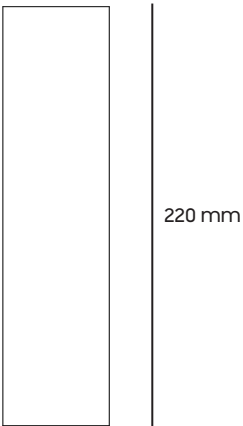


AW-MD006-4

Surface

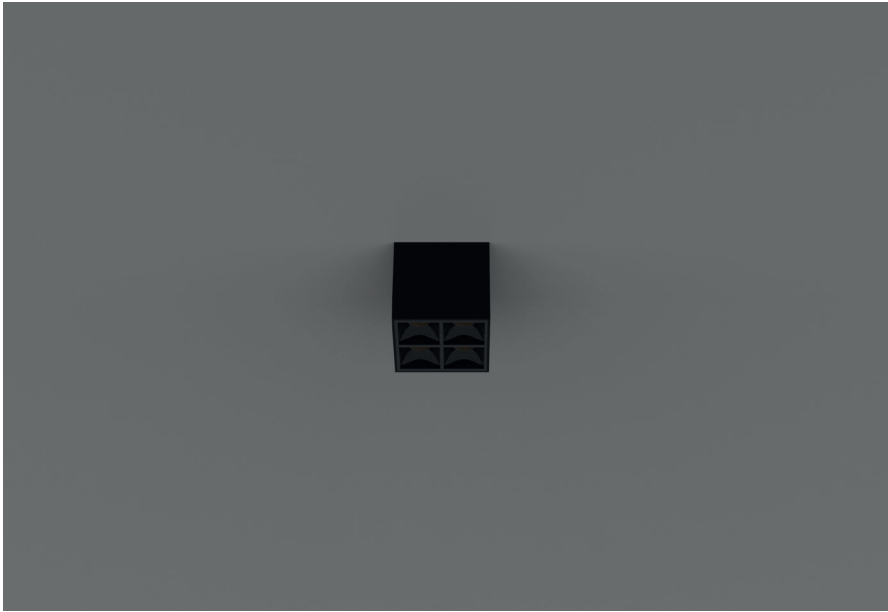

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9




Light Distribution

Body Color

Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-MD006-4	on-off/DALI	15W	2775LM	90	220V	81.7 x 81.7 x 80 mm


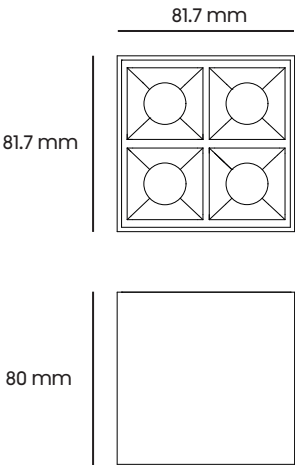


AW-MD006-9


Surface

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-MD006-9	on-off/DALI	36W	6660LM	90	220V	119.6 x 119.6 x 90 mm


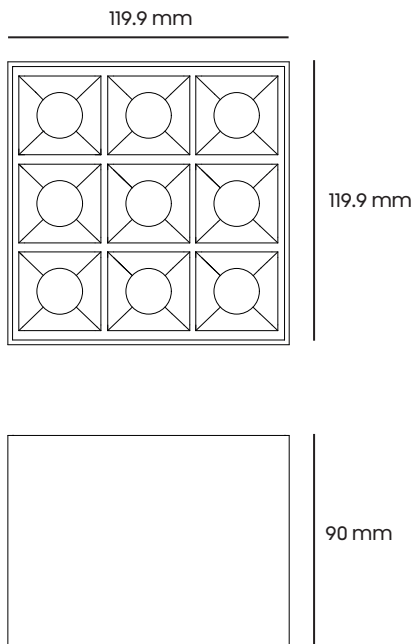


AW-XTD3470-05

Surface

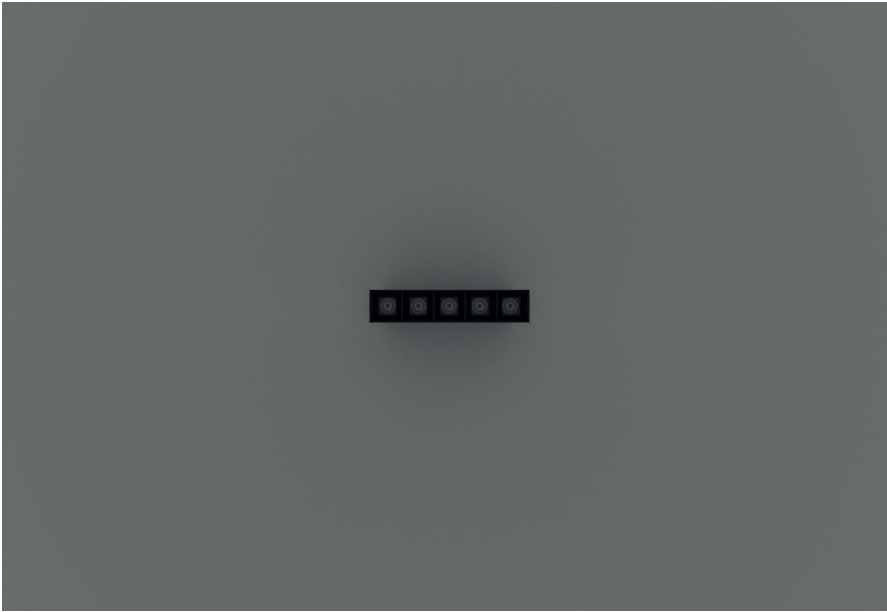

Quick Info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

15° 30° 45°


Body Color

RAL 9005 RAL 9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD3470-05	on-off/DALI	5W	925LM	90	220V	136.6 x 34 x 70mm



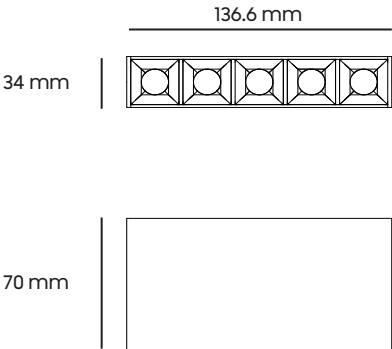


AW-XTD3470-10

Surface

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

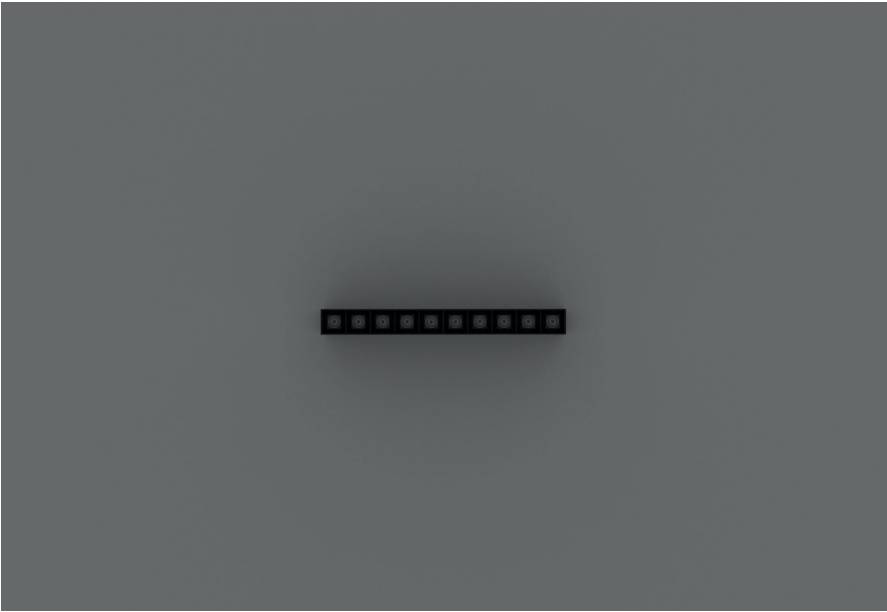

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD3470-10	on-off/DALI	10W	1850LM	90	220V	269.2 x 34 x 70mm

269.2 mm




34 mm




70 mm

AW-XTD3470-15

Surface

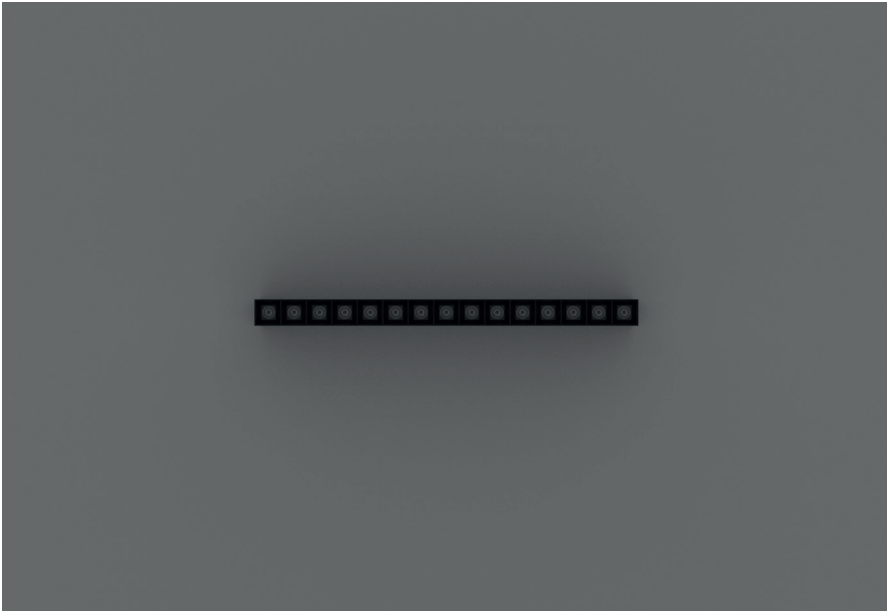

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

15° 30° 45°


Body Color

RAL9005 RAL9005

Light Color


2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD3470-15	on-off/DALI	15W	2775LM	90	220V	401.7 x 34 x 70mm

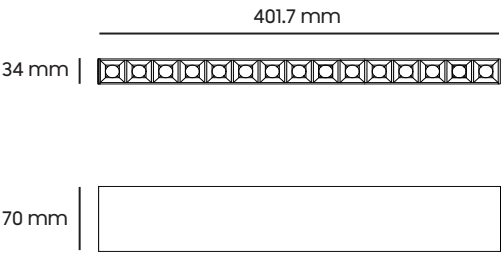




AW-XTD3470-20

Surface

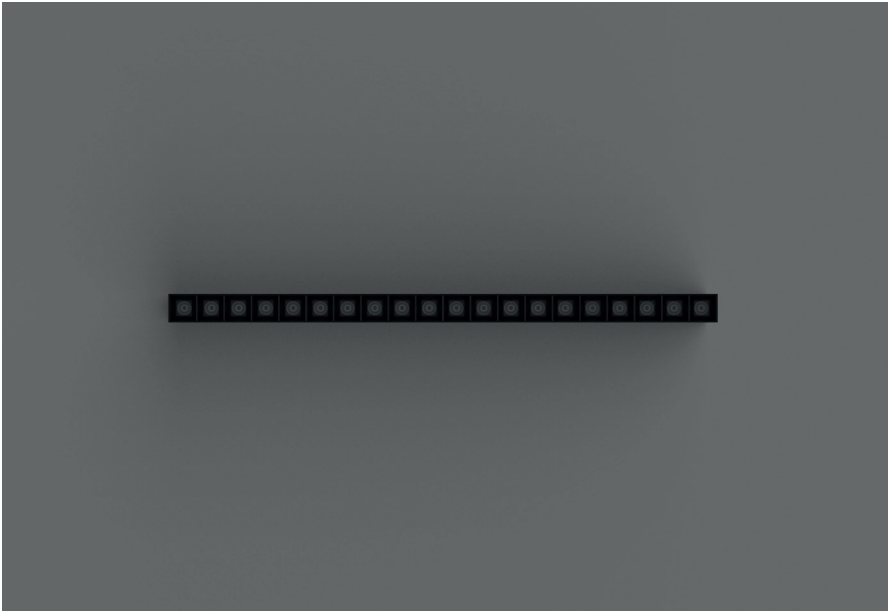


Quick Info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD3470-20	on-off/DALI	20W	3700LM	90	220V	534.4 x 34 x 70mm




AW-XTD3470-25

Surface

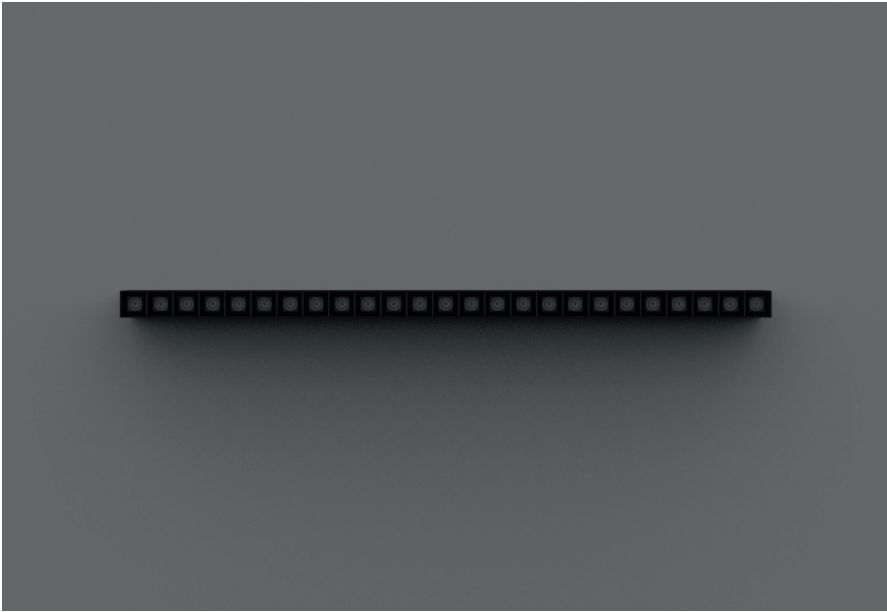

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

15° 30° 45°

Body Color

RAL9005 RAL9005

Light Color


2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD3470-25	on-off/DALI	25W	4625LM	90	220V	673 x 34 x 70mm




AW-MD005-3F

Surface

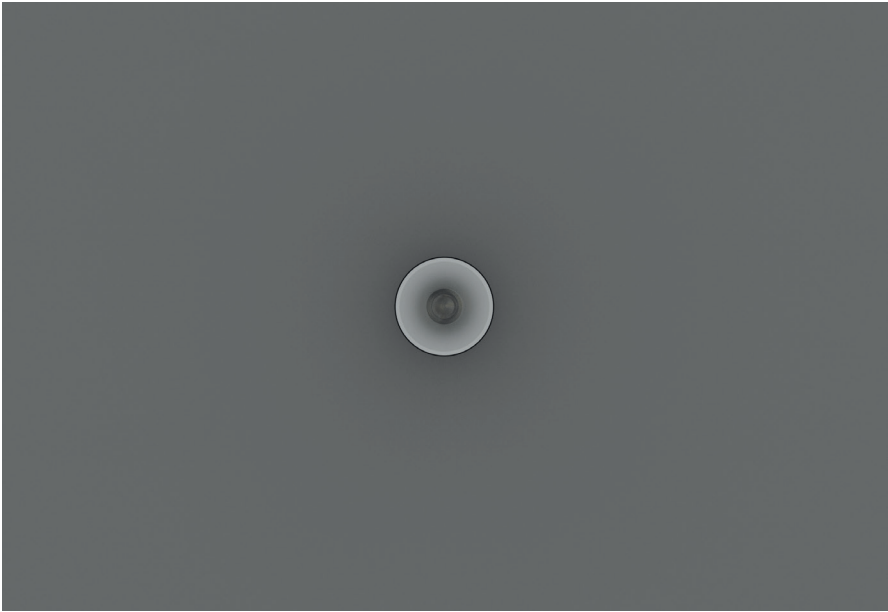


Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

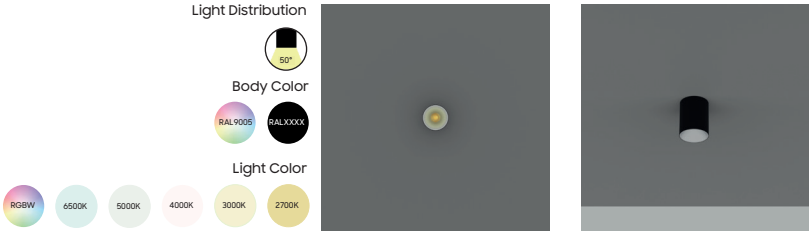


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-MD005-3F	on-off/DALI	10W	1850LM	90	220V	Ø82 x 106mm





AW-MD005-4F

Surface

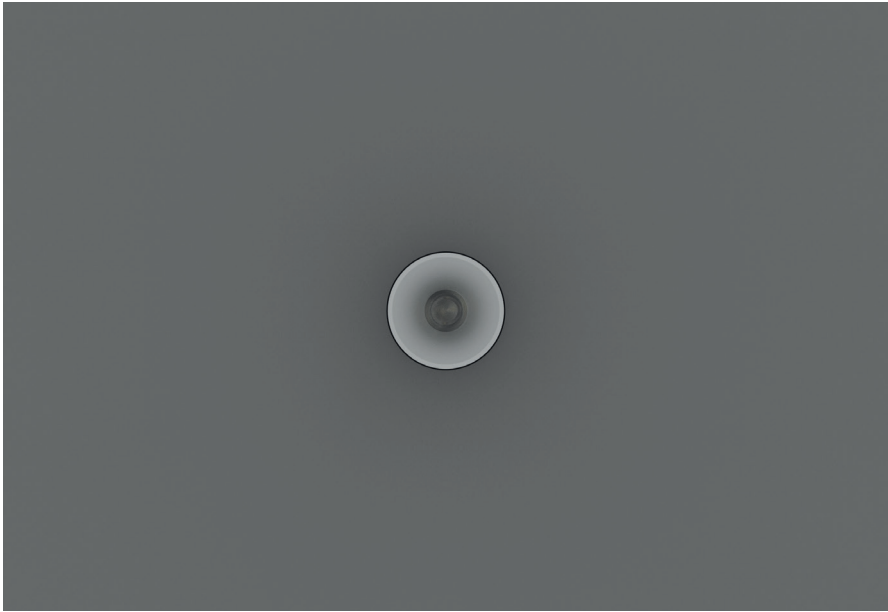

Quick Info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

45°


Body Color

RAL 9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-MD005-4F	on-off/DALI	20W	3700LM	90	220V	Ø115 x 120mm

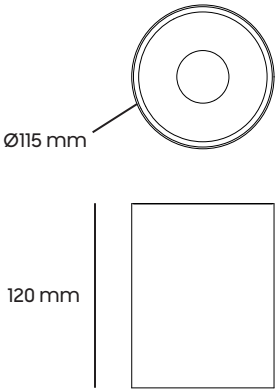


AW-MD005-6F

Surface

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

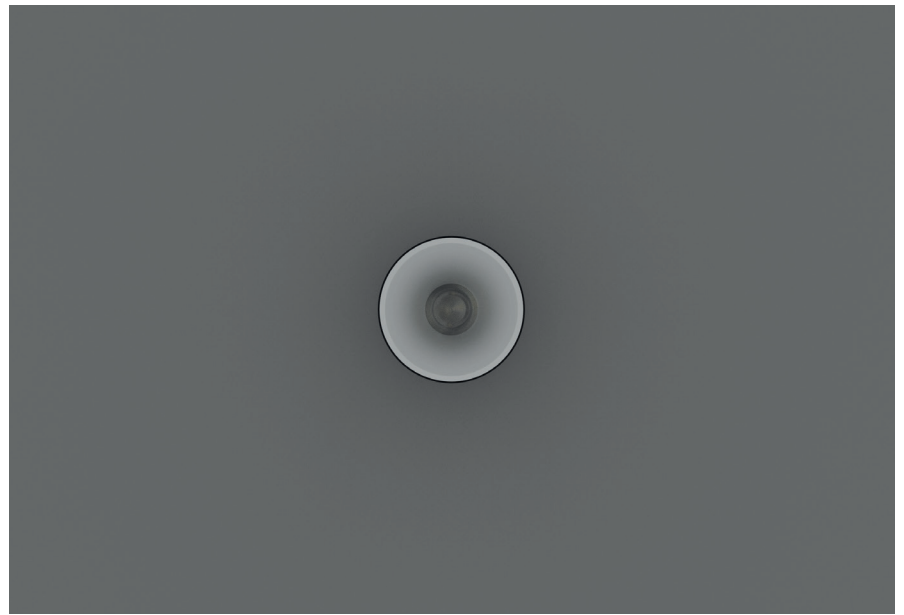



Light Distribution





Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-MD005-6F	on-off/DALI	30W	5550LM	90	220V	Ø149 x 143mm




AW-MD005-8F

Surface

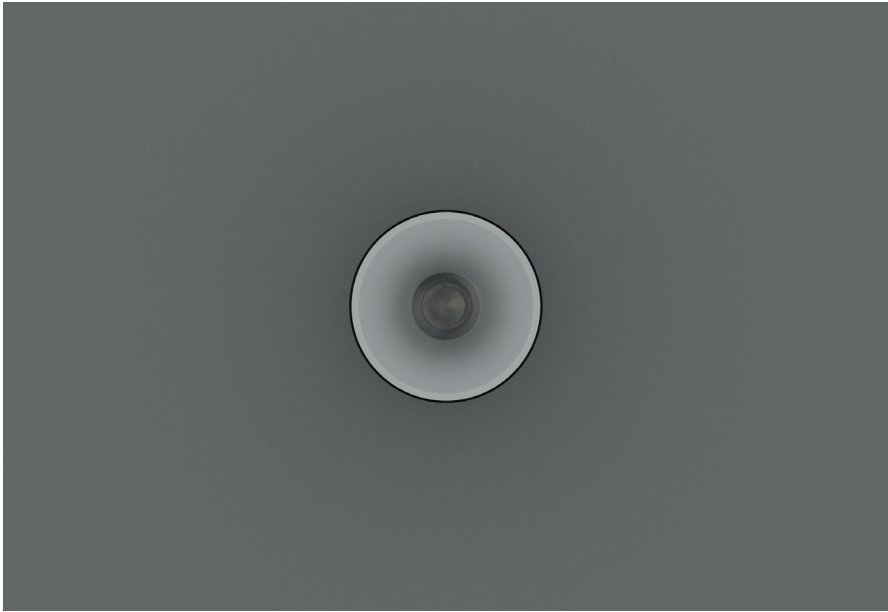

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

58°



Body Color

RAL 9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-MD005-8F	on-off/DALI	40W	7400LM	90	220V	Ø187.5 x 159mm

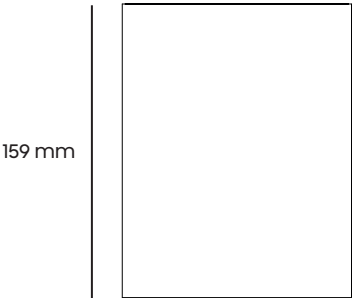
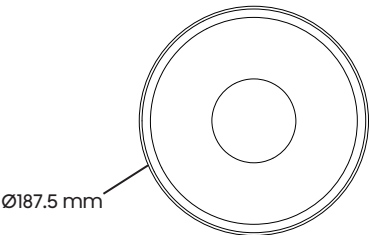


CE-XTD-B-S03



Trimless

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

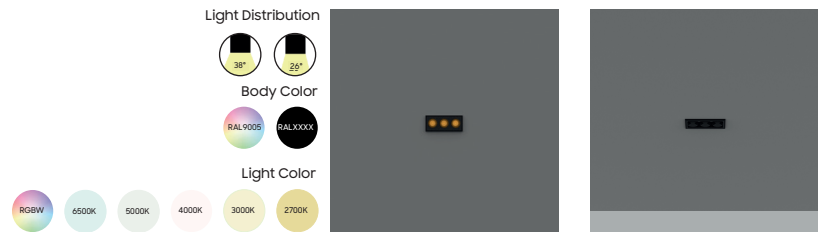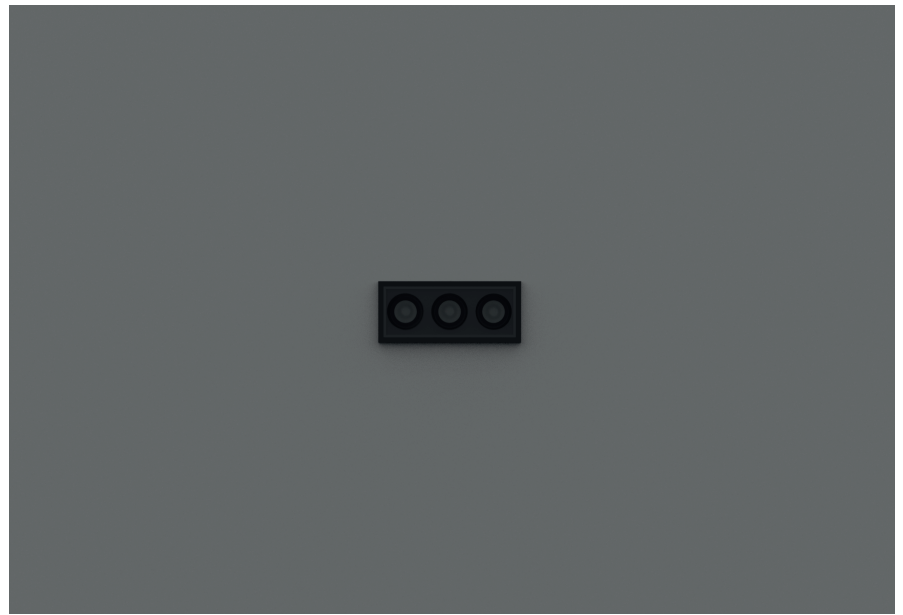


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-XTD-B-S-03	on-off/DALI	6W	1110LM	90	220V	68.6 x 60 x 43mm





CE-XTD-B-S06

Trimless

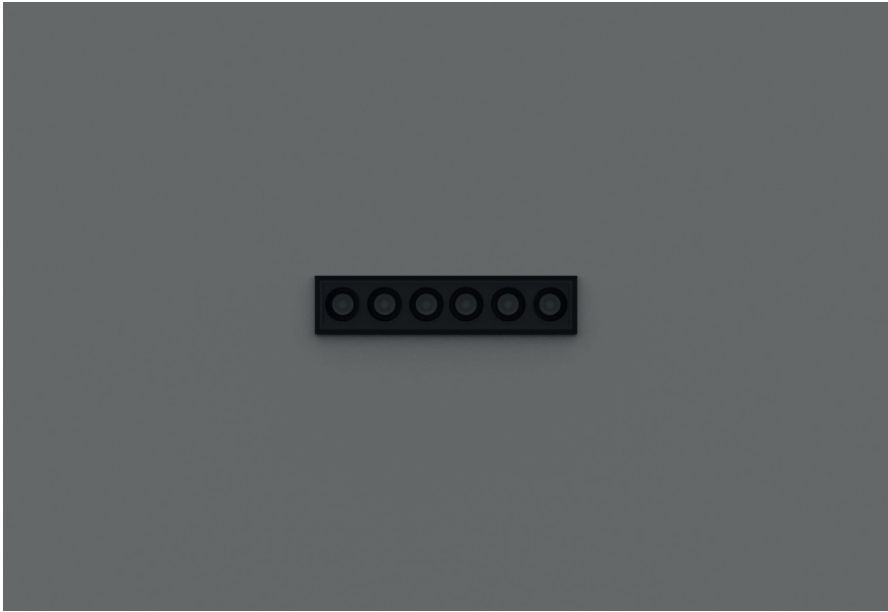

Quick Info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

26° 38°



Body Color

RAL9005 RAL9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-XTD-B-S06	on-off/DALI	10W	1850LM	90	220V	125.6 x 60 x 43mm

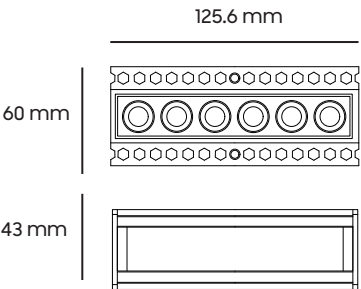


CE-XTD-B-S12

Trimless

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

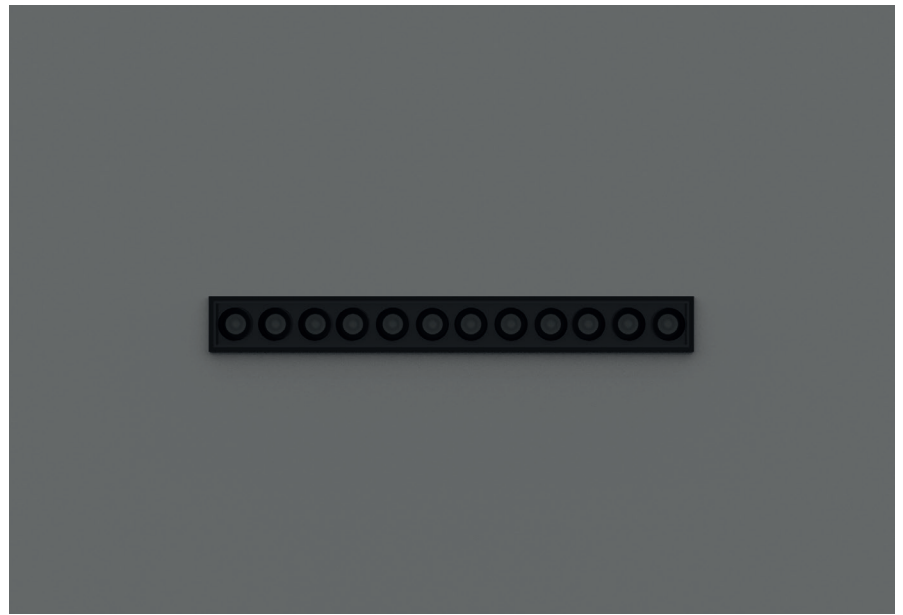


Light Distribution





Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
CE-XTD-B-S12	on-off/DALI	20W	3700LM	90	220V	239.6 x 60 x 43 mm

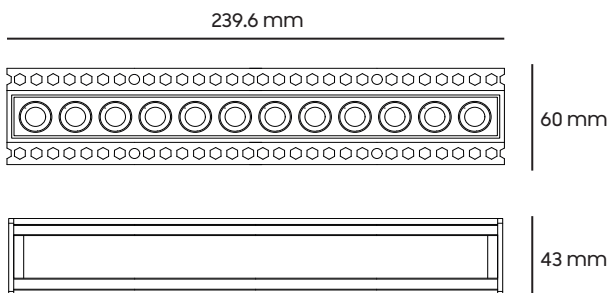

AW-XTD10-B-01

Trimless

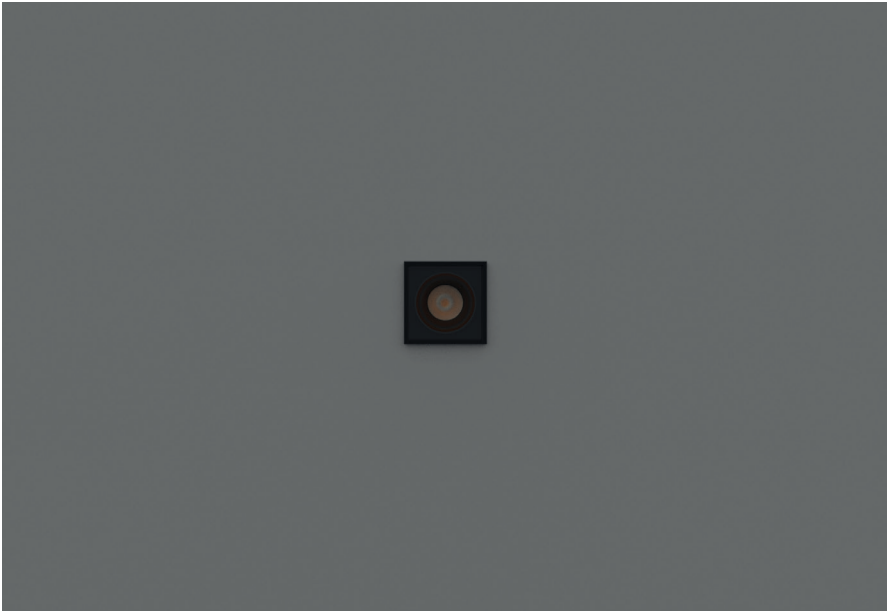



Quick Info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

Light Distribution

Body Color

Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD10-B-01	on-off/DALI	5W	925LM	90	220V	53 x 85.6 x 60.3mm





AW-XTD10-B-03

Trimless

Quick Info


Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

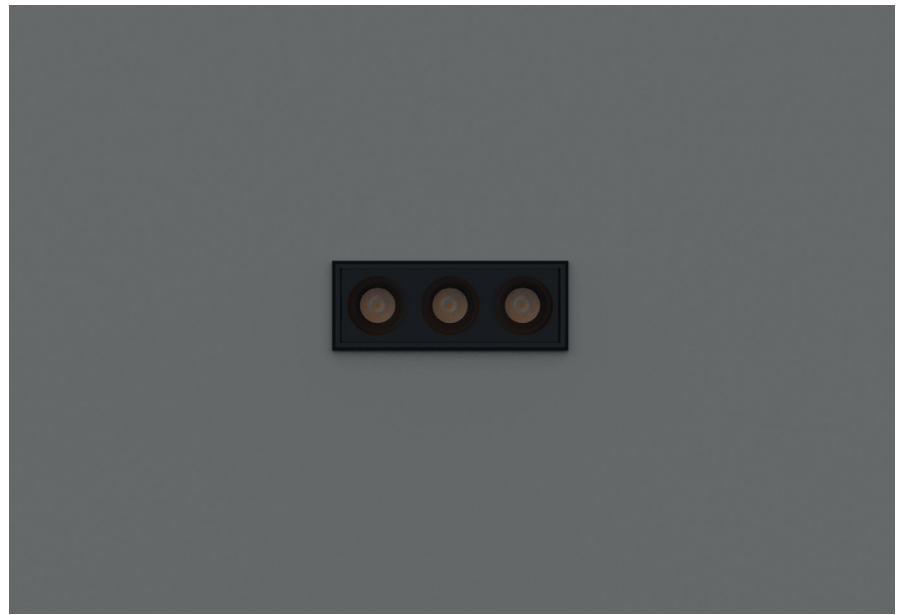




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD10-B-03	on-off/DALI	15W	2775LM	90	220V	142.8 x 85.6 x 60.3 mm





AW-XTD10-B-06

Trimless

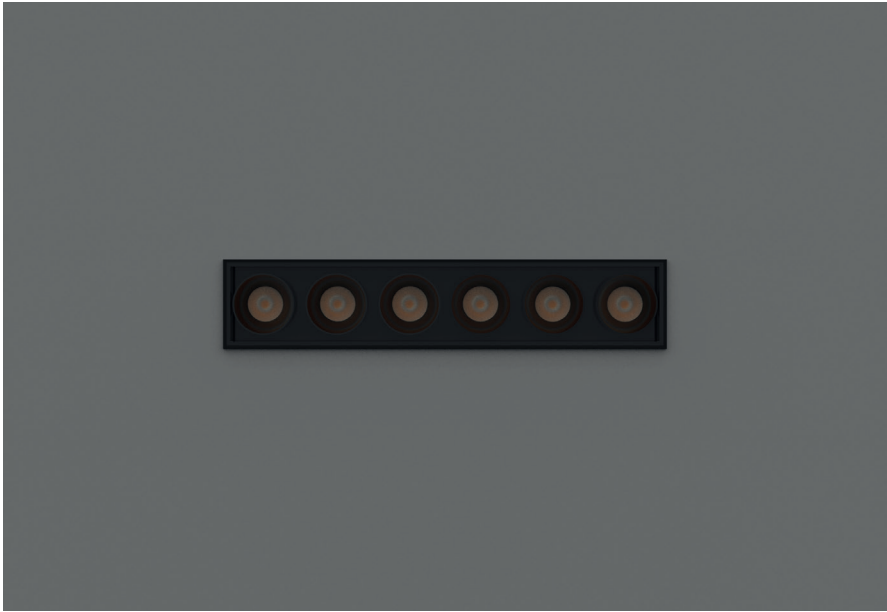

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

24° 36° 50°



Body Color

RAL9005 RAL9005

Light Color


2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD10-B-06	on-off/DALI	30W	5550LM	90	220V	278.2 x 85.6 x 60.3 mm

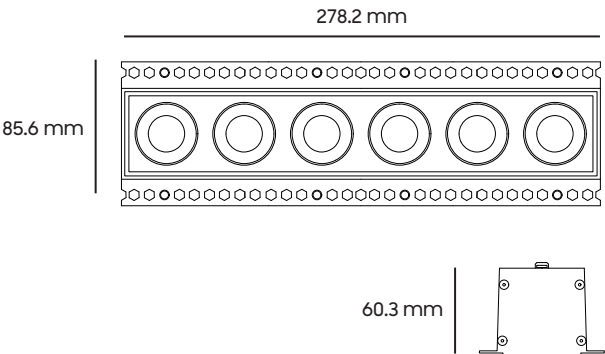

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Move Diffuser 6	on-off/DALI	2W	370LM	90	220V	Ø x 25 x 100 mm

Ø25mm

Ø25mm

MZ

Trimless

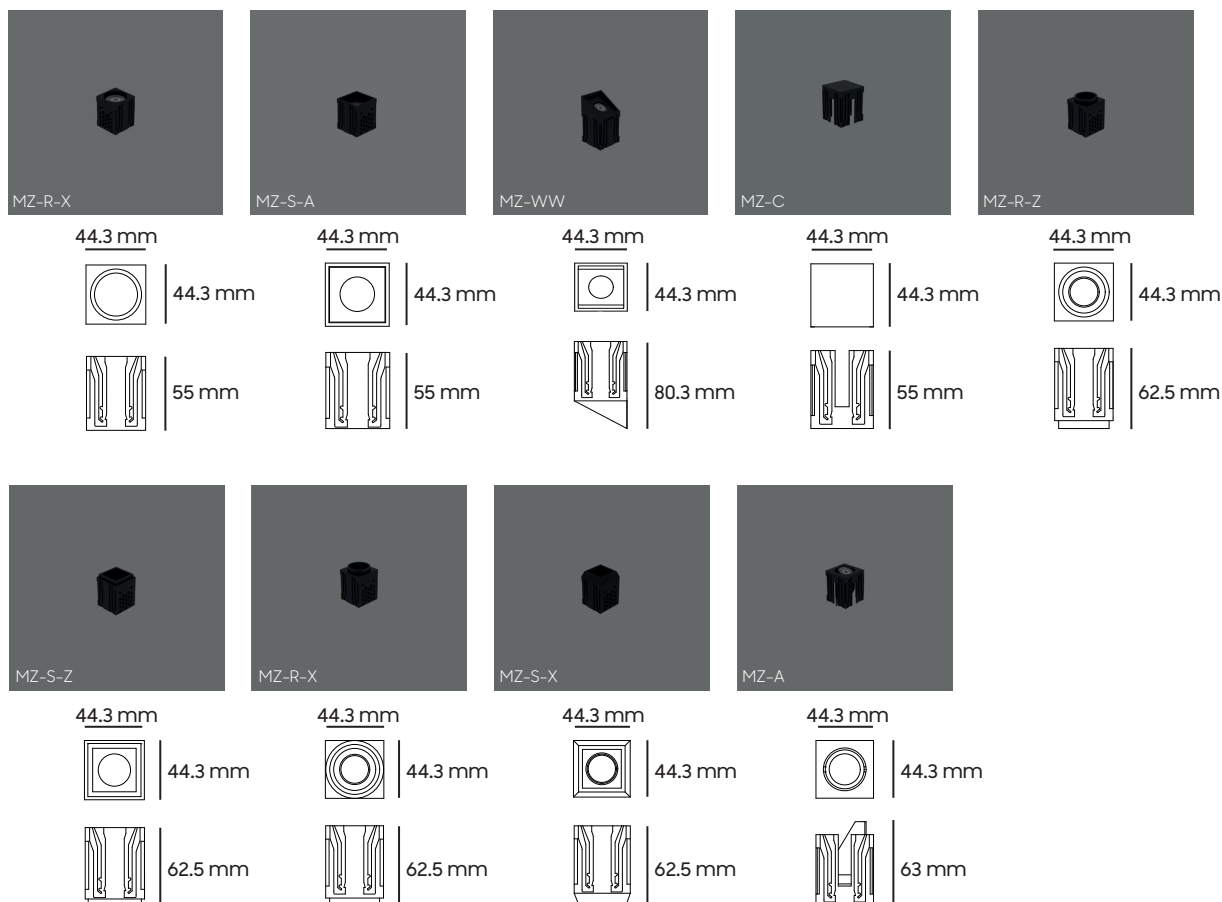

Light Distribution




Body Color






Light Color







Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
MZ-R-X	on-off/DALI	5W	5550LM	90	220V	44.3 x 44.3 x 55mm
MZ-S-A	on-off/DALI	5W	5550LM	90	220V	44.3 x 44.3 x 55mm
MZ-WW	on-off/DALI	5W	5550LM	90	220V	44.3 x 80.3 x 55mm
MZ-C	on-off/DALI	5W	5550LM	90	220V	44.3 x 44.3 x 55mm
MZ-R-Z	on-off/DALI	5W	5550LM	90	220V	44.3 x 44.3 x 62.5mm
MZ-S-Z	on-off/DALI	5W	5550LM	90	220V	44.3 x 44.3 x 62.5mm
MZ-R-X	on-off/DALI	5W	5550LM	90	220V	44.3 x 44.3 x 62.5mm
MZ-A	on-off/DALI	5W	5550LM	90	220V	44.3 x 44.3 x 63mm






MZ-E-01






MZ-E-02



MZ-E-03



MZ-E-04

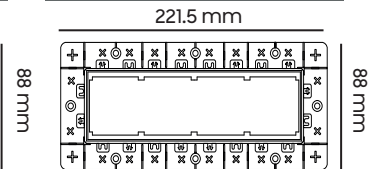

Quick Info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

Light Distribution

10° 25° 40° 60°


Body Color

RAL 9001 RAL 9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Move Diffuser 6	on-off/DALI	2W	370LM	90	220V	Ø x 25 x 100mm






AW-XTD-B-01



Trimless

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

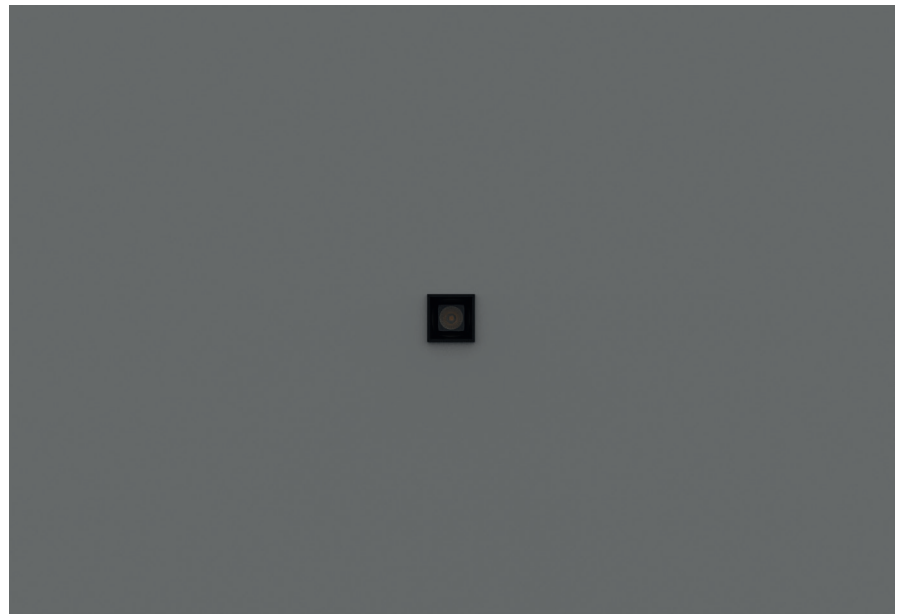


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD-B-01	on-off/DALI	3W	555LM	90	220V	72 x 41 x 49mm



AW-XTD-B-02

Trimless

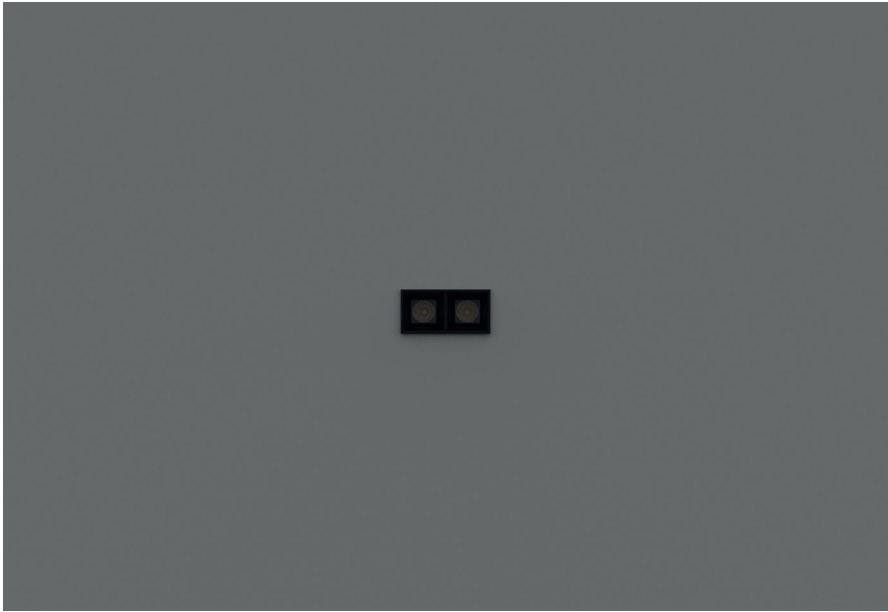

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

Light Distribution

15° 30° 45°



Body Color

RAL 9001X RAL 9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD-B-02	on-off/DALI	5W	925LM	90	220V	72 x 71 x 49mm






AW-XTD-B-03



Trimless

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

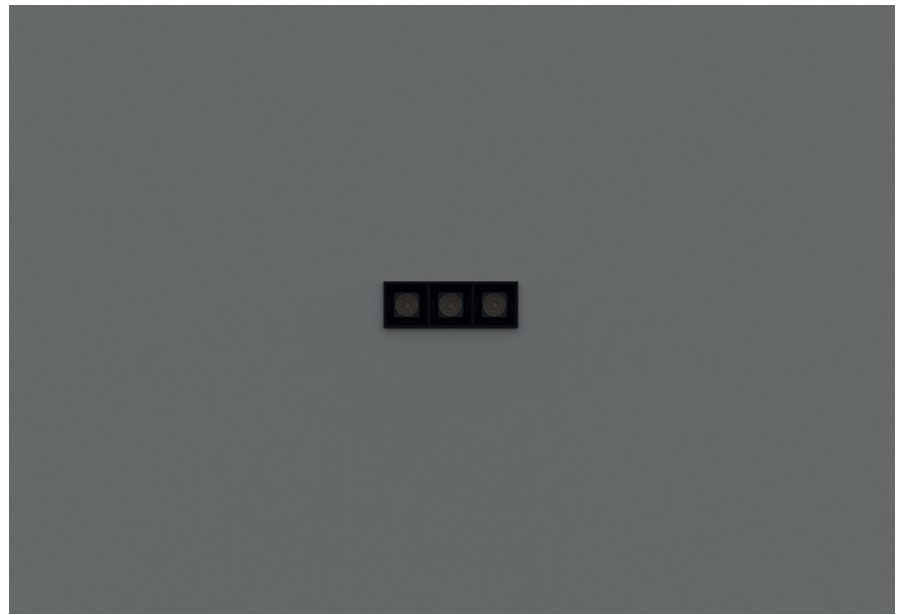


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD-B-03	on-off/DALI	2W	370LM	90	220V	87.4 x 72 x 49mm




AW-XTD-B-05

Trimless

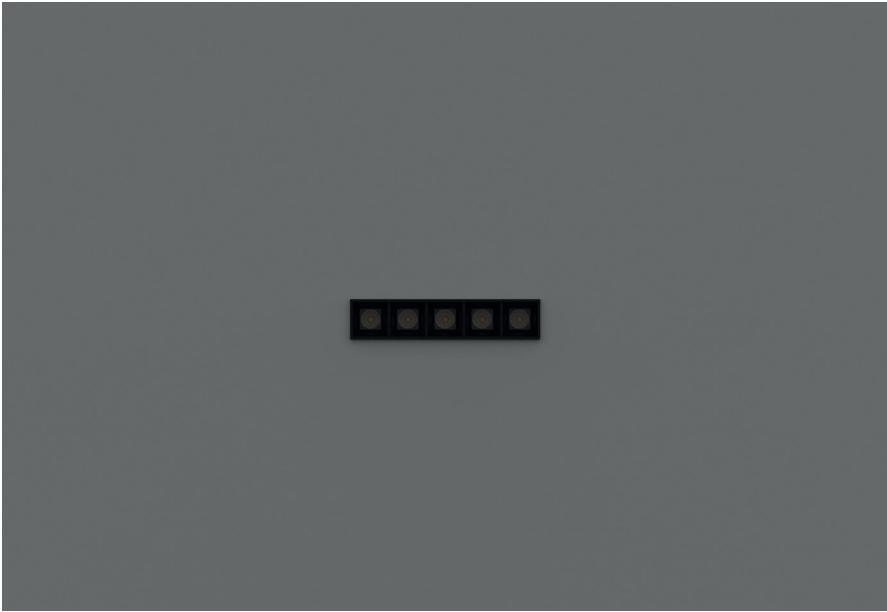

Quick Info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

15° 30° 45°



Body Color

RAL9005 RAL9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD-B-05	on-off/DALI	12W	2220LM	90	220V	143 x 72 x 49mm


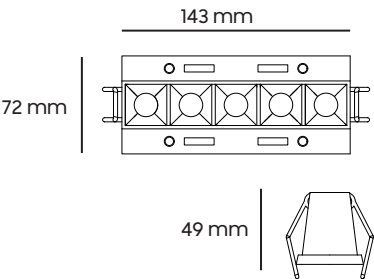


AW-XTD-B-10



Trimless

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

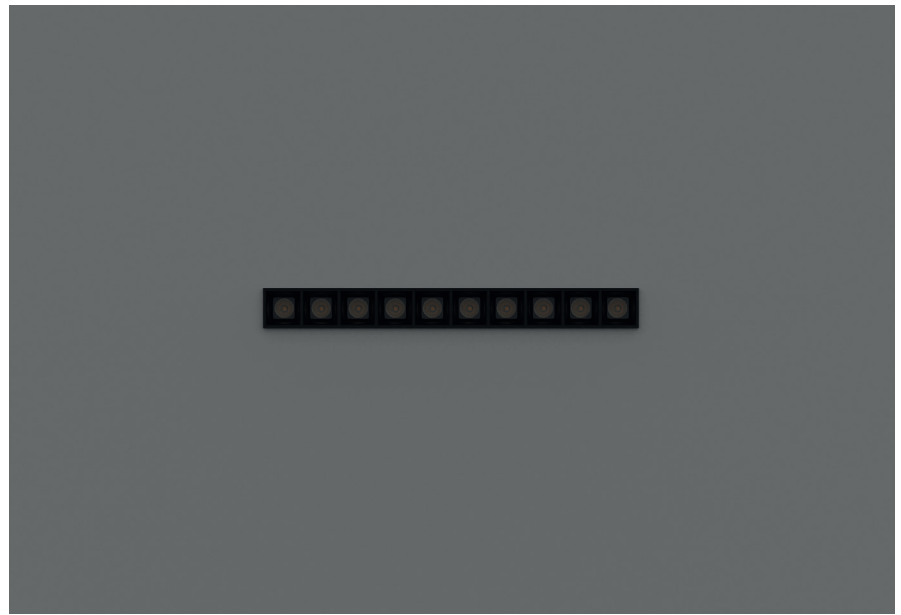


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD-B-10	on-off/DALI	20W	3700LM	90	220V	276 x 72 x 49mm

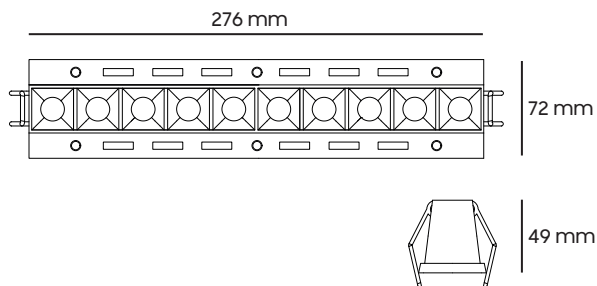

AW-XTD-B-15

Trimless

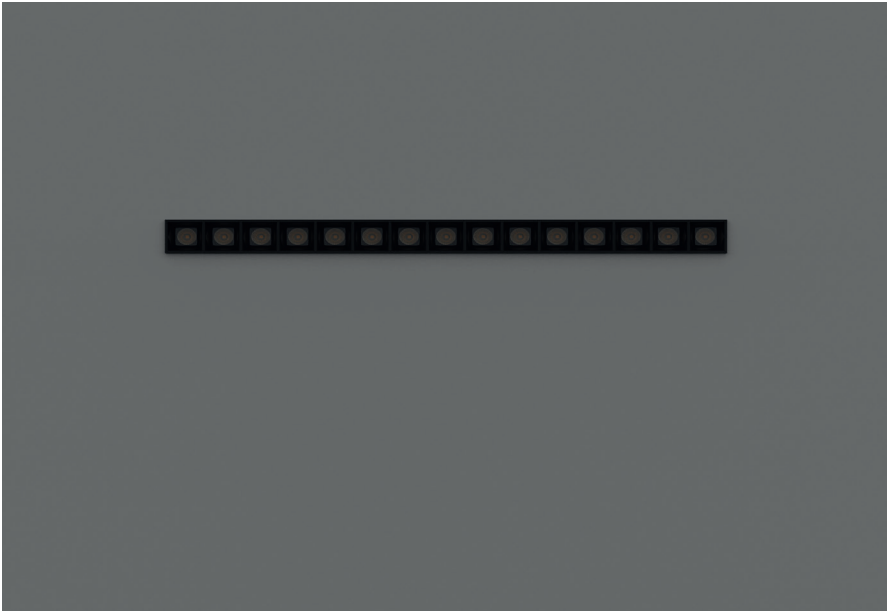

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

Light Distribution

15° 30° 45°



Body Color

RAL9005 RAL9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
AW-XTD-B-15	on-off/DALI	30W	5550LM	90	220V	408 x 72 x 49mm

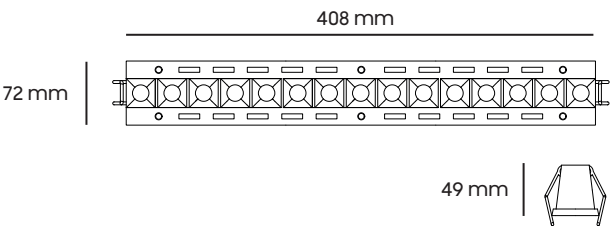


Cell DF

Honeycomb Ceiling

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

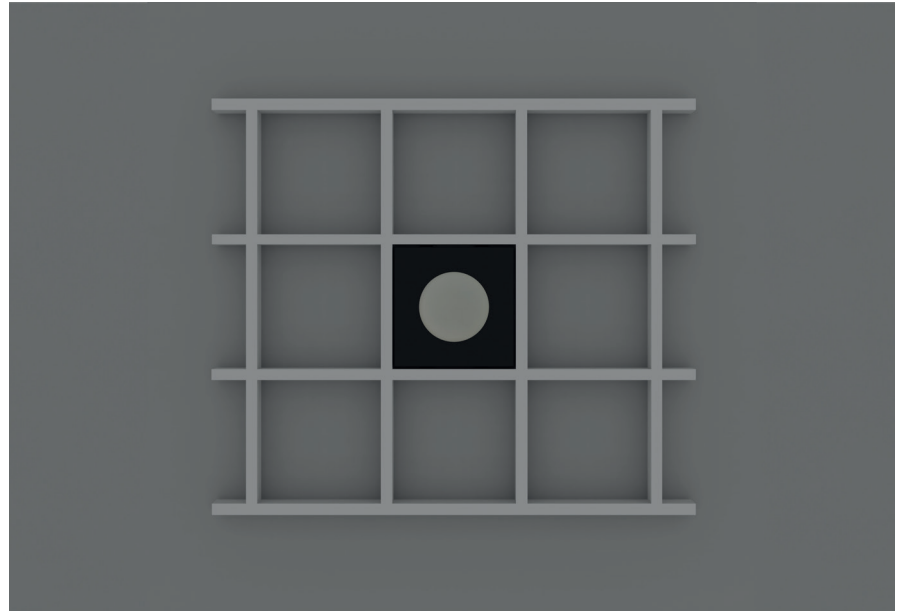



Light Distribution





Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Cell DF 70	on-off/DALI	10-12W	370LM	90	220V	69.5 x 69.5 x 80mm
Cell DF 75	on-off/DALI	10-12W	370LM	90	220V	74.5 x 74.5 x 80mm
Cell DF 80	on-off/DALI	10-12W	370LM	90	220V	79.5 x 79.5 x 80mm
Cell DF 85	on-off/DALI	10-12W	370LM	90	220V	84.5 x 84.5 x 80mm
Cell DF 90	on-off/DALI	10-12W	370LM	90	220V	89.5 x 89.5 x 80mm
Cell DF 100	on-off/DALI	10-12W	370LM	90	220V	99.5 x 99.5 x 80mm


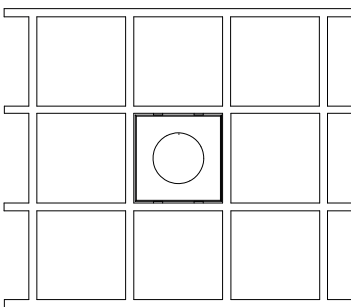


Cell GU

Honeycomb Ceiling

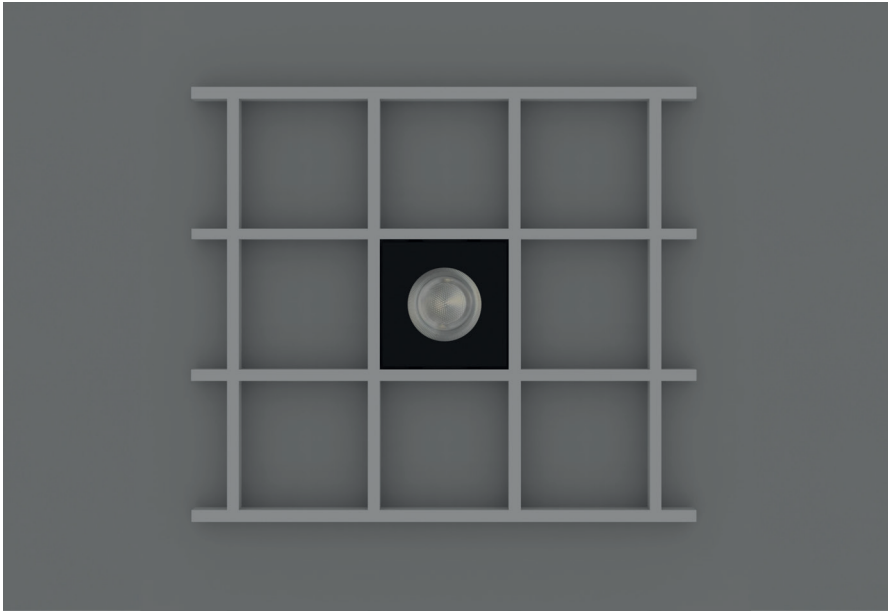

Quick Info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution

24° 36°


Body Color

RAL9005 RAL9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Cell GU 70	on-off/DALI	7-9W	370LM	90	220V	69.5 x 69.5 x 80mm
Cell GU 75	on-off/DALI	7-9W	370LM	90	220V	74.5 x 74.5 x 80mm
Cell GU 80	on-off/DALI	7-9W	370LM	90	220V	79.5 x 79.5 x 80mm
Cell GU 85	on-off/DALI	7-9W	370LM	90	220V	84.5 x 84.5 x 80mm
Cell GU 90	on-off/DALI	7-9W	370LM	90	220V	89.5 x 89.5 x 80mm
Cell GU 100	on-off/DALI	7-9W	370LM	90	220V	99.5 x 99.5 x 80mm

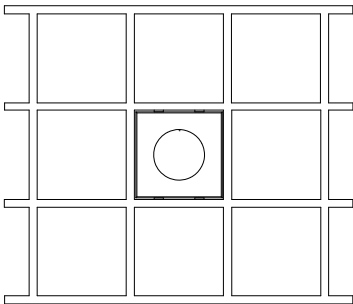


Cell RF

Honeycomb Ceiling

Quick Info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

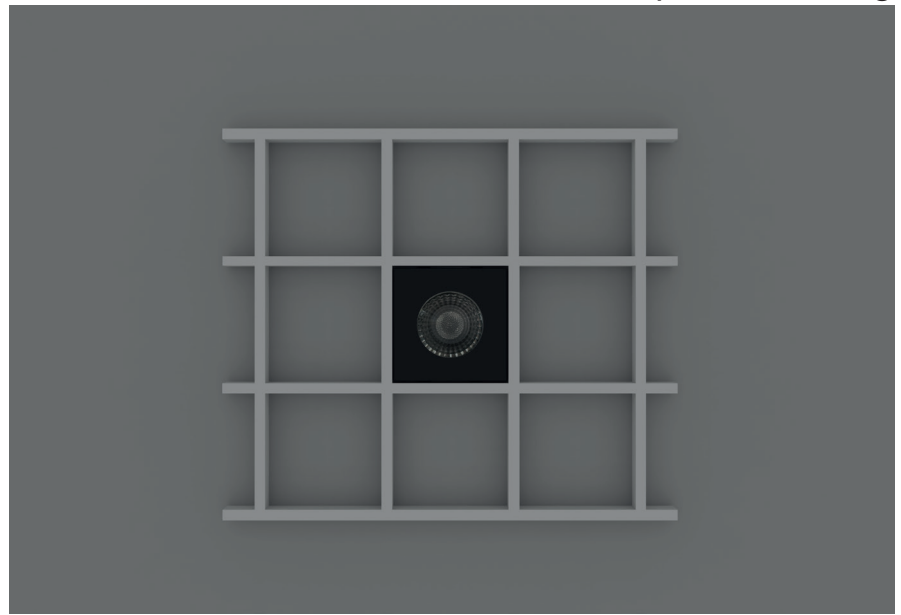


Light Distribution





Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Cell RF 70	on-off/DALI	12-18W	370LM	90	220V	69.5 x 69.5 x 80mm
Cell RF 75	on-off/DALI	12-18W	370LM	90	220V	74.5 x 74.5 x 80mm
Cell RF 80	on-off/DALI	12-18W	370LM	90	220V	79.5 x 79.5 x 80mm
Cell RF 85	on-off/DALI	12-18W	370LM	90	220V	84.5 x 84.5 x 80mm
Cell RF 90	on-off/DALI	12-18W	370LM	90	220V	89.5 x 89.5 x 80mm
Cell RF 100	on-off/DALI	12-18W	370LM	90	220V	99.5 x 99.5 x 80mm


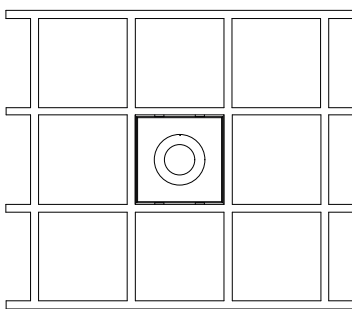


Cell SDF

Honeycomb Ceiling

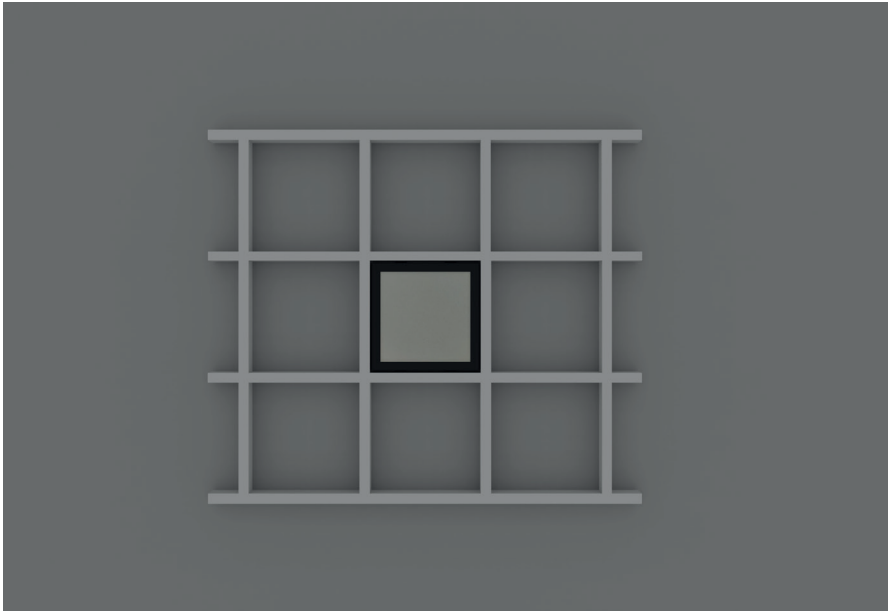

Quick Info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9




Light Distribution









Body Color

Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Cell SDF 70	on-off/DALI	10-12W	370LM	90	220V	69.5 x 69.5 x 80mm
Cell SDF 75	on-off/DALI	10-12W	370LM	90	220V	74.5 x 74.5 x 80mm
Cell SDF 80	on-off/DALI	10-12W	370LM	90	220V	79.5 x 79.5 x 80mm
Cell SDF 85	on-off/DALI	10-12W	370LM	90	220V	84.5 x 84.5 x 80mm
Cell SDF 90	on-off/DALI	10-12W	370LM	90	220V	89.5 x 89.5 x 80mm
Cell SDF 100	on-off/DALI	10-12W	370LM	90	220V	99.5 x 99.5 x 80mm

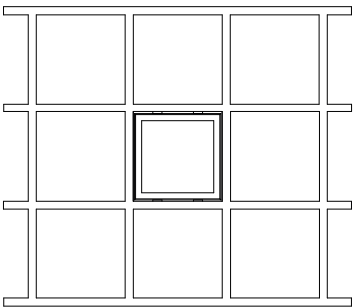

SEE LINEAR

RECESSED LINE		RECESSED LINEAR 01 38-46
		RECESSED LINEAR 02 42-70
		RECESSED LINEAR 03 62-109
SURFACE LINE		SURFACE LINEAR 04 32-38
		SURFACE LINEAR 05 33-60
		SURFACE LINEAR 06 41-42
		SURFACE LINEAR 07 45-50
		SURFACE LINEAR 08 53-83
		SURFACE LINEAR 09 60-50
		SURFACE LINEAR 10 71-50
		SURFACE LINEAR 11 87-83
ROUND		ROUND D 12
		ROUND R 13
		IN ROUND 14
		IN ROUND MINI 15
		OUT ROUND 16
		OUT ROUND MINI 17
TRIANGLE		TRIANGLE FILLET D 18
		TRIANGLE FILLET R 19
		TRIANGLE SHARP D 20
		TRIANGLE SHARP R 21
SQUARE		SQUARE FILLET D 22
		SQUARE FILLET R 23
		SQUARE SHARP D 24
		SQUARE SHARP R 25
RECTANGLE		RECESSED FILLET D 26
		RECESSED FILLET R 27
		RECESSED SHARP D 28
		RECESSED SHARP R 29
HEXAGON		HEXAGON FILLET D 30
		HEXAGON FILLET R 31
		HEXAGON SHARP D 32
		HEXAGON SHARP R 33
DESIGN		YOYO FILLET D 34
		YOYO SHARP R 35
		LINE FILLET 36
		TUXEDO 37
BLADE LINE		BLADE LINE 01 38
		BLADE LINE 02 38
		BLADE LINE 03 38
		BLADE LINE 04 38
		BLADE LINE SM 01 39
		BLADE LINE SM 02 39
		BLADE LINE SM 03 39
		BLADE LINE SM 04 39

BLADE LINE				
	BLADE LINE TRIMLESS 01	BLADE LINE TRIMLESS 02	BLADE LINE TRIMLESS 03	BLADE LINE TRIMLESS 04
	40	40	40	40
TRIM				
	TRIM 01	TRIM 35S	TRIM 35	TRIM 50S
	42	43	44	45

Recessed Linear 38-46

Recessed Line

Quick info

Body: Aluminum
Paint: Electrostatic Powder
Efficiency: > 0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

Light Distribution






Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
R.Linear 38x46-100	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
R.Linear 38x46-120	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
R.Linear 38x46-150	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
R.Linear 38x46-180	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
R.Linear 38x46-200	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
R.Linear 38x46-250	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
R.Linear 38x46-300	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC



Recessed Linear 42-70

Recessed Line

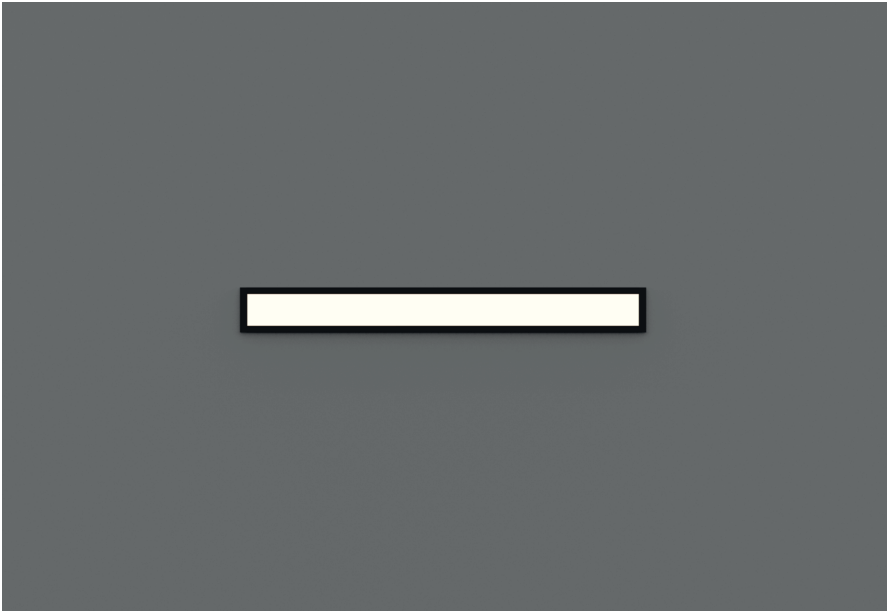




Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

Light Distribution

Body Color

Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
R.Linear 42x70-100	on-off/DALI	M/21-30-42-60W	W/145LM	90	220V-240V AC
R.Linear 42x70-120	on-off/DALI	M/21-30-42-60W	W/145LM	90	220V-240V AC
R.Linear 42x70-150	on-off/DALI	M/21-30-42-60W	W/145LM	90	220V-240V AC
R.Linear 42x70-180	on-off/DALI	M/21-30-42-60W	W/145LM	90	220V-240V AC
R.Linear 42x70-200	on-off/DALI	M/21-30-42-60W	W/145LM	90	220V-240V AC
R.Linear 42x70-250	on-off/DALI	M/21-30-42-60W	W/145LM	90	220V-240V AC
R.Linear 42x70-300	on-off/DALI	M/21-30-42-60W	W/145LM	90	220V-240V AC



Recessed Linear 62-109

Recessed Line

Quick info

Body: Aluminum
Paint: Electrostatic Powder
Efficiency: > 0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9


Light Distribution






Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
R.Linear 62x109-100	on-off/DALI	M/44-60W	W/145LM	90	220V-240V AC
R.Linear 62x109-120	on-off/DALI	M/44-60W	W/145LM	90	220V-240V AC
R.Linear 62x109-150	on-off/DALI	M/44-60W	W/145LM	90	220V-240V AC
R.Linear 62x109-180	on-off/DALI	M/44-60W	W/145LM	90	220V-240V AC
R.Linear 62x109-200	on-off/DALI	M/44-60W	W/145LM	90	220V-240V AC
R.Linear 62x109-250	on-off/DALI	M/44-60W	W/145LM	90	220V-240V AC
R.Linear 62x109-300	on-off/DALI	M/44-60W	W/145LM	90	220V-240V AC



Surface Linear 32-38

Surface Line



Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
S.Linear 32x38-100	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 32x38-120	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 32x38-150	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 32x38-180	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 32x38-200	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 32x38-250	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 32x38-300	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC




Surface Linear 33-60

Surface Line

Quick info

Body: Aluminum
Paint: Electrostatic Powder
Efficiency: > 0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

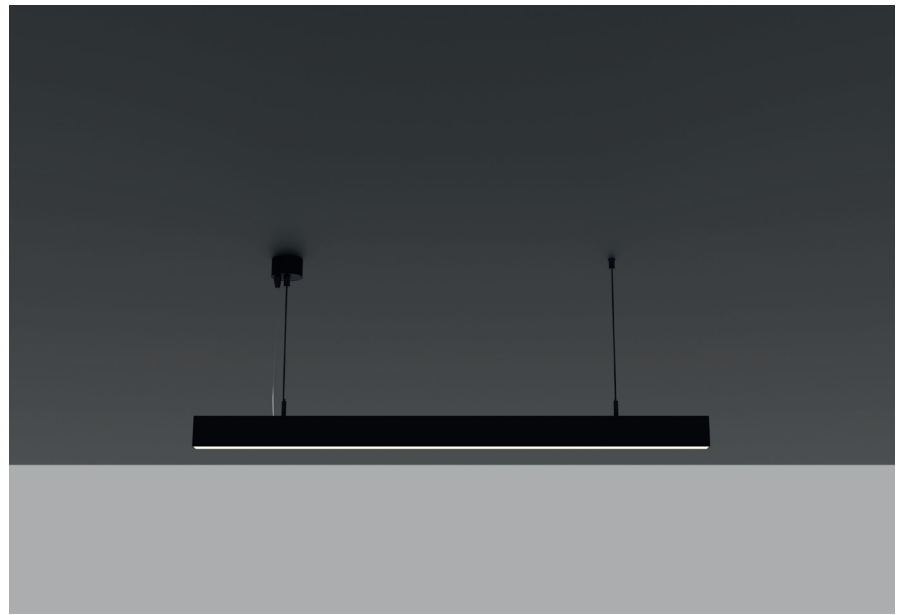

Light Distribution





Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
S.Linear 33x60-100	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 33x60-120	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 33x60-150	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 33x60-180	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 33x60-200	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 33x60-250	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 33x60-300	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC






Surface Linear 41-42


Surface Line

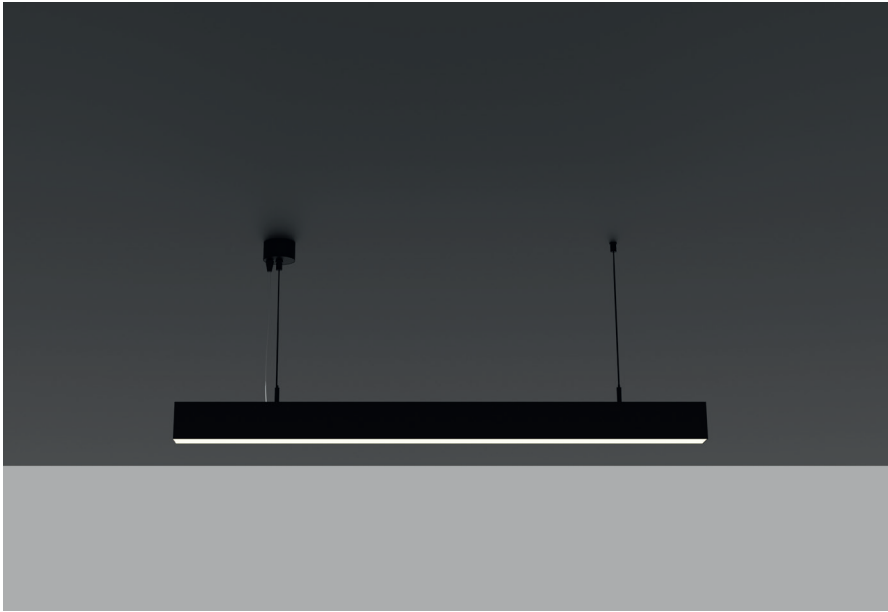

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

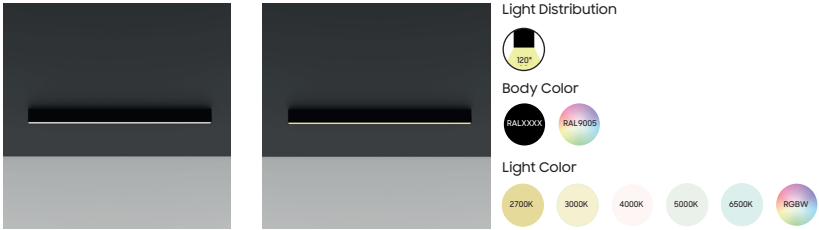

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
S.Linear 41x42-100	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 41x42-120	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 41x42-150	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 41x42-180	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 41x42-200	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 41x42-250	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 41x42-300	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC


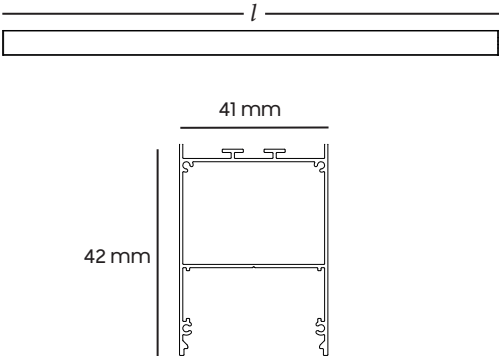


Surface Linear 45-50


Surface Line

Quick info

Body: Aluminum
Paint: Electrostatic Powder
Efficiency: > 0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

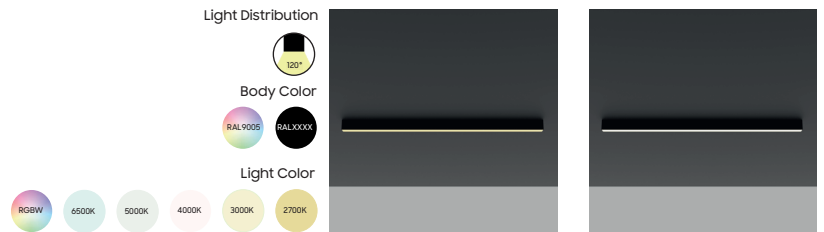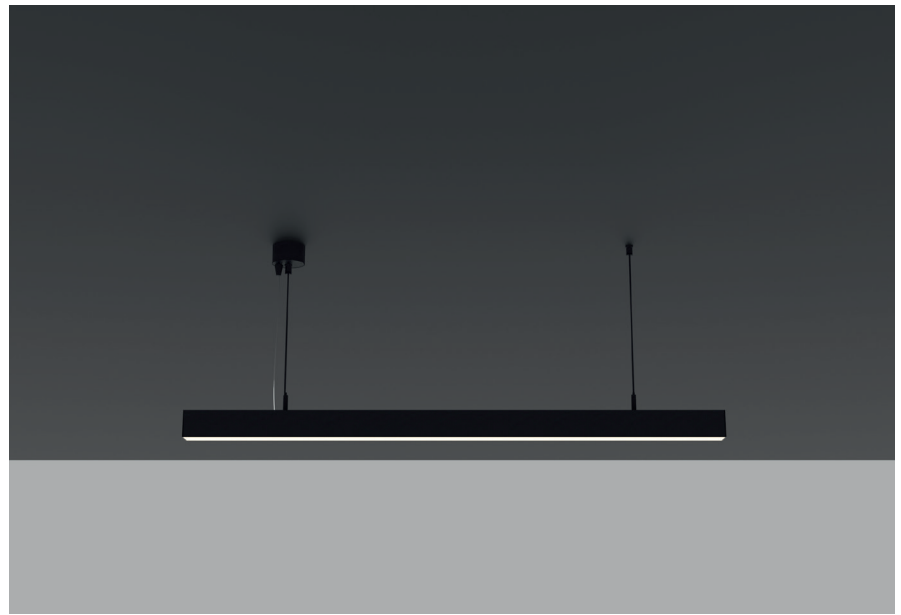


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
S.Linear 45x50-100	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 45x50-120	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 45x50-150	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 45x50-180	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 45x50-200	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 45x50-250	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 45x50-300	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC

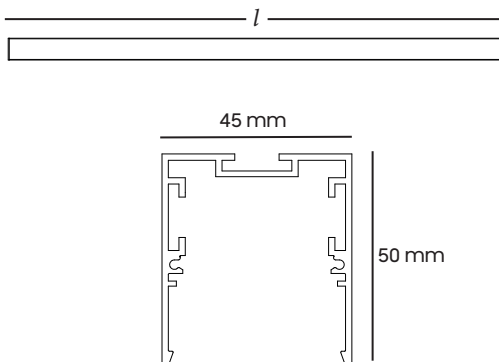

Surface Linear 53-83

Surface Line

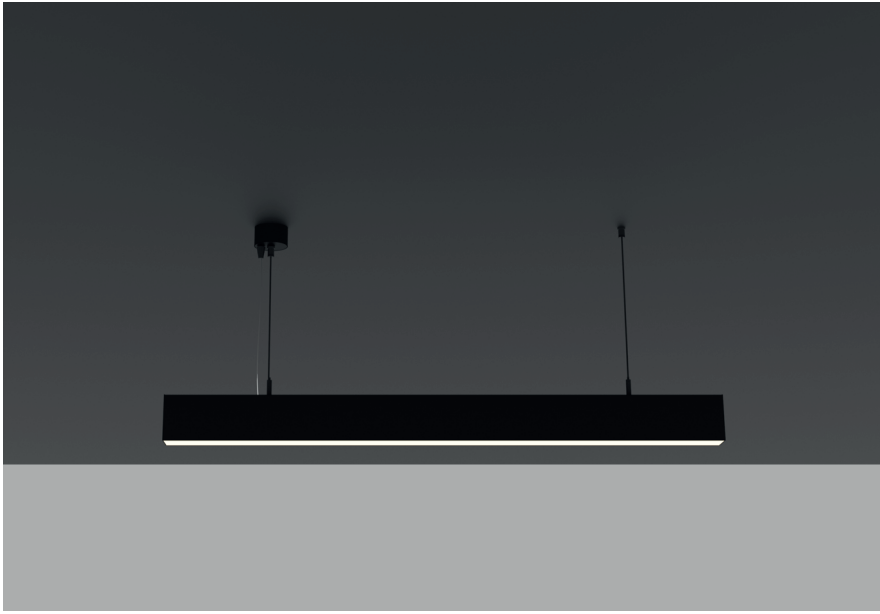

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
S.Linear 53x83-100	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 53x83-120	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 53x83-150	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 53x83-180	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 53x83-200	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 53x83-250	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 53x83-300	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC




Surface Linear 60-50



Surface Line

Quick info

Body: Aluminum
Paint: Electrostatic Powder
Efficiency: > 0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

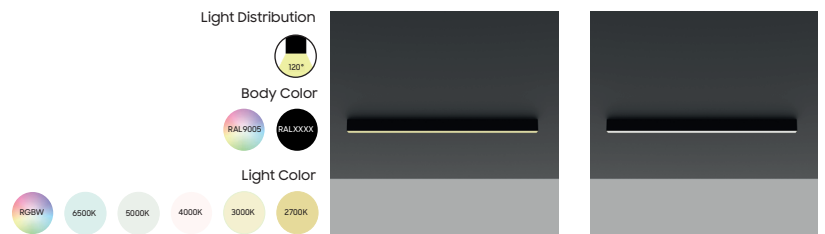


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
S.Linear 60x50-100	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 60x50-120	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 60x50-150	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 60x50-180	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 60x50-200	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 60x50-250	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 60x50-300	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC



Surface Linear 71-50

Surface Line

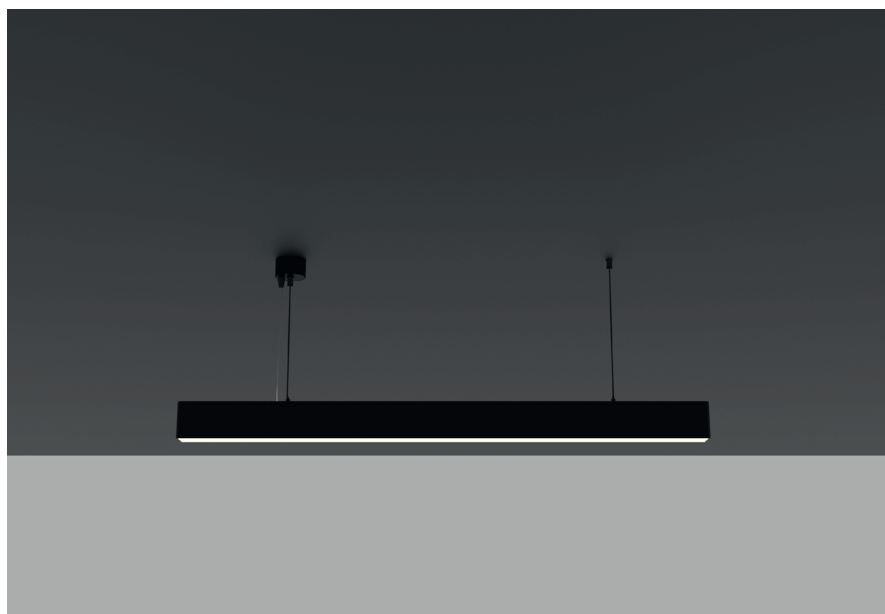

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
S.Linear 71x50-100	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 71x50-120	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 71x50-150	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 71x50-180	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 71x50-200	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 71x50-250	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC
S.Linear 71x50-300	on-off/DALI	M/21-30W	W/145LM	90	220V-240V AC

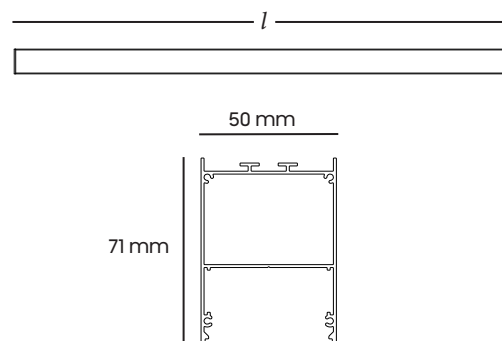

Surface Linear 87-83

Surface Line

Quick info

Body: Aluminum
 Paint: Electrostatic Powder
 Efficiency: > 0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9




Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
S.Linear 87x83-100	on-off/DALI	M/44-60W	W/145LM	90	220V-240V AC
S.Linear 87x83-120	on-off/DALI	M/44-60W	W/145LM	90	220V-240V AC
S.Linear 87x83-150	on-off/DALI	M/44-60W	W/145LM	90	220V-240V AC
S.Linear 87x83-180	on-off/DALI	M/44-60W	W/145LM	90	220V-240V AC
S.Linear 87x83-200	on-off/DALI	M/44-60W	W/145LM	90	220V-240V AC
S.Linear 87x83-250	on-off/DALI	M/44-60W	W/145LM	90	220V-240V AC
S.Linear 87x83-300	on-off/DALI	M/44-60W	W/145LM	90	220V-240V AC

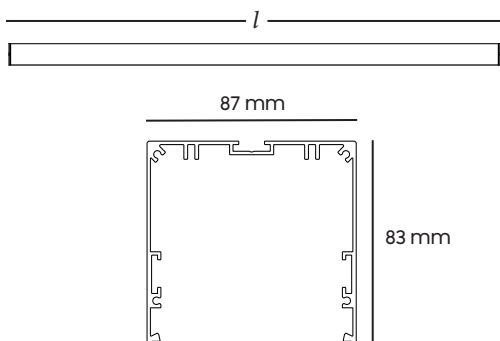

Round D

Round



Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Round D 30	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø300 x H: (50-80-100)mm
Round D 60	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø600 x H: (50-80-100)mm
Round D 90	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø900 x H: (50-80-100)mm
Round D 120	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø1200 x H: (50-80-100)mm
Round D 150	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø1500 x H: (50-80-100)mm
Round D 180	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø1800 x H: (50-80-100)mm

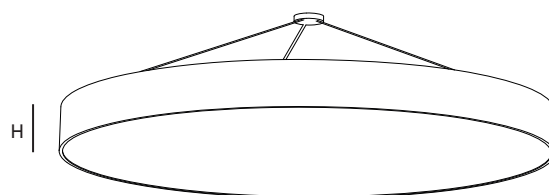

Round R

Round

Quick info

Body: Aluminum
 Paint: Electrostatic Powder
 Efficiency: > 0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Round R 30	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø300 x H: (50-80-100)mm
Round R 60	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø600 x H: (50-80-100)mm
Round R 90	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø900 x H: (50-80-100)mm
Round R 120	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø1200 x H: (50-80-100)mm
Round R 150	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø1500 x H: (50-80-100)mm
Round R 180	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø1800 x H: (50-80-100)mm

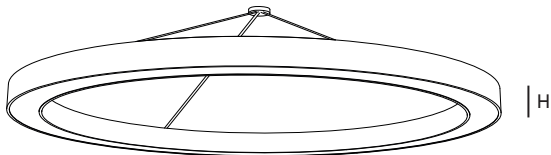

In Round

Recessed



Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9




Light Distribution

Body Color

Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
In Round 30	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø300 x 13 x H: 19mm
In Round 60	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø600 x 13 x H: 19mm
In Round 90	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø900 x 13 x H: 19mm
In Round 120	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø1200 x 13 x H: 19mm
In Round 150	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø1500 x 13 x H: 19mm
In Round 180	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø1800 x 13 x H: 19mm

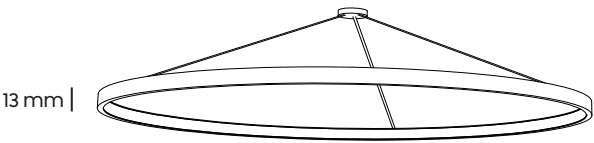

In Round Mini

Recessed



Quick info

Body: Aluminum
 Paint: Electrostatic Powder
 Efficiency: > 0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
In Round Mini 30	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø300 x 13 x H: 19mm
In Round Mini 60	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø600 x 13 x H: 19mm
In Round Mini 90	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø900 x 13 x H: 19mm
In Round Mini 120	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø1200 x 13 x H: 19mm
In Round Mini 150	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø1500 x 13 x H: 19mm
In Round Mini 180	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	Ø1800 x 13 x H: 19mm



| 13 mm



IP44

led's
see

Out Round

Recessed



Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

Light Distribution

120°


Body Color

RAL 9005 RAL 9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Out Round 30	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	300 x 13 x H:19mm
Out Round 60	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	600 x 13 x H:19mm
Out Round 90	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	900 x 13 x H:19mm
Out Round 120	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	1200 x 13 x H:19mm
Out Round 150	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	1500 x 13 x H:19mm
Out Round 180	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	1800 x 13 x H:19mm

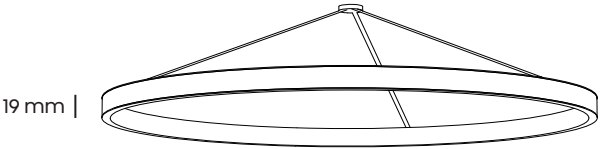

Out Round Mini

Recessed

Quick info

Body: Aluminum
Paint: Electrostatic Powder
Efficiency: > 0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Out Round Mini 30	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	300 x 13 x H:19mm
Out Round Mini 60	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	600 x 13 x H:19mm
Out Round Mini 90	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	900 x 13 x H:19mm
Out Round Mini 120	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	1200 x 13 x H:19mm
Out Round Mini 150	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	1500 x 13 x H:19mm
Out Round Mini 180	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	1800 x 13 x H:19mm




Triangle Fillet D

Triangle

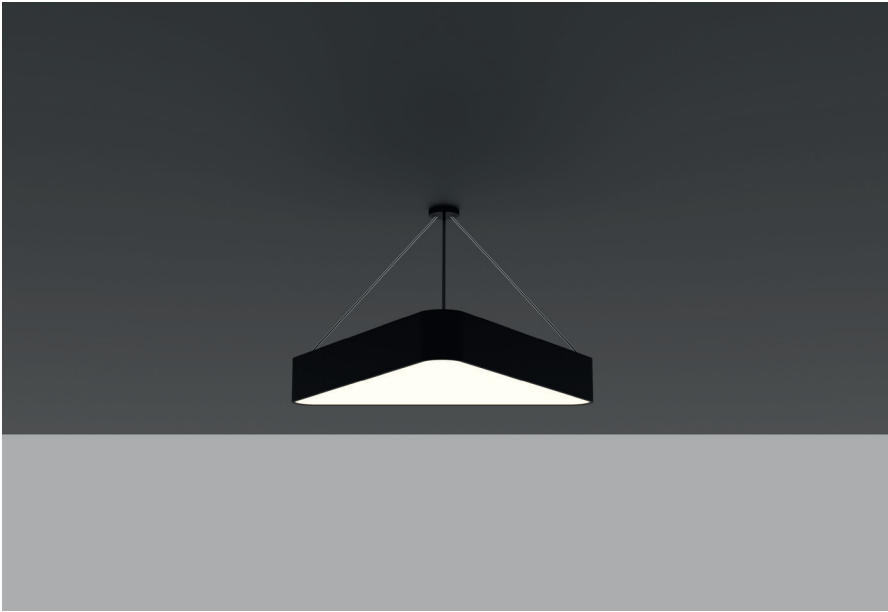

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9




Light Distribution

Body Color

Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
T.Fillet D 15	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	150mm
T.Fillet D 30	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	300mm
T.Fillet D 45	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	450mm
T.Fillet D 60	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	600mm

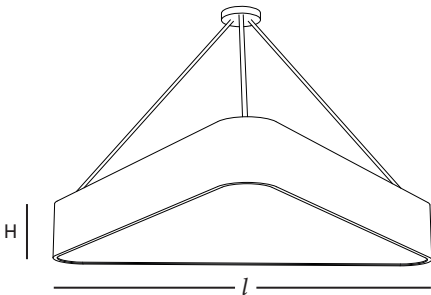

Triangle Fillet R

Triangle

Quick info

Body: Aluminum
 Paint: Electrostatic Powder
 Efficiency: > 0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9




Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
T.Fillet R 15	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	150mm
T.Fillet R 30	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	300mm
T.Fillet R 45	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	450mm
T.Fillet R 60	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	600mm

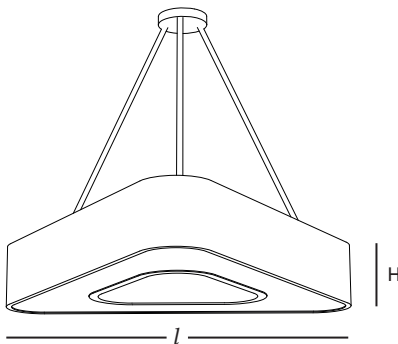

Triangle Sharp D

Triangle



Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9




Light Distribution

Body Color

Light Color


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
T.Fillet D 15	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	150mm
T.Fillet D 30	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	300mm
T.Fillet D 45	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	450mm
T.Fillet D 60	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	600mm

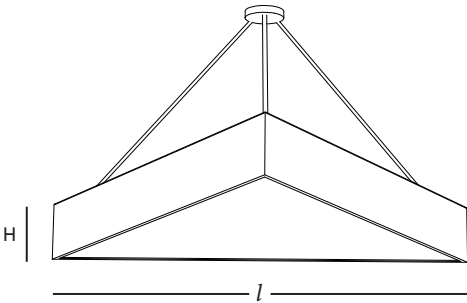

Triangle Sharp R

Triangle

Quick info
 Body: Aluminum
 Paint: Electrostatic Powder
 Efficiency: > 0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

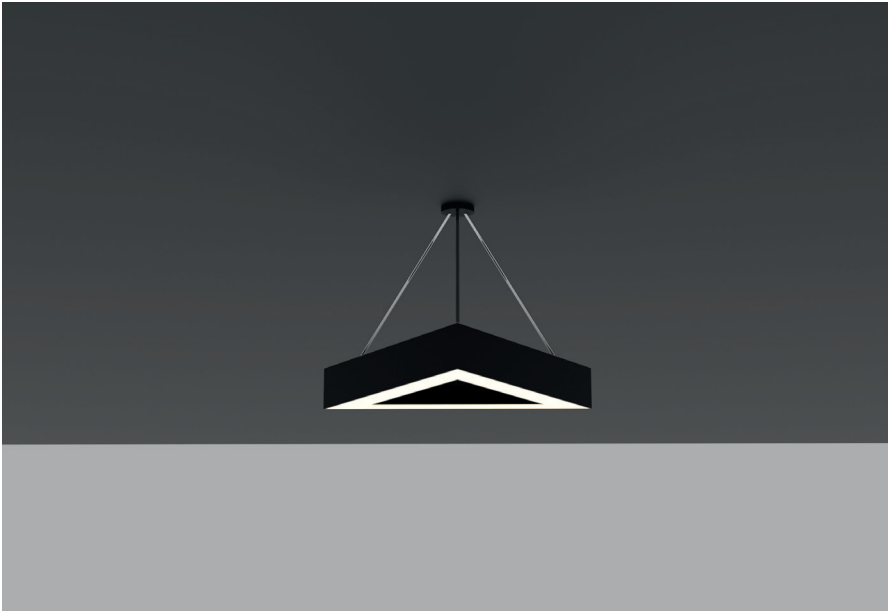

Light Distribution



120°

Body Color


 

RAL 9005 RAL XXXX


Light Color

RGBW 6500K 5000K 4000K 3000K 2700K

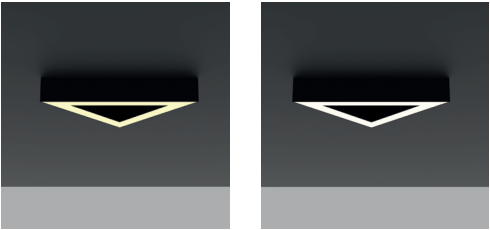


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
T.Sharp R 30	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	300mm
T.Sharp R 45	on-off/DALI	28-40W	W/145LM	90	220V-240V AC	450mm
T.Sharp R 60	on-off/DALI	44-60W	W/145LM	90	220V-240V AC	600mm

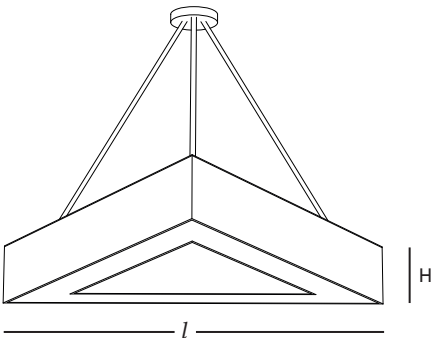

Square Fillet D

Square

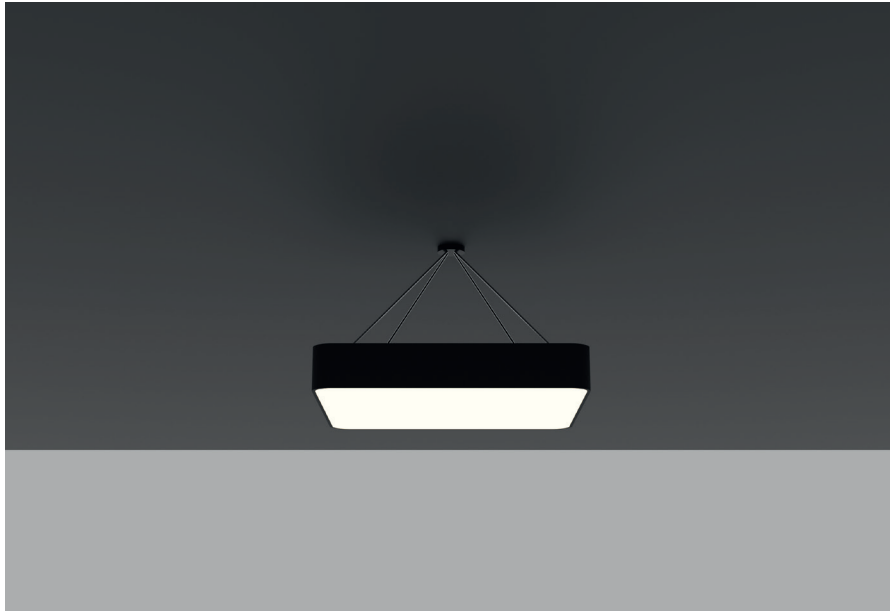


Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

Light Distribution

Body Color


Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
S.Fillet D 30	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	300 x 300 x H: 50-80-100mm
S.Fillet D 60	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	600 x 600 x H: 50-80-100mm
S.Fillet D 90	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	900 x 900 x H: 50-80-100mm
S.Fillet D 120	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	1200 x 1200 x H: 50-80-100mm

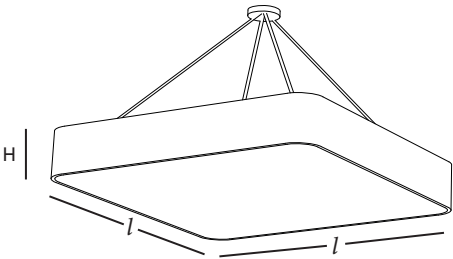

Square Fillet R

Square

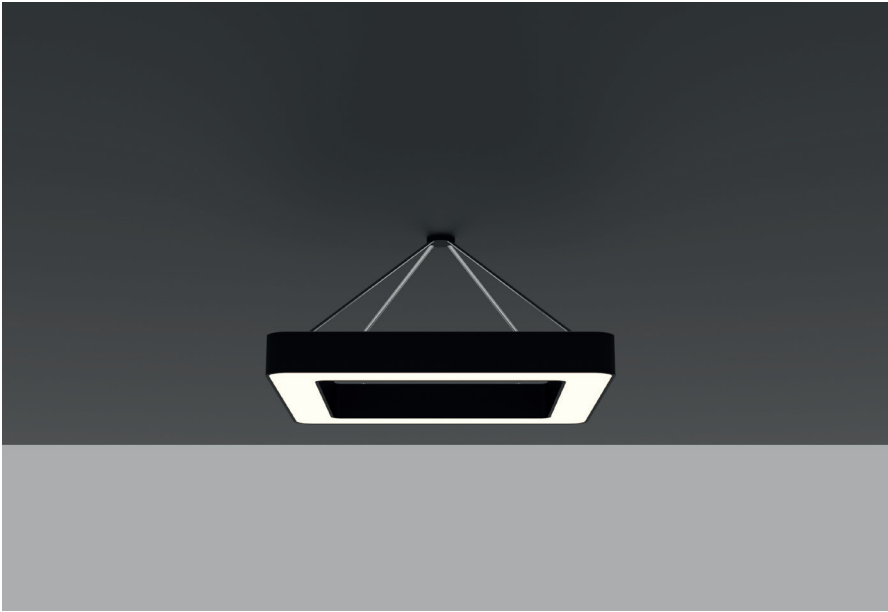

Quick info

Body: Aluminum
 Paint: Electrostatic Powder
 Efficiency: > 0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
S.Fillet R 30	on-off/DALI	25-36W	W/145LM	90	220V-240V AC	300 x 300 x H: 50-80-100mm
S.Fillet R 60	on-off/DALI	50-72W	W/145LM	90	220V-240V AC	600 x 600 x H: 50-80-100mm
S.Fillet R 90	on-off/DALI	75-108W	W/145LM	90	220V-240V AC	900 x 900 x H: 50-80-100mm
S.Fillet R 120	on-off/DALI	100-144W	W/145LM	90	220V-240V AC	1200 x 1200 x H: 50-80-100mm

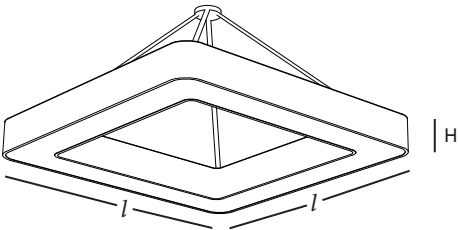

Square Sharp D

Square

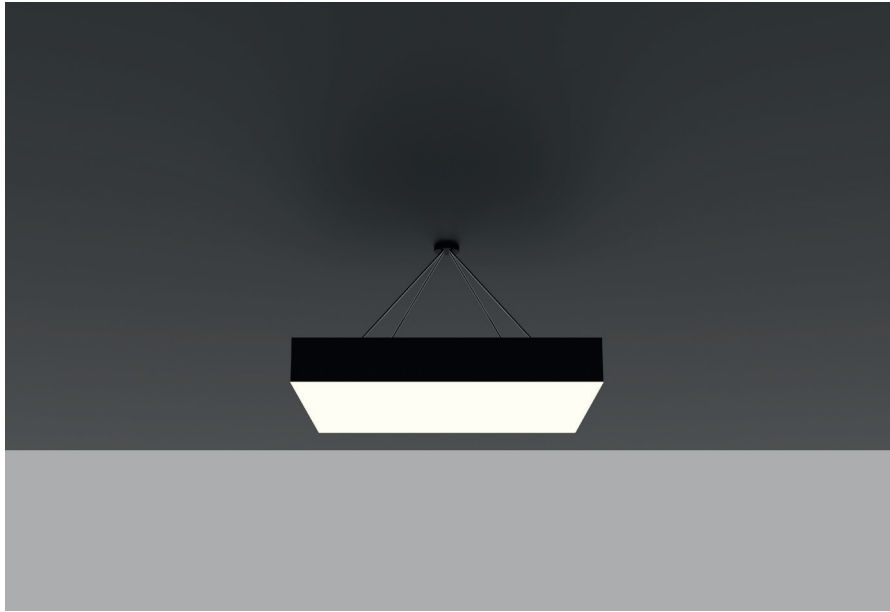

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9




Light Distribution

Body Color

Light Color


300 x 300 x H: 50-80-100mm
600 x 600 x H: 50-80-100mm
900 x 900 x H: 50-80-100mm
1200 x 1200 x H: 50-80-100mm

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
S. Sharp D 30	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	300 x 300 x H: 50-80-100mm
S. Sharp D 60	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	600 x 600 x H: 50-80-100mm
S. Sharp D 90	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	900 x 900 x H: 50-80-100mm
S. Sharp D 120	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	1200 x 1200 x H: 50-80-100mm

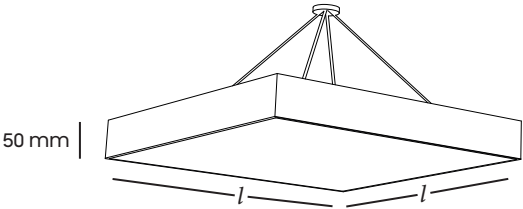

Square Sharp R

Square

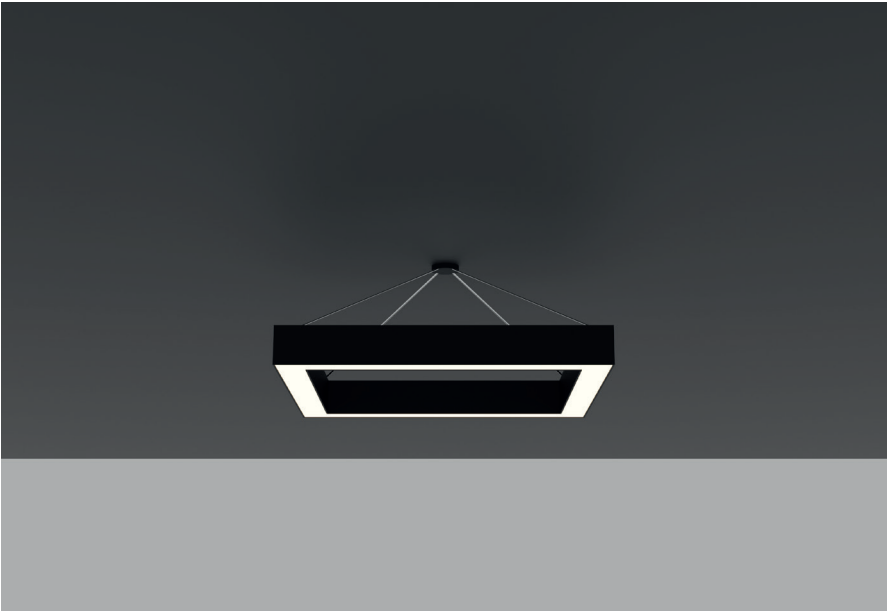

Quick info

Body: Aluminum
 Paint: Electrostatic Powder
 Efficiency: > 0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9


Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
S. Sharp R 30	on-off/DALI	25-36W	W/145LM	90	220V-240V AC	300 x 300 x H: 50-80-100mm
S. Sharp R 60	on-off/DALI	50-72W	W/145LM	90	220V-240V AC	600 x 600 x H: 50-80-100mm
S. Sharp R 90	on-off/DALI	75-108W	W/145LM	90	220V-240V AC	900 x 900 x H: 50-80-100mm
S. Sharp R 120	on-off/DALI	100-144W	W/145LM	90	220V-240V AC	1200 x 1200 x H: 50-80-100mm

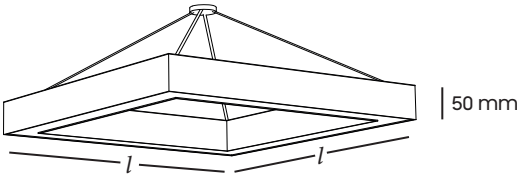

Rectangle Fillet D

Rectangle

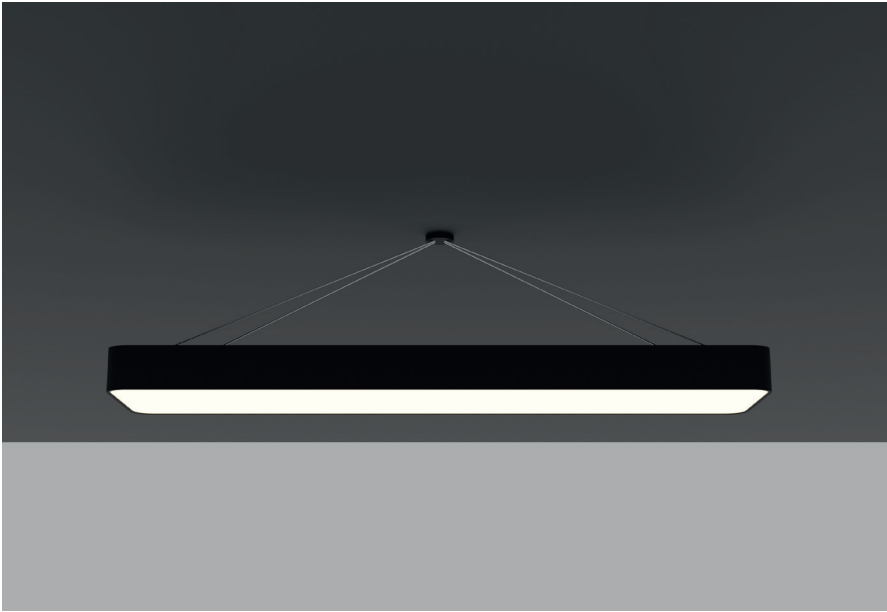

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

Light Distribution

120°


Body Color

RAL9005 RAL9005

Light Color


2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
R. Fillet D 3012	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	300 x 1200 x H: 50-80-100mm
R. Fillet D 3015	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	300 x 1500 x H: 50-80-100mm
R. Fillet D 3018	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	300 x 1800 x H: 50-80-100mm
R. Fillet D 6012	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	600 x 1200 x H: 50-80-100mm
R. Fillet D 6015	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	600 x 1500 x H: 50-80-100mm
R. Fillet D 6018	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	600 x 1800 x H: 50-80-100mm

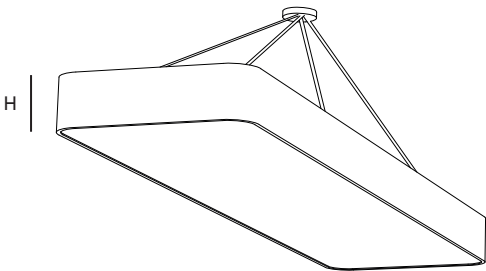

Rectangle Fillet R

Rectangle

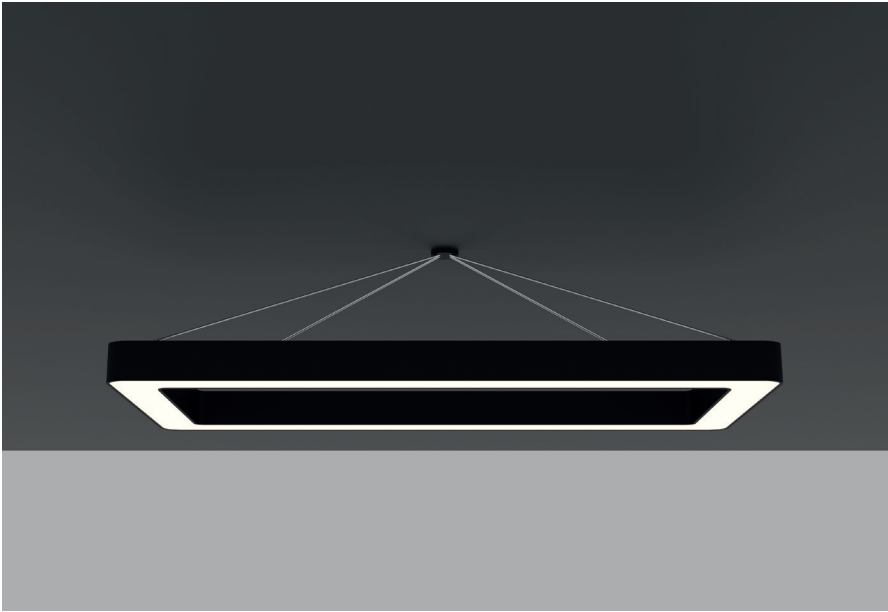

Quick info

Body: Aluminum
 Paint: Electrostatic Powder
 Efficiency: > 0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
R. Fillet R 3012	on-off/DALI	63-90W	W/145LM	90	220V-240V AC	300 x 1200 x H: 50-80-100mm
R. Fillet R 3015	on-off/DALI	76-108W	W/145LM	90	220V-240V AC	300 x 1500 x H: 50-80-100mm
R. Fillet R 3018	on-off/DALI	89-126W	W/145LM	90	220V-240V AC	300 x 1800 x H: 50-80-100mm
R. Fillet R 6012	on-off/DALI	76-108W	W/145LM	90	220V-240V AC	600 x 1200 x H: 50-80-100mm
R. Fillet R 6015	on-off/DALI	89-126W	W/145LM	90	220V-240V AC	600 x 1500 x H: 50-80-100mm
R. Fillet R 6018	on-off/DALI	100-144W	W/145LM	90	220V-240V AC	600 x 1800 x H: 50-80-100mm

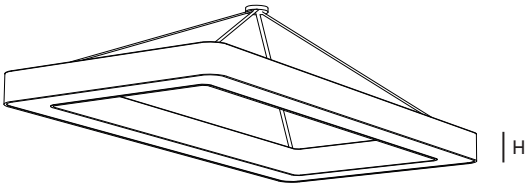

Rectangle Sharp D

Rectangle

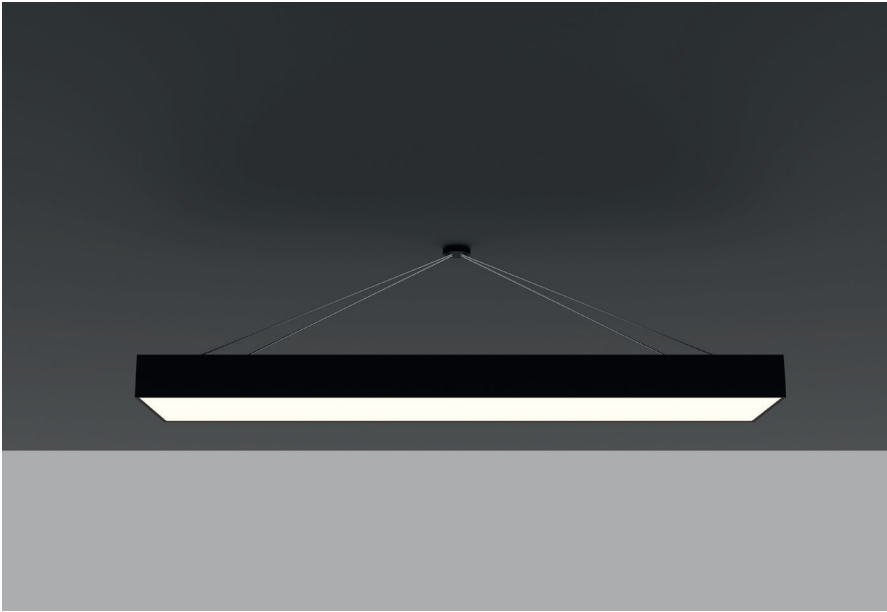

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9




Light Distribution

Body Color

Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
R. Sharp D 3012	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	300 x 1200 x H: 50-80-100mm
R. Sharp D 3015	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	300 x 1500 x H: 50-80-100mm
R. Sharp D 3018	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	300 x 1800 x H: 50-80-100mm
R. Sharp D 6012	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	600 x 1200 x H: 50-80-100mm
R. Sharp D 6015	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	600 x 1500 x H: 50-80-100mm
R. Sharp D 6018	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	600 x 1800 x H: 50-80-100mm

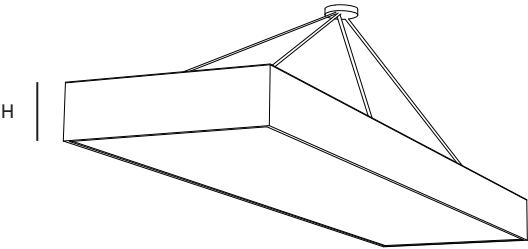

Rectangle Sharp R

Rectangle

Quick info

Body: Aluminum
 Paint: Electrostatic Powder
 Efficiency: > 0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9




Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
R. Sharp R 3012	on-off/DALI	63-90W	W/145LM	90	220V-240V AC	300 x 1200 x H: 50-80-100mm
R. Sharp R 3015	on-off/DALI	76-108W	W/145LM	90	220V-240V AC	300 x 1500 x H: 50-80-100mm
R. Sharp R 3018	on-off/DALI	89-126W	W/145LM	90	220V-240V AC	300 x 1800 x H: 50-80-100mm
R. Sharp R 6012	on-off/DALI	76-108W	W/145LM	90	220V-240V AC	600 x 1200 x H: 50-80-100mm
R. Sharp R 6012	on-off/DALI	89-126W	W/145LM	90	220V-240V AC	600 x 1500 x H: 50-80-100mm
R. Sharp R 6015	on-off/DALI	100-144W	W/145LM	90	220V-240V AC	600 x 1800 x H: 50-80-100mm

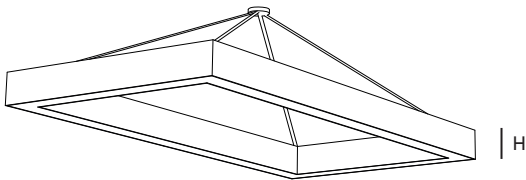

Hexagon Fillet D

Hexagon



Quick Info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9




Light Distribution

Body Color

Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
H. Fillet D 15	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	L: 150 x 150 x 150 x H: 50-80-100mm
H. Fillet D 30	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	L: 300 x 300 x 300 x H: 50-80-100mm
H. Fillet D 45	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	L: 450 x 450 x 450 x H: 50-80-100mm

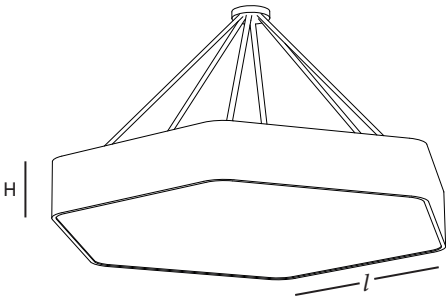


Hexagon Fillet R

Hexagon

Quick Info

Body: Aluminum
 Paint: Electrostatic Powder
 Efficiency: > 0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

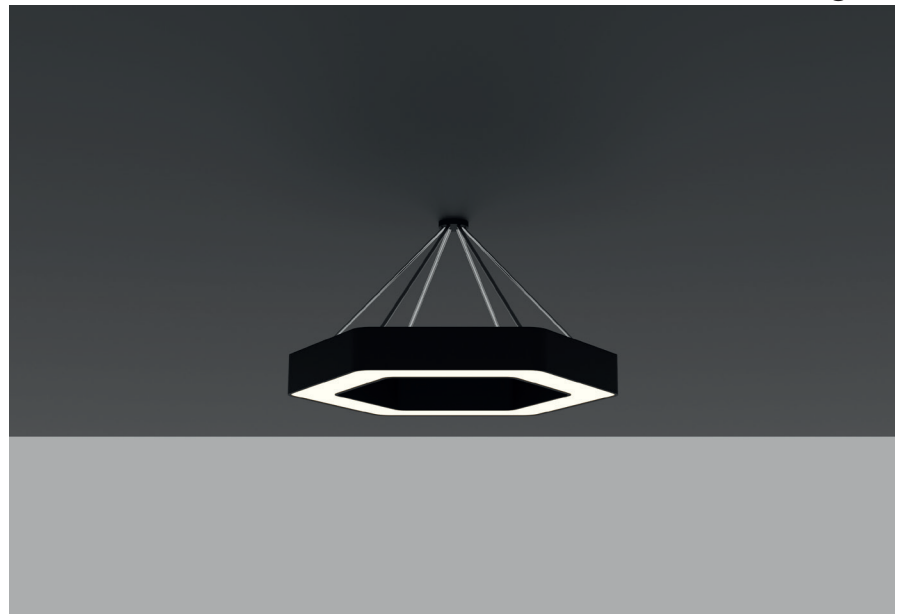

Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
H. Fillet R 15	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	L: 150 x 150 x 150 x H: 50-80-100mm
H. Fillet R 30	on-off/DALI	42-60W	W/145LM	90	220V-240V AC	L: 300 x 300 x 300 x H: 50-80-100mm
H. Fillet R 45	on-off/DALI	63-90W	W/145LM	90	220V-240V AC	L: 450 x 450 x 450 x H: 50-80-100mm

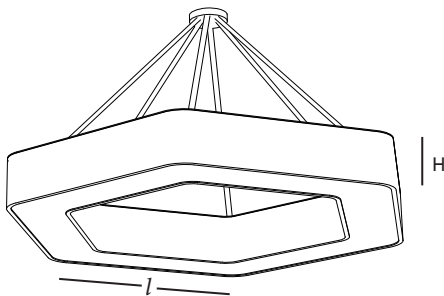


Hexagon Sharp D


Hexagon



Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

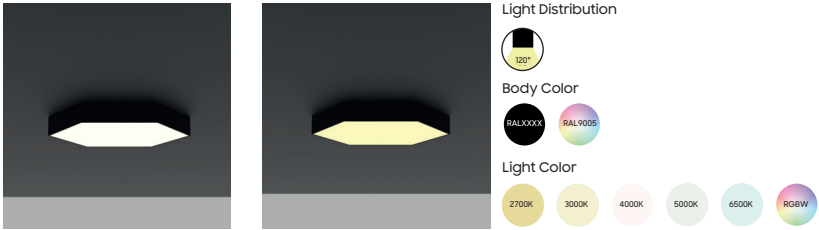

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
H. Sharp D 15	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	L: 150 x 150 x 150 x H: 50-80-100mm
H. Sharp D 30	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	L: 300 x 300 x 300 x H: 50-80-100mm
H. Sharp D 45	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	L: 450 x 450 x 450 x H: 50-80-100mm

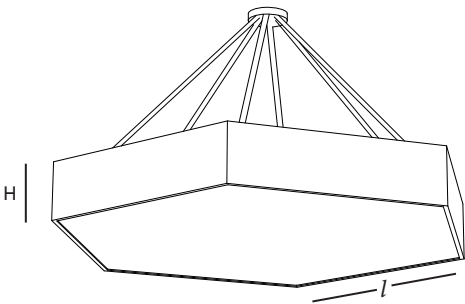


Hexagon Sharp R

Hexagon

Quick info

Body: Aluminum
 Paint: Electrostatic Powder
 Efficiency: > 0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

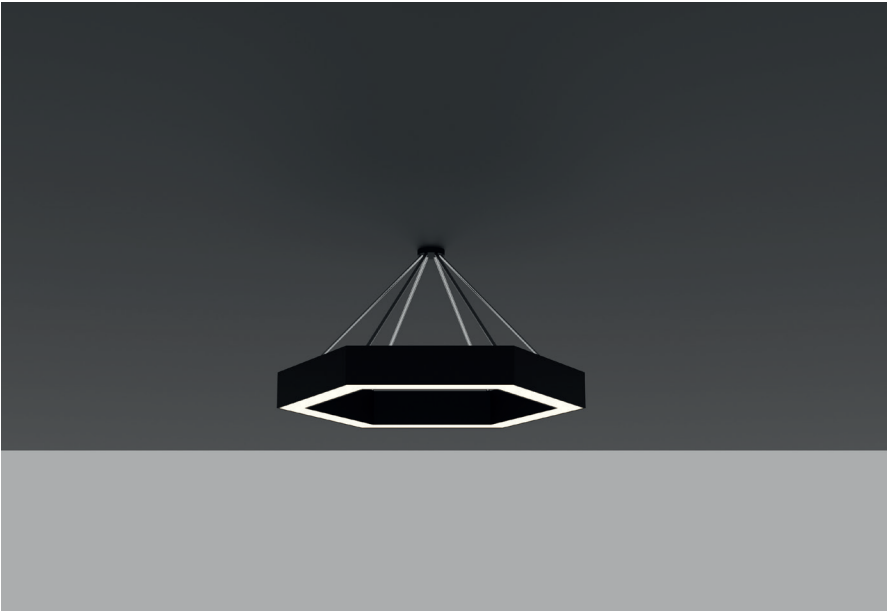

Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
H. Sharp R 15	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	L: 150 x 150 x 150 x H: 50-80-100mm
H. Sharp R 30	on-off/DALI	42-60W	W/145LM	90	220V-240V AC	L: 300 x 300 x 300 x H: 50-80-100mm
H. Sharp R 45	on-off/DALI	63-90W	W/145LM	90	220V-240V AC	L: 450 x 450 x 450 x H: 50-80-100mm

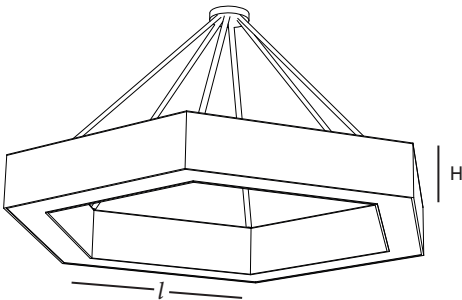

Yoyo Fillet

Design

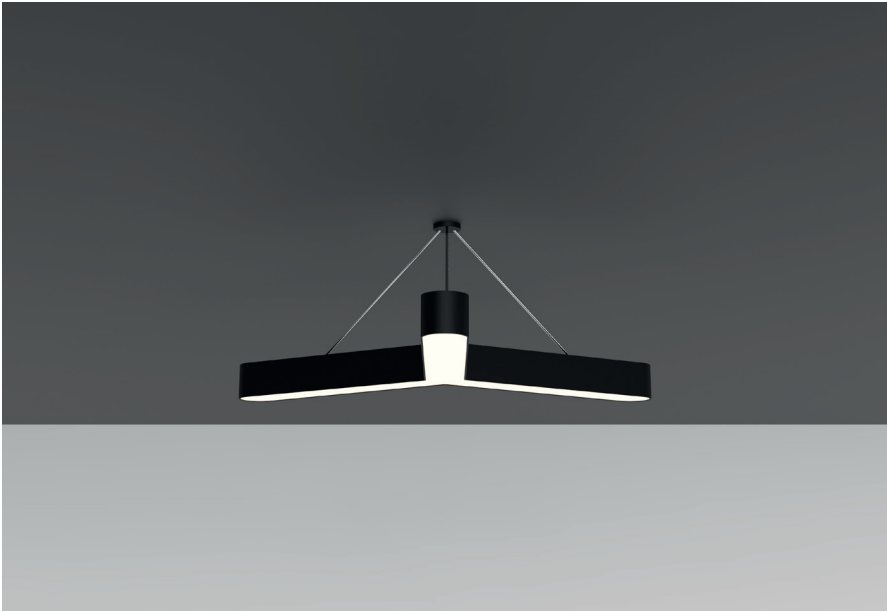

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9




Light Distribution

Body Color

Light Color


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Y. Fillet 30	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	L: 300 x 300 x 300 x H: 50-80-100mm
Y. Fillet 45	on-off/DALI	28-40W	W/145LM	90	220V-240V AC	L: 450 x 450 x 450 x H: 50-80-100mm
Y. Fillet 60	on-off/DALI	42-60W	W/145LM	90	220V-240V AC	L: 600 x 600 x 600 x H: 50-80-100mm

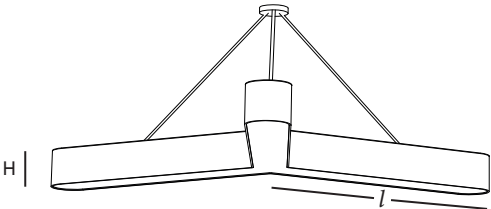

Yoyo Sharp Design

Quick info

Body: Aluminum
 Paint: Electrostatic Powder
 Efficiency: > 0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

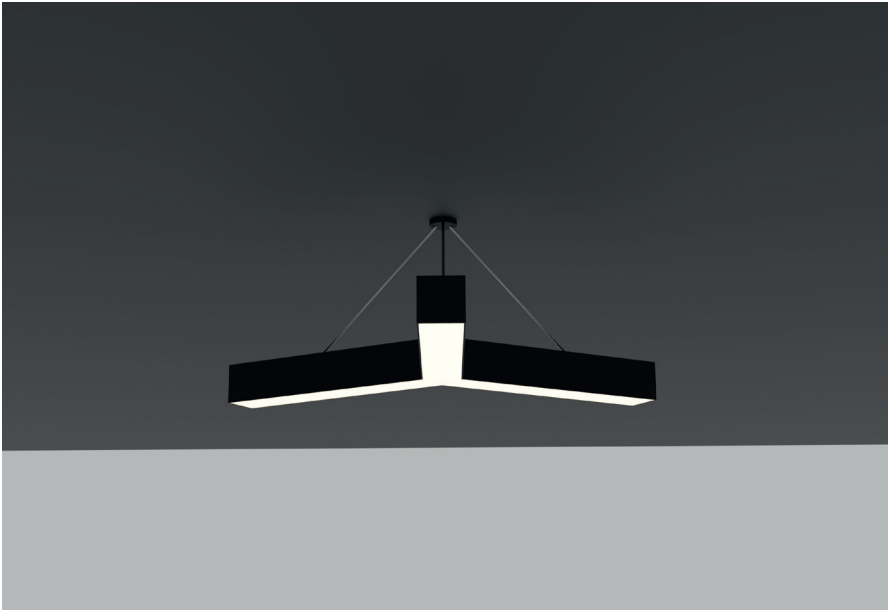



Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Y. Sharp 30	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	L: 300 x 300 x 300 x H: 50-80-100mm
Y. Sharp 45	on-off/DALI	28-60W	W/145LM	90	220V-240V AC	L: 450 x 450 x 450 x H: 50-80-100mm
Y. Sharp 60	on-off/DALI	42-90W	W/145LM	90	220V-240V AC	L: 600 x 600 x 600 x H: 50-80-100mm

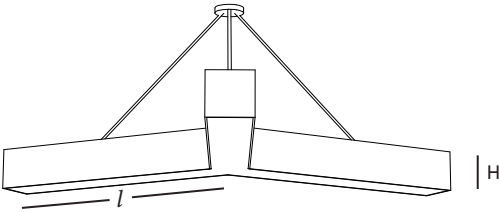

Line Fillet

Design

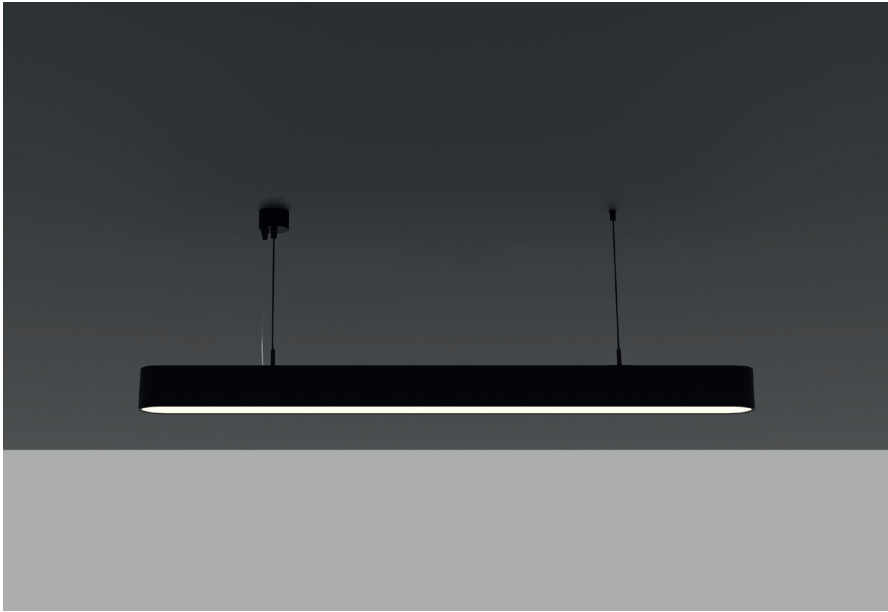

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9





Light Distribution


Body Color

Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Line Fillet	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	L: 90 x 120 x H: 50-80-100mm
Line Fillet	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	L: 150 x 180 x 450 x H: 50-80-100mm

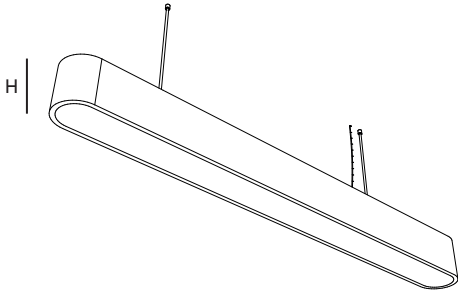

Tuxedo Design

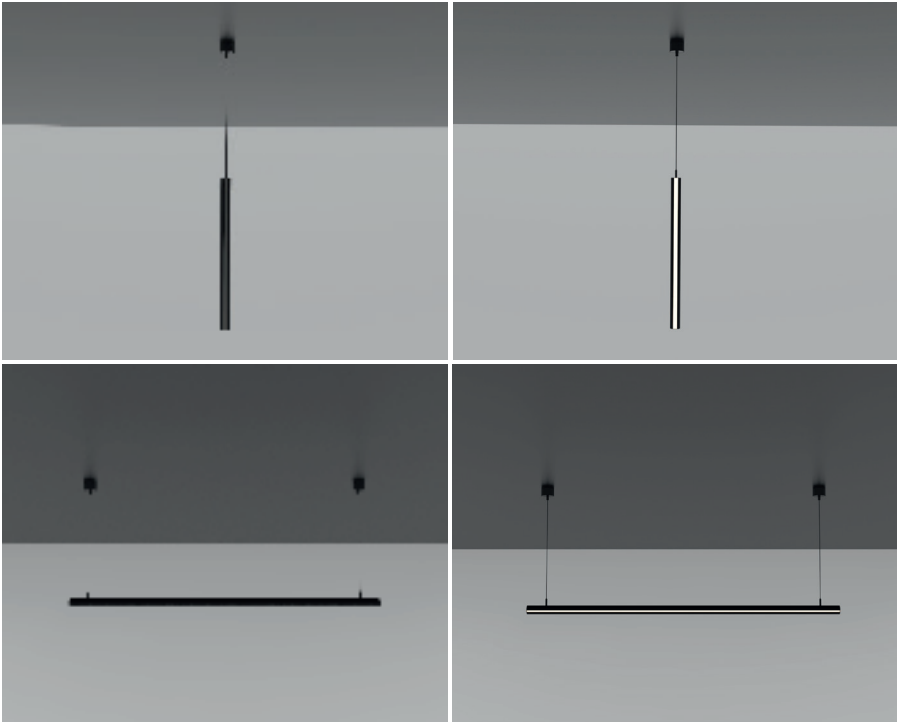

Quick info

Body: Aluminum
 Paint: Electrostatic Powder
 Efficiency: > 0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9


Light Distribution



Body Color




Light Color

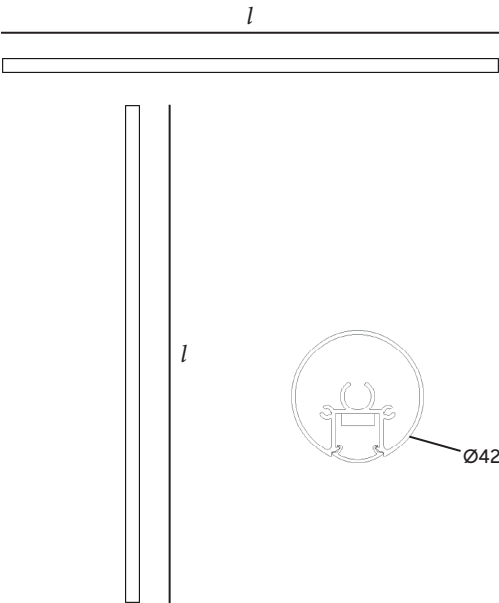

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Tuxedo 100	on-off/DALI	21-30W	W/145LM	90	220V-240V AC
Tuxedo 120	on-off/DALI	21-30W	W/145LM	90	220V-240V AC
Tuxedo 150	on-off/DALI	21-30W	W/145LM	90	220V-240V AC
Tuxedo 180	on-off/DALI	21-30W	W/145LM	90	220V-240V AC
Tuxedo 200	on-off/DALI	21-30W	W/145LM	90	220V-240V AC
Tuxedo 250	on-off/DALI	21-30W	W/145LM	90	220V-240V AC
Tuxedo 300	on-off/DALI	21-30W	W/145LM	90	220V-240V AC

Blade Line

Blade Line

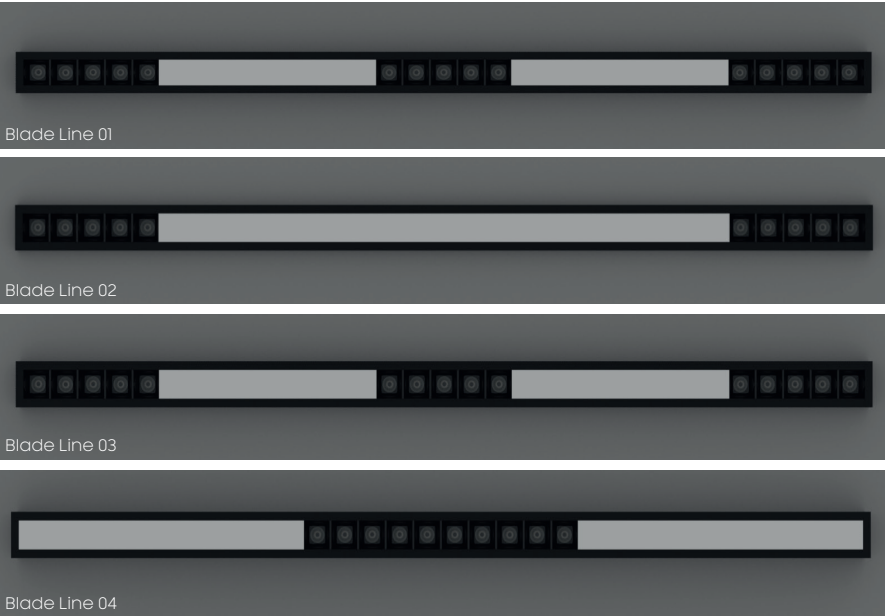



Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

Light Distribution

Body Color


Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Blade Line 01	on-off/DALI	40-60W	W/175LM	90	220V-240V AC	1000 x 32.6mm
Blade Line 02	on-off/DALI	40-60W	W/175LM	90	220V-240V AC	1000 x 32.6mm
Blade Line 03	on-off/DALI	40-60W	W/175LM	90	220V-240V AC	1000 x 32.6mm
Blade Line 04	on-off/DALI	40-60W	W/175LM	90	220V-240V AC	1000 x 32.6mm

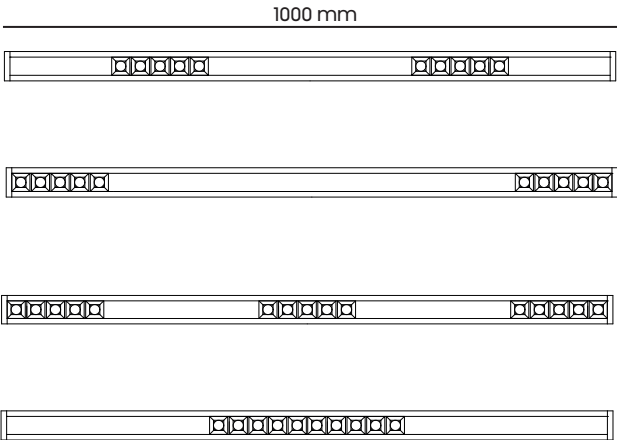

Blade Line SM

Blade Line

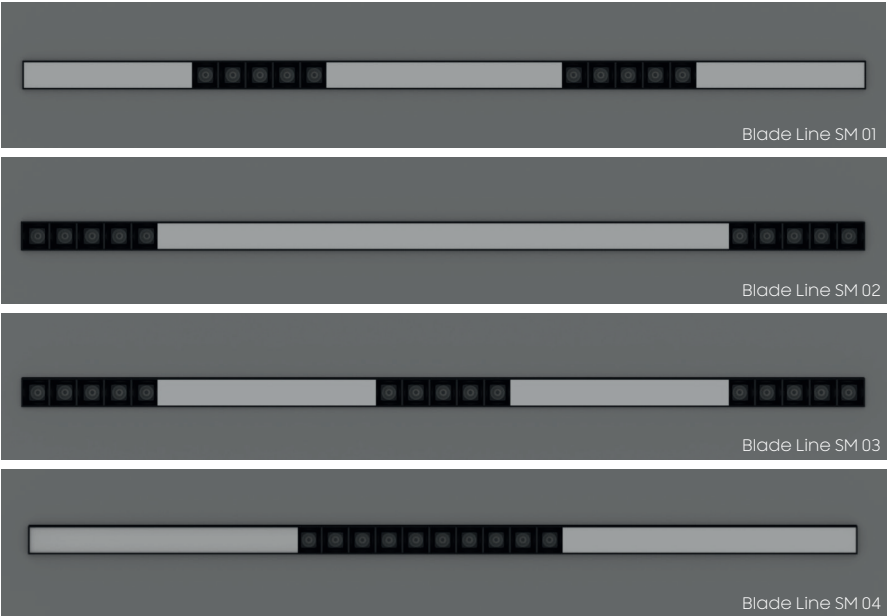

Quick Info

Body: Aluminum
 Paint: Electrostatic Powder
 Efficiency: > 0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9


Light Distribution





Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Blade Line SM 01	on-off/DALI	40-60W	W/175LM	90	220V-240V AC	1000 x 75mm
Blade Line SM 02	on-off/DALI	40-60W	W/175LM	90	220V-240V AC	1000 x 75mm
Blade Line SM 03	on-off/DALI	40-60W	W/175LM	90	220V-240V AC	1000 x 75mm
Blade Line SM 04	on-off/DALI	40-60W	W/175LM	90	220V-240V AC	1000 x 75mm

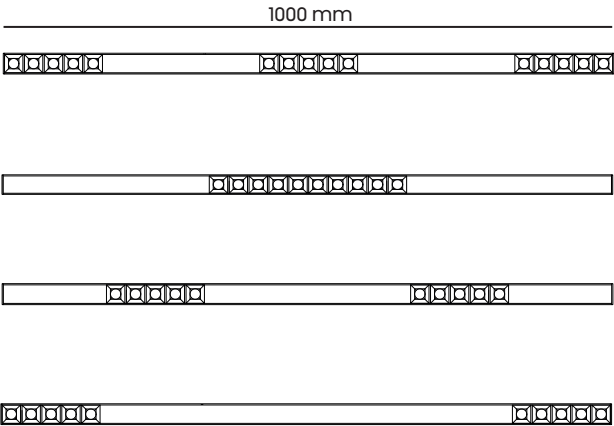

Blade Line Trimless

Blade Line

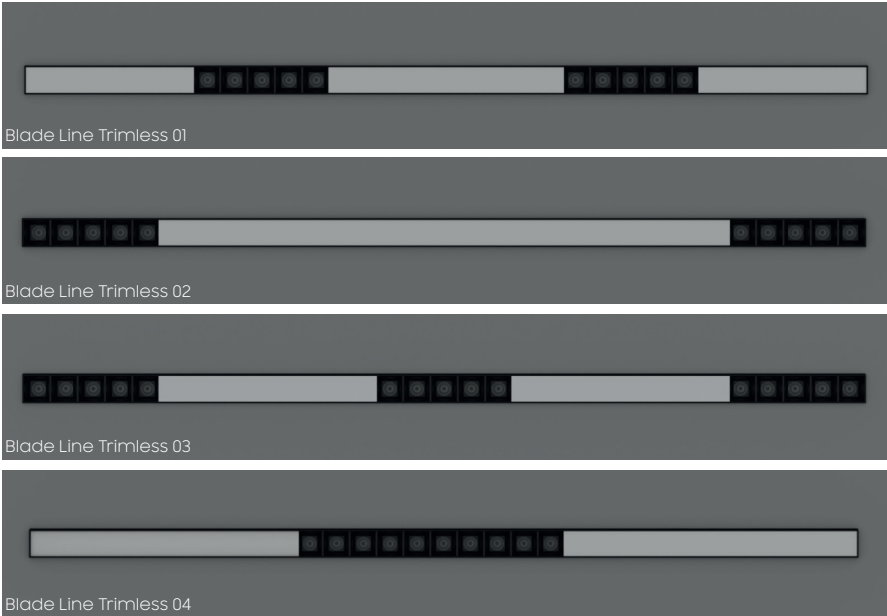

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

Light Distribution

Body Color

Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Blade Line Trimless 01	on-off/DALI	40-60W	W/175LM	90	220V-240V AC	1000 x 75mm
Blade Line Trimless 02	on-off/DALI	40-60W	W/175LM	90	220V-240V AC	1000 x 75mm
Blade Line Trimless 03	on-off/DALI	40-60W	W/175LM	90	220V-240V AC	1000 x 75mm
Blade Line Trimless 04	on-off/DALI	40-60W	W/175LM	90	220V-240V AC	1000 x 75mm







IMAGE Recessed

Quick Info

Body: Aluminum
 Paint: Electrostatic Powder
 Efficiency: > 0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

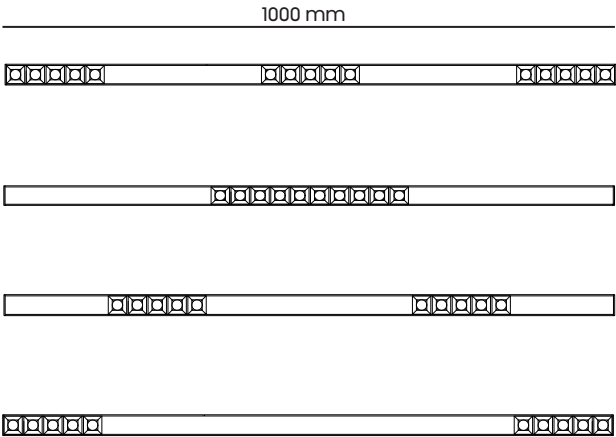

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
In Round 30	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	300 x H:(13-19) mm
In Round 60	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	600 x H:(13-19) mm
In Round 90	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	900 x H:(13-19) mm
In Round 120	on-off/DALI	21-30W	W/145LM	90	220V-240V AC	1200 x H:(13-19) mm



Trim 01

Trim



Quick Info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

Light Distribution

120°



Body Color

RAL 9005 RAL 9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Trim 01	on-off/DALI	10-20W	W/175LM	90	220V-240V AC	1000 x 12.4mm




Trim 35S

Trim





Quick Info

Body: Aluminum
 Paint: Electrostatic Powder
 Efficiency: > 0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

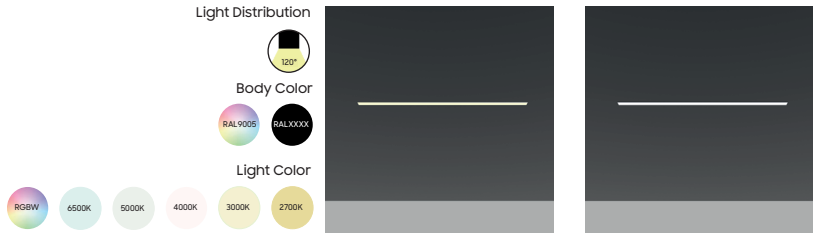

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Trim 35S	on-off/DALI	10-20W	W/175LM	90	220V-240V AC	1000 x 12.4mm



Trim 35

Trim



Quick Info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9





Light Distribution

Body Color

Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Trim 35	on-off/DALI	20-30W	W/175LM	90	220V-240V AC	1000 x 22.5mm

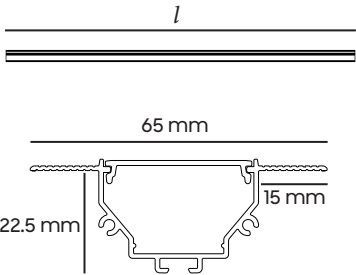

Trim 50S

Trim



Quick Info

Body: Aluminum
 Paint: Electrostatic Powder
 Efficiency: > 0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

Light Distribution





Body Color









Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Trim 50S	on-off/DALI	20-44W	W/175LM	90	220V-240V AC	1000 x 12.4mm

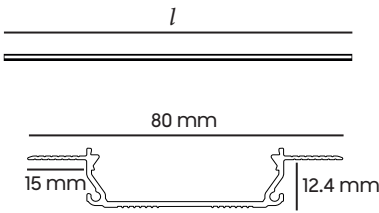

OUTDOOR





WALL MOUNTED							
	BLOSSOM 01						
LINE							
	SEE LINE S 02	SEE LINE M 03					
WALLWASHER							
	WALL 3 04	WALL 6 04	WALL 9 04	WALL 12 04	WALL 18 04	WALL 24 04	WALL 36 04
							
	MINI WALL 3 05	MINI WALL 6 05	MINI WALL 9 05	MINI WALL 12 05	MINI WALL 18 05	MINI WALL 24 05	MINI WALL 36 05
							
	REC. WALL 03 06	REC. WALL 06 06	REC. WALL 09 06	REC. WALL 12 06	REC. WALL 18 06	REC. WALL 24 06	REC. WALL 36 06
MINI WALLWASHER							
RECESSED WALLWASHER							

Blossom


Wall Mounted

Quick info

Body: Aluminum
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

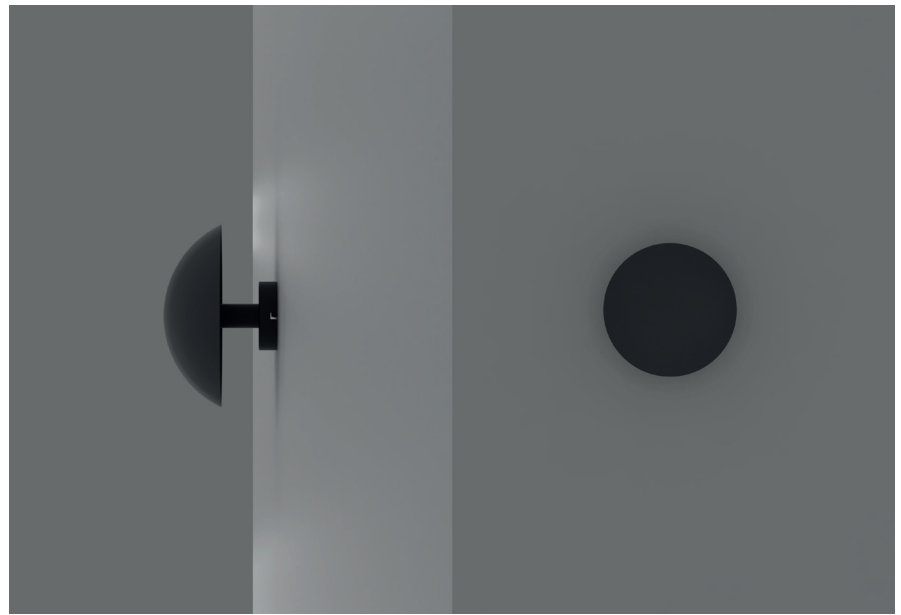

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blossom	on-off/DALI	6-18W	W/110LM	90	220V-240V AC

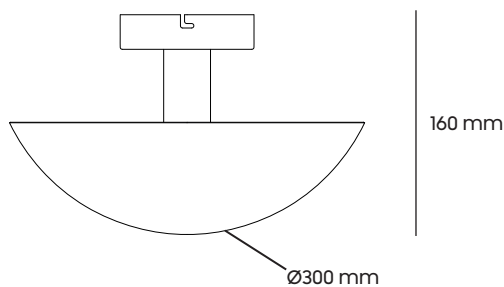

See Line S

Line



Quick info

Body: Aluminum
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
See Line S	on-off/DALI	4,8-18W	W/130LM	90	24V

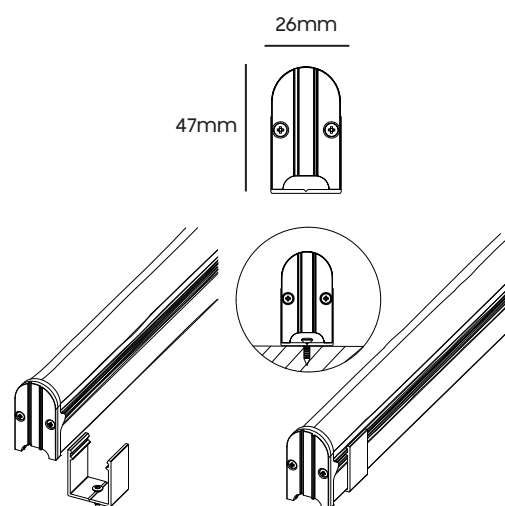


See Line M

Line

Quick info

Body: Aluminum
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

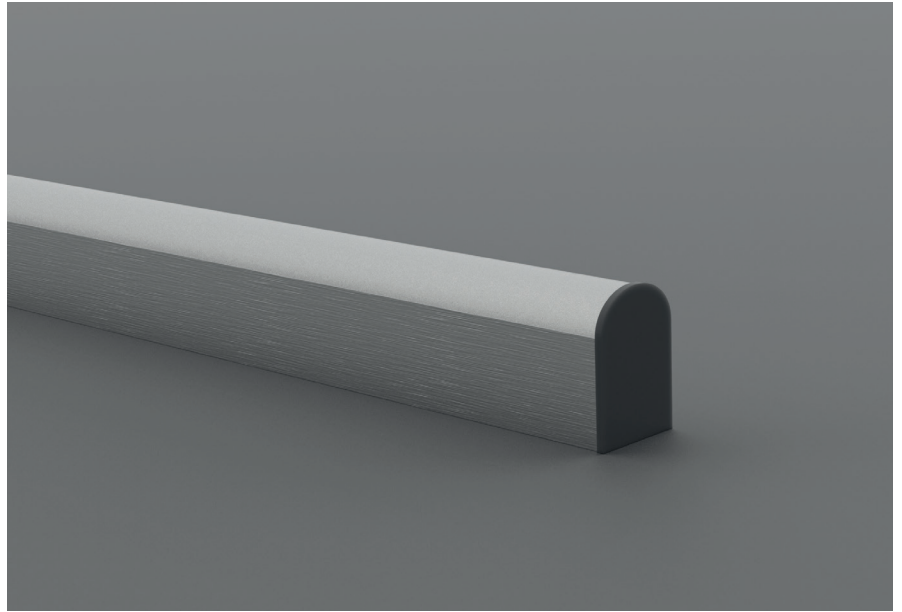


Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
See Line M	on-off/DALI	12-30W	W/130LM	90	24V

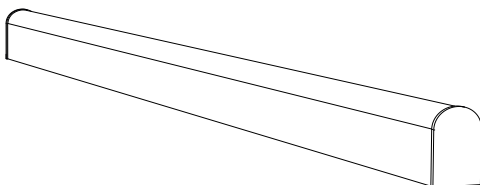

Wallwasher

Wallwasher



Wallwasher 3



Wallwasher 6



Wallwasher 9



Wallwasher 12



Wallwasher 18



Wallwasher 24



Wallwasher 36

Quick Info

Body: Aluminum
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Wallwasher 3	on-off/DALI	7W	W/1225LM	90	220V-240V AC /24V DC	120mm
Wallwasher 6	on-off/DALI	14W	W/2450LM	90	220V-240V AC /24V DC	200mm
Wallwasher 9	on-off/DALI	20W	W/3500LM	90	220V-240V AC /24V DC	300mm
Wallwasher 12	on-off/DALI	27W	W/4725LM	90	220V-240V AC /24V DC	350mm
Wallwasher 18	on-off/DALI	40W	W/7000LM	90	220V-240V AC /24V DC	500mm
Wallwasher 24	on-off/DALI	54W	W/9450LM	90	220V-240V AC /24V DC	670mm
Wallwasher 36	on-off/DALI	80W	W/14000LM	90	220V-240V AC /24V DC	1000mm

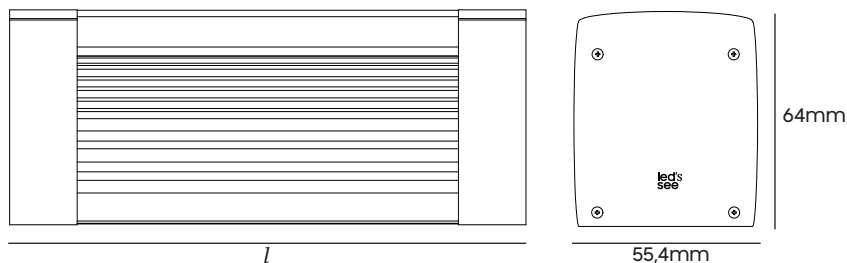

Mini Wallwasher

Wallwasher

Quick info

Body: Aluminum
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Mini Wallwasher 3	on-off/DALI	3W	W/555LM	90	220V-240V AC /24V DC	120mm
Mini Wallwasher 6	on-off/DALI	6W	W/1110LM	90	220V-240V AC /24V DC	200mm
Mini Wallwasher 9	on-off/DALI	9W	W/1665LM	90	220V-240V AC /24V DC	300mm
Mini Wallwasher 12	on-off/DALI	12W	W/2220LM	90	220V-240V AC /24V DC	350mm
Mini Wallwasher 18	on-off/DALI	18W	W/3330LM	90	220V-240V AC /24V DC	500mm
Mini Wallwasher 24	on-off/DALI	24W	W/4440LM	90	220V-240V AC /24V DC	670mm
Mini Wallwasher 36	on-off/DALI	36W	W/6660LM	90	220V-240V AC /24V DC	1000mm

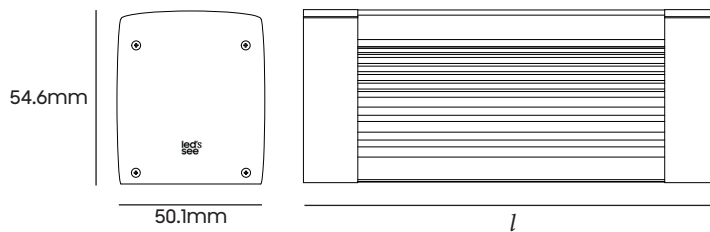

Mini Wallwasher 3

Mini Wallwasher 6

Mini Wallwasher 9

Mini Wallwasher 12

Mini Wallwasher 18

Mini Wallwasher 24


Mini Wallwasher 36

Recessed Wallwasher

Recessed Wallwasher



Rec. Wallwasher 3



Rec. Wallwasher 6



Rec. Wallwasher 9



Rec. Wallwasher 12



Rec. Wallwasher 18



Rec. Wallwasher 24



Rec. Wallwasher 36

Quick Info

Body: Aluminum
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Rec.Wallwasher 3	on-off/DALI	7W	W/1225LM	90	220V-240V AC /24V DC
Rec.Wallwasher 6	on-off/DALI	14W	W/2450LM	90	220V-240V AC /24V DC
Rec.Wallwasher 9	on-off/DALI	20W	W/3500LM	90	220V-240V AC /24V DC
Rec.Wallwasher 12	on-off/DALI	27W	W/4725LM	90	220V-240V AC /24V DC
Rec.Wallwasher 18	on-off/DALI	40W	W/7000LM	90	220V-240V AC /24V DC
Rec.Wallwasher 24	on-off/DALI	54W	W/9450LM	90	220V-240V AC /24V DC
Rec.Wallwasher 36	on-off/DALI	80W	W/14000LM	90	220V-240V AC /24V DC

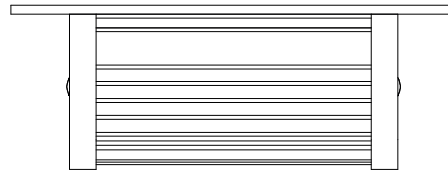

Product Code	Upper Frame Size	Bottom Body Size
Rec.Wallwasher 3	150 x 75 x 3mm	100 x 53 x 75mm
Rec.Wallwasher 6	220 x 75 x 3mm	170 x 53 x 75mm
Rec.Wallwasher 9	300 x 75 x 3mm	250 x 53 x 75mm
Rec.Wallwasher 12	375 x 75 x 3mm	325 x 53 x 75mm
Rec.Wallwasher 18	530 x 75 x 3mm	480 x 53 x 75mm
Rec.Wallwasher 24	690 x 75 x 3mm	640 x 53 x 75mm
Rec.Wallwasher 36	1010 x 75 x 3mm	960 x 53 x 75mm